

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5


Revisions			
REV.	DESCRIPTION	DATE	DRAWN BY
A	RELEASED	2/16/2017	JJH

D



C

B

A

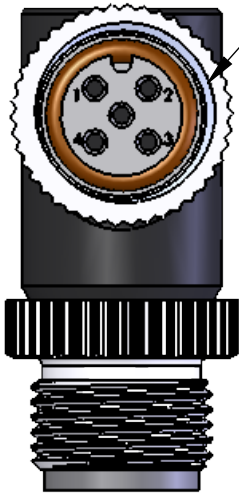

M12X1
FEMALE

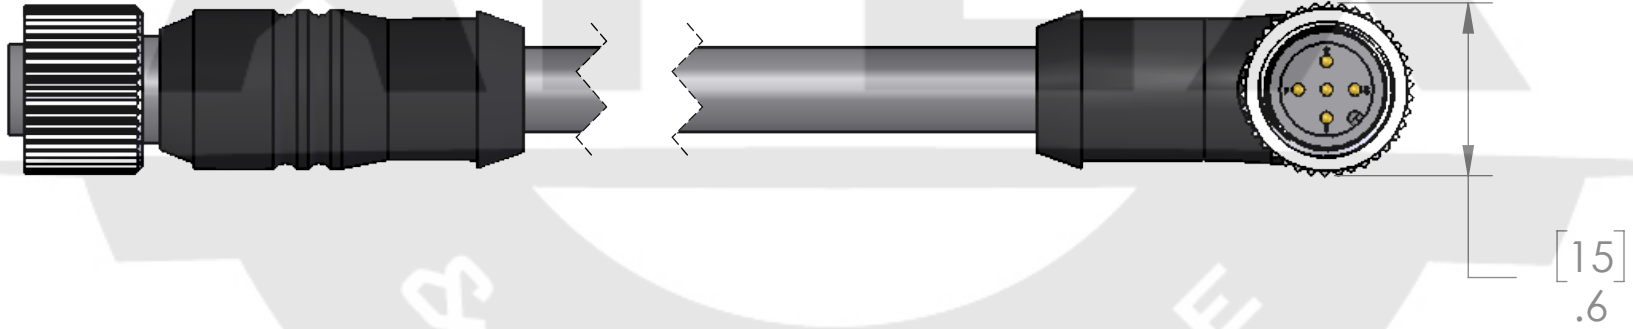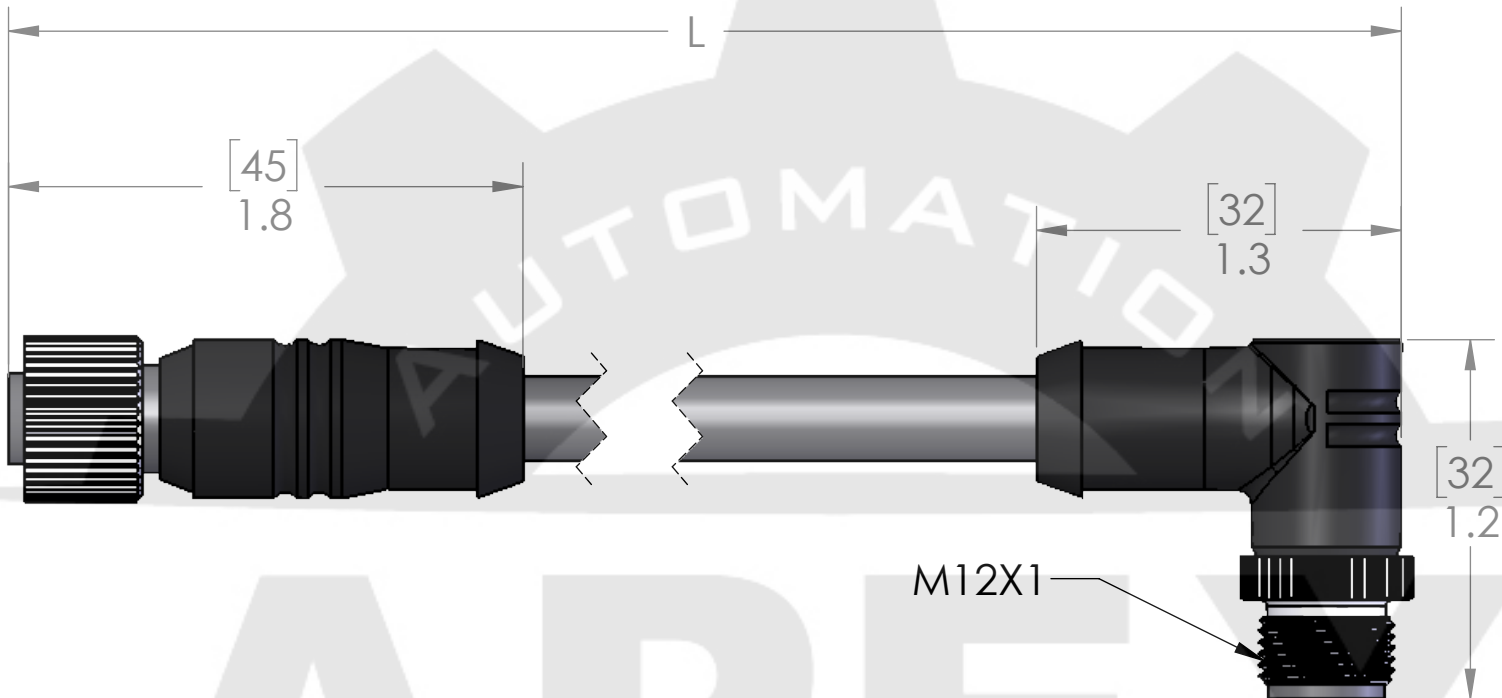

M12X1

TABLE A

P/N	L	STD?
MDCDD-5MRFP-0.5M	20" [0.5M]	NO
MDCDD-5MRFP-1M	40" [1M]	YES
MDCDD-5MRFP-2M	79" [2M]	YES
MDCDD-5MRFP-3M	118" [3M]	NO
MDCDD-5MRFP-4M	157" [4M]	NO
MDCDD-5MRFP-5M	197" [5M]	YES
MDCDD-5MRFP-6M	236" [6M]	NO
MDCDD-5MRFP-8M	315" [8M]	NO
MDCDD-5MRFP-10M	393" [10M]	YES
MDCDD-5MRFP-15M	590" [15M]	NO
MDCDD-5MRFP-20M	786" [20M]	NO

MATERIALS:	
BODY:	BLACK PVC
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLINGS:	NICKEL PLATED BRASS
O-RING:	NBR
CABLE:	DEVICENET DROP CABLE

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	04/13/2018
		CHECKED BY	DCG
		CHECK DATE	04/13/2018
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDCDD-5MRFP-ZZ	A
SCALE: 1.5:1		WEIGHT:
		SHEET 1 OF 1