REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	5/9/2005	

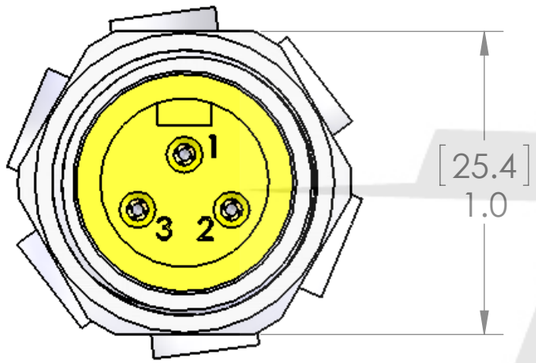

[25.4]
1.0

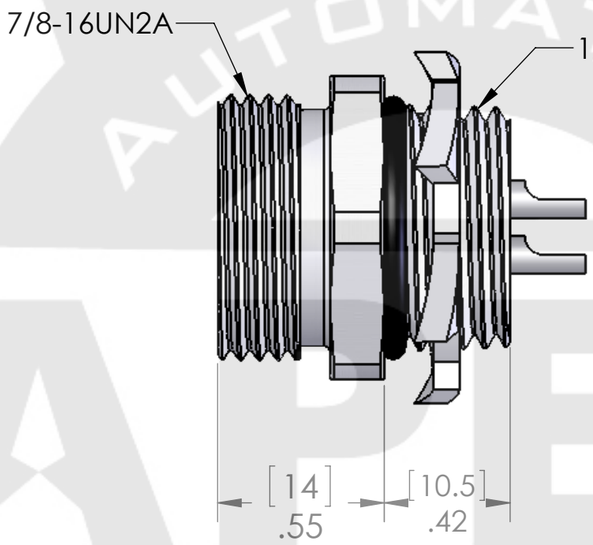

MATERIALS	
BODY:	STAINLESS STEEL
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	14 AWG MAX
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

AMPERAGE AND VOLTAGE ARE WIRE DEPENDANT. RATINGS LISTED ARE BASED ON 600V, 14AWG WIRE. SMALLER WIRES WITH LOWER VOLTAGE RATINGS WILL LOWER THESE VALUES.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	
VOLTS	600V MAX
AMPS	18A MAX
TEMP	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

3 POL FEM RECP.

SIZE	DWG. NO.	REV
B	MIN-3FR-SC-SS	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1