

WIRING
1 - 1
2 - 2
3 - 3
4 - 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/5/2014	RSC

D

D

C

C

B

B

A

A

SILICONE TUBE
Operating Temperatures, Continuous (min/max) degrees C -70/+200
Operating Temperatures, Intermittent (min/max) degrees C -80/+288

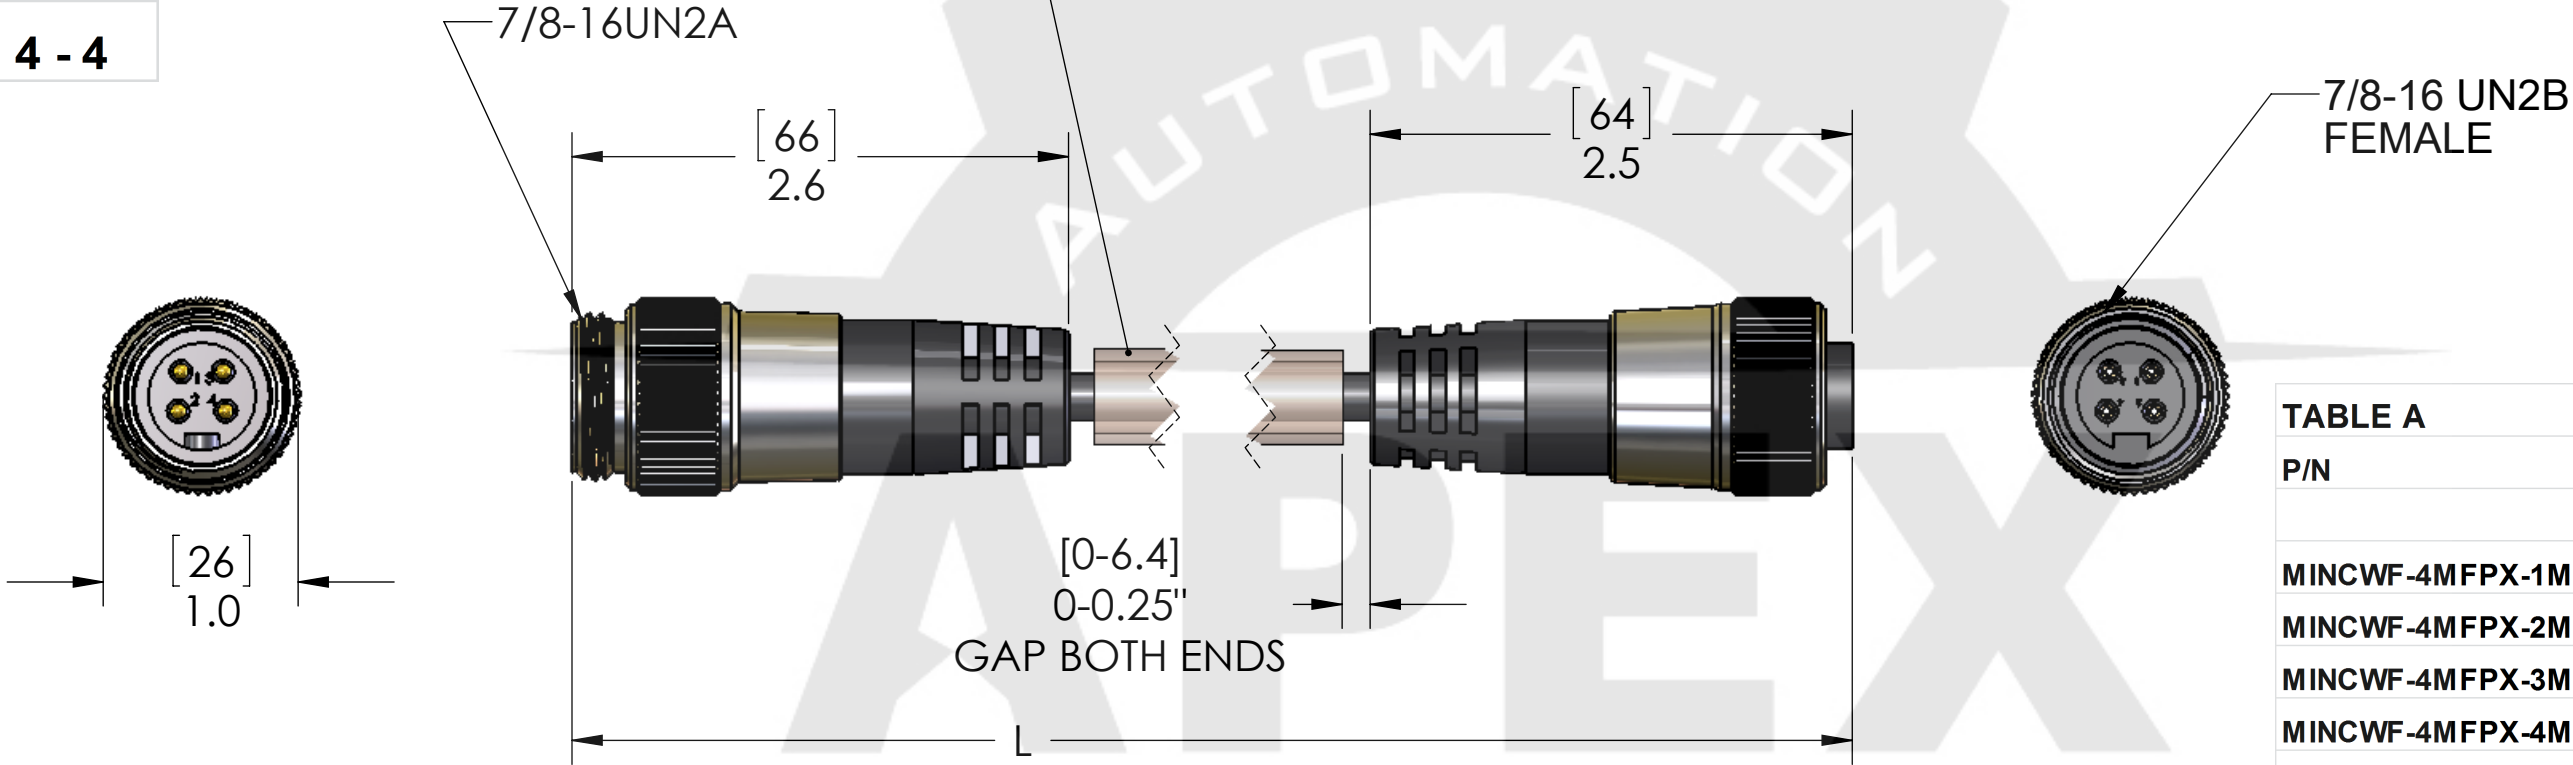


TABLE A		
P/N	L	STD?
MINCWF-4MFPX-1M-B-A50	40" [1m]	YES
MINCWF-4MFPX-2M-B-A50	79" [2m]	YES
MINCWF-4MFPX-3M-B-A50	118" [3m]	NO
MINCWF-4MFPX-4M-B-A50	157" [4m]	YES
MINCWF-4MFPX-5M-B-A50	197" [5m]	YES
MINCWF-4MFPX-6M-B-A50	236" [6m]	YES
MINCWF-4MFPX-8M-B-A50	315" [8m]	NO
MINCWF-4MFPX-10M-B-A50	393" [10m]	YES
MINCWF-4MFPX-15M-B-A50	590" [15m]	YES
MINCWF-4MFPX-20M-B-A50	786" [20m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDERS REQUIRED

MATERIALS	
BODY:	BLACK TPE
INSERT:	BLACK TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/4 CONTINUOUS FLEX EURO CC BLACK TPE JACKET. 20MM FLEXES, MIN BEND RADIUS IS 10x CABLE OD
COUPLING:	NICKEL PLATED BRASS
TUBING:	SILICONE TUBE NATURAL 50A DUROMETER

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME	JJH
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:
4 PL HI FLX EURO M-F EXT PLG 18AWG ARMRD

SIZE	DWG. NO.	REV
B	MINCWF-4MFPX-ZZ-B-A50	A

SCALE: 1:1 WEIGHT: SHEET 1 OF 1