

WIRING	
1 - 1	
2 - 2	
3 - 3	
4 - 4	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/5/2014	

D

D

C

C

B

B

A

A

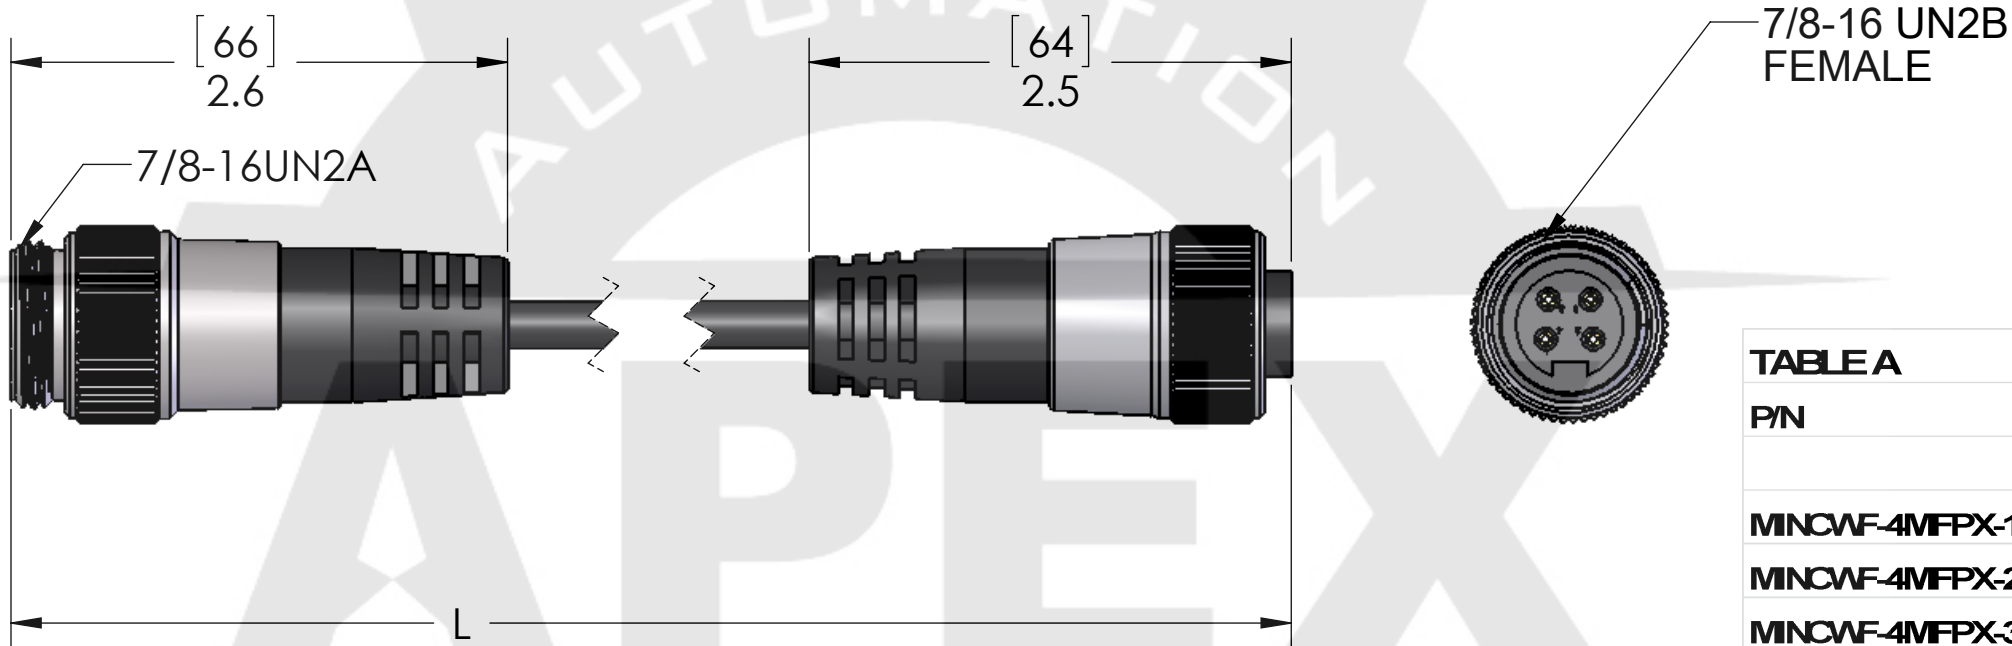


TABLE A		
P/N	L	STD?
MINCWF-4MFPX-1M-B	40' [1m]	YES
MINCWF-4MFPX-2M-B	79' [2m]	YES
MINCWF-4MFPX-3M-B	118' [3m]	NO
MINCWF-4MFPX-4M-B	157' [4m]	YES
MINCWF-4MFPX-5M-B	197' [5m]	YES
MINCWF-4MFPX-6M-B	236' [6m]	YES
MINCWF-4MFPX-8M-B	315' [8m]	NO
MINCWF-4MFPX-10M-B	393' [10m]	YES
MINCWF-4MFPX-15M-B	590' [15m]	YES
MINCWF-4MFPX-20M-B	786' [20m]	NO

PARTS LISTED AS NOT BEING STANDARD  
MAY HAVE MINIMUM ORDERS REQUIRED

MATERIALS	
BODY:	BLACK TPE
INSERT:	BLACK TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/4 CONTINUOUS FLEX EURO CC BLACK TPE JACKET. 10MM FLEXES, MIN BEND RADIUS IS 10x CABLE OD
COUPLING:	NICKEL PLATED BRASS

CERTIFICATIONS:	
US:	UL LISTED
CANADA:	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	90°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:  
4 PL HI FLX EURO M-F EXT PLG 18AWG

SIZE	DWG. NO.	REV
B	MINCWF-4MFPX-ZZ-B	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1