

FEM	WIRING	MALE
PIN #		PIN #
1	----	1
2	----	2
3	----	3
4	----	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/5/2014	RSC

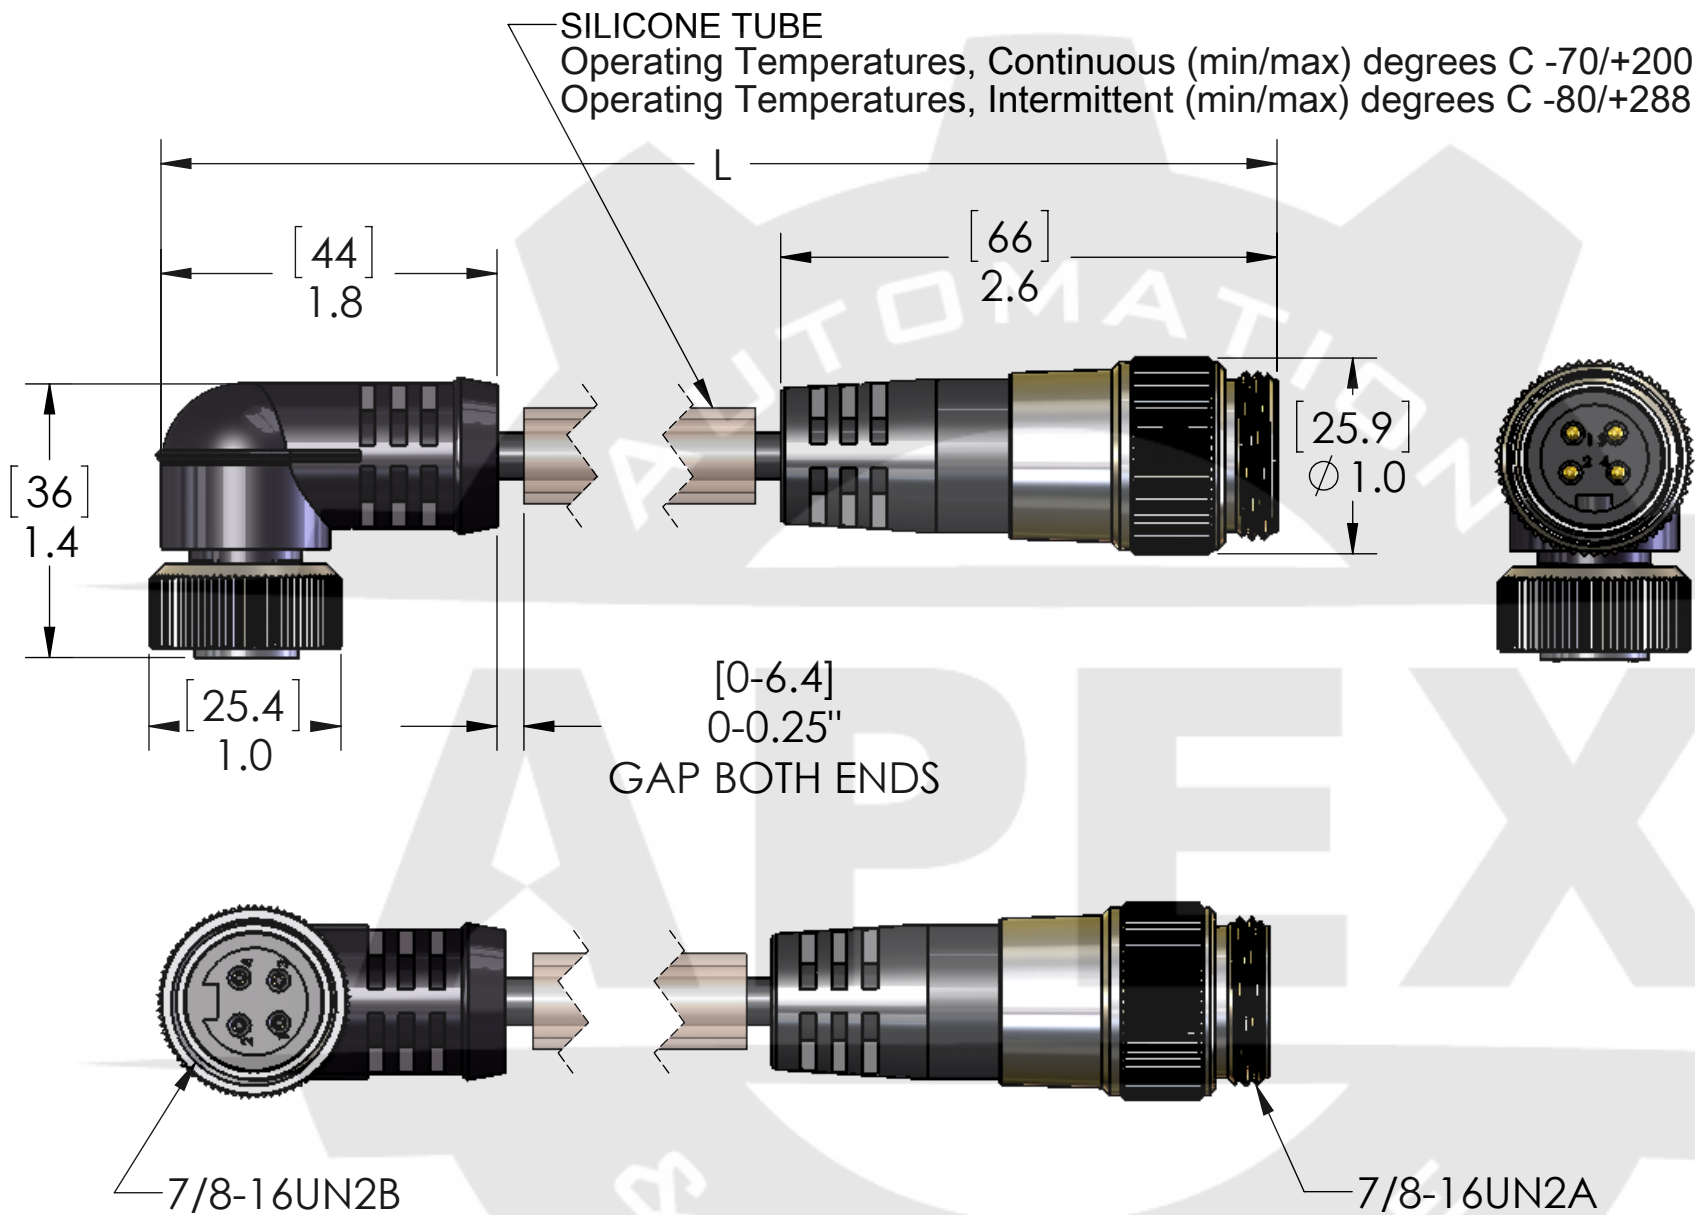


TABLE A		
P/N	L	STD?
MINCWF-4MFRPX-1M-B-A50	40" [1m]	YES
MINCWF-4MFRPX-2M-B-A50	79" [2m]	YES
MINCWF-4MFRPX-3M-B-A50	118" [3m]	NO
MINCWF-4MFRPX-4M-B-A50	157" [4m]	YES
MINCWF-4MFRPX-5M-B-A50	197" [5m]	NO
MINCWF-4MFRPX-6M-B-A50	236" [6m]	YES
MINCWF-4MFRPX-8M-B-A50	315" [8m]	NO
MINCWF-4MFRPX-10M-B-A50	393" [10m]	YES
MINCWF-4MFRPX-15M-B-A50	590" [15m]	NO
MINCWF-4MFRPX-20M-B-A50	786" [20m]	NO

NOTE: TUBING WILL NOT BE OVERMOLDED. EXPOSED CABLE ON ONE END COULD BE AS HIGH AS 0.25", BUT THIS MEANS THE CABLE WILL BE BUTTING UP AGAINST THE CONNECTOR ON THE OTHER END. IF TUBING IS CENTERED BETWEEN CONNECTORS, THE MAXIMUM EXPOSED CABLE WILL BE 0.125".

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK TPE
INSERT:	BLACK TPE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/4 CONTINUOUS FLEX EURO CC BLACK TPE JACKET. 20MM FLEXES, MIN BEND RADIUS IS 10x CABLE OD
COUPLING:	NICKEL PLATED BRASS
TUBING:	SILICONE TUBE NATURAL 50A DUROMETER

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME
DRAWN
CHECKED
ENG APPR.
MFG APPR.
Q.A.
COMMENTS:

MENCOM CORPORATION

TITLE:

4 PL HI FLX EURO M- RA F EXT PLG R/A 18AWG ARMRD

SIZE	DWG. NO.	REV
B	MINCWF-4MFRPX-ZZ-B-A50	A

SCALE: 1:1 WEIGHT: SHEET 1 OF 1