

WIRING		
MIN		MDC
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5

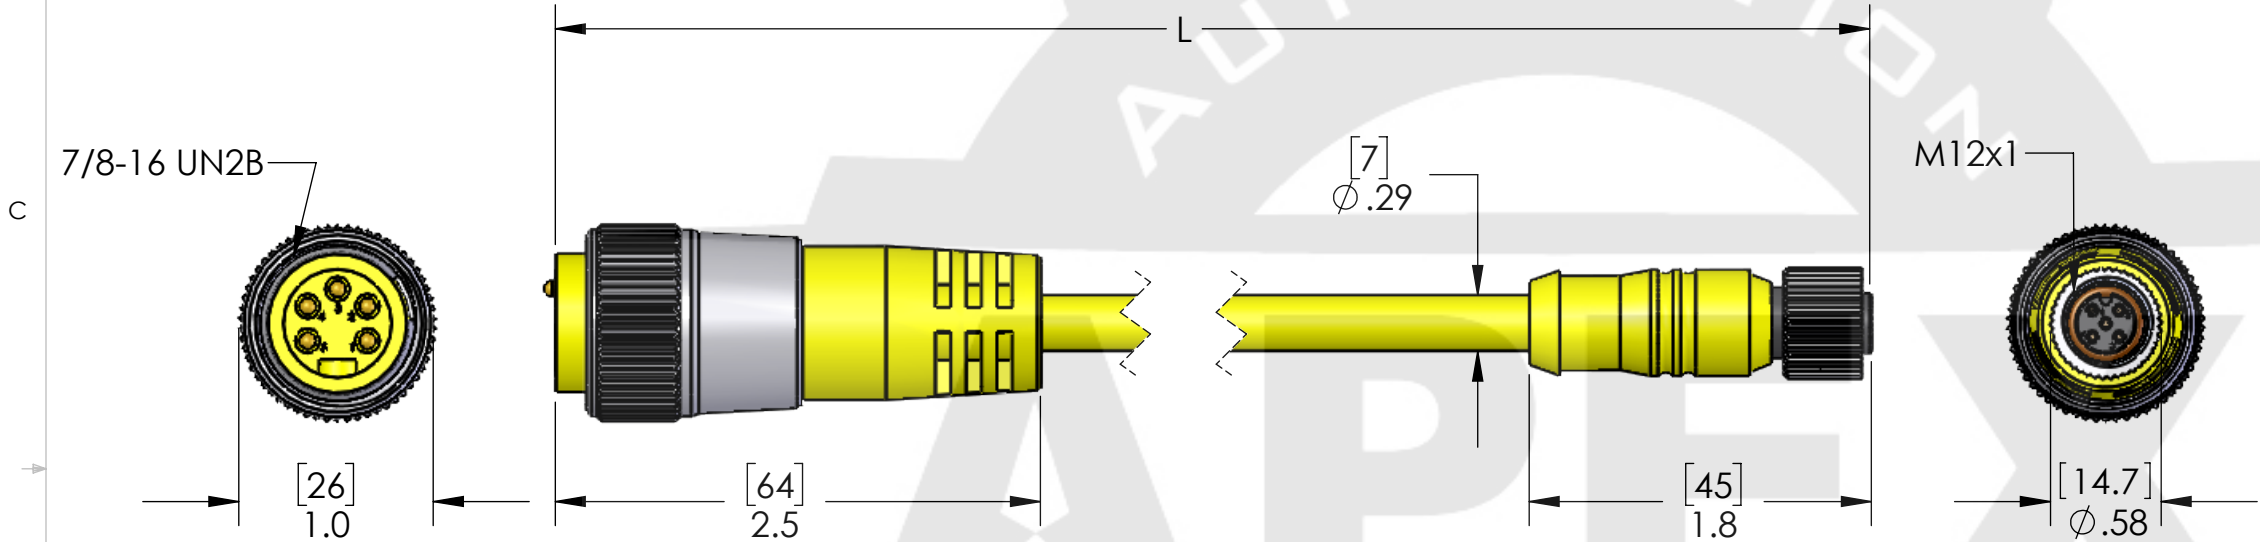


TABLE A		
P/N	L	STD?
MINDC-5MFP-0.5M	20" [0.5M]	NO
MINDC-5MFP-1M	40" [1M]	YES
MINDC-5MFP-2M	79" [2M]	YES
MINDC-5MFP-3M	118" [3M]	NO
MINDC-5MFP-4M	157" [4M]	YES
MINDC-5MFP-5M	197" [5M]	YES
MINDC-5MFP-6M	236" [6M]	YES
MINDC-5MFP-8M	315" [8M]	NO
MINDC-5MFP-10M	393" [10M]	YES
MINDC-5MFP-15M	590" [15M]	YES
MINDC-5MFP-20M	786" [20M]	NO
MINDC-5MFP-25M	983" [25M]	NO
MINDC-5MFP-30M	1179" [30M]	NO

MATERIALS	
BODIES:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/5 YELLOW PVC JACKET
COUPLINGS:	NICKEL PLATED BRASS
INSERTS:	M12: POLYAMIDE; MIN: PVC
O-RING:	FPM

APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED
RoHS:	YES
CE:	YES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	08/25/2020
	CHECKED BY	ADM
	CHECK DATE	08/25/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MINDC-5MFP-ZZ	B
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1