


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005

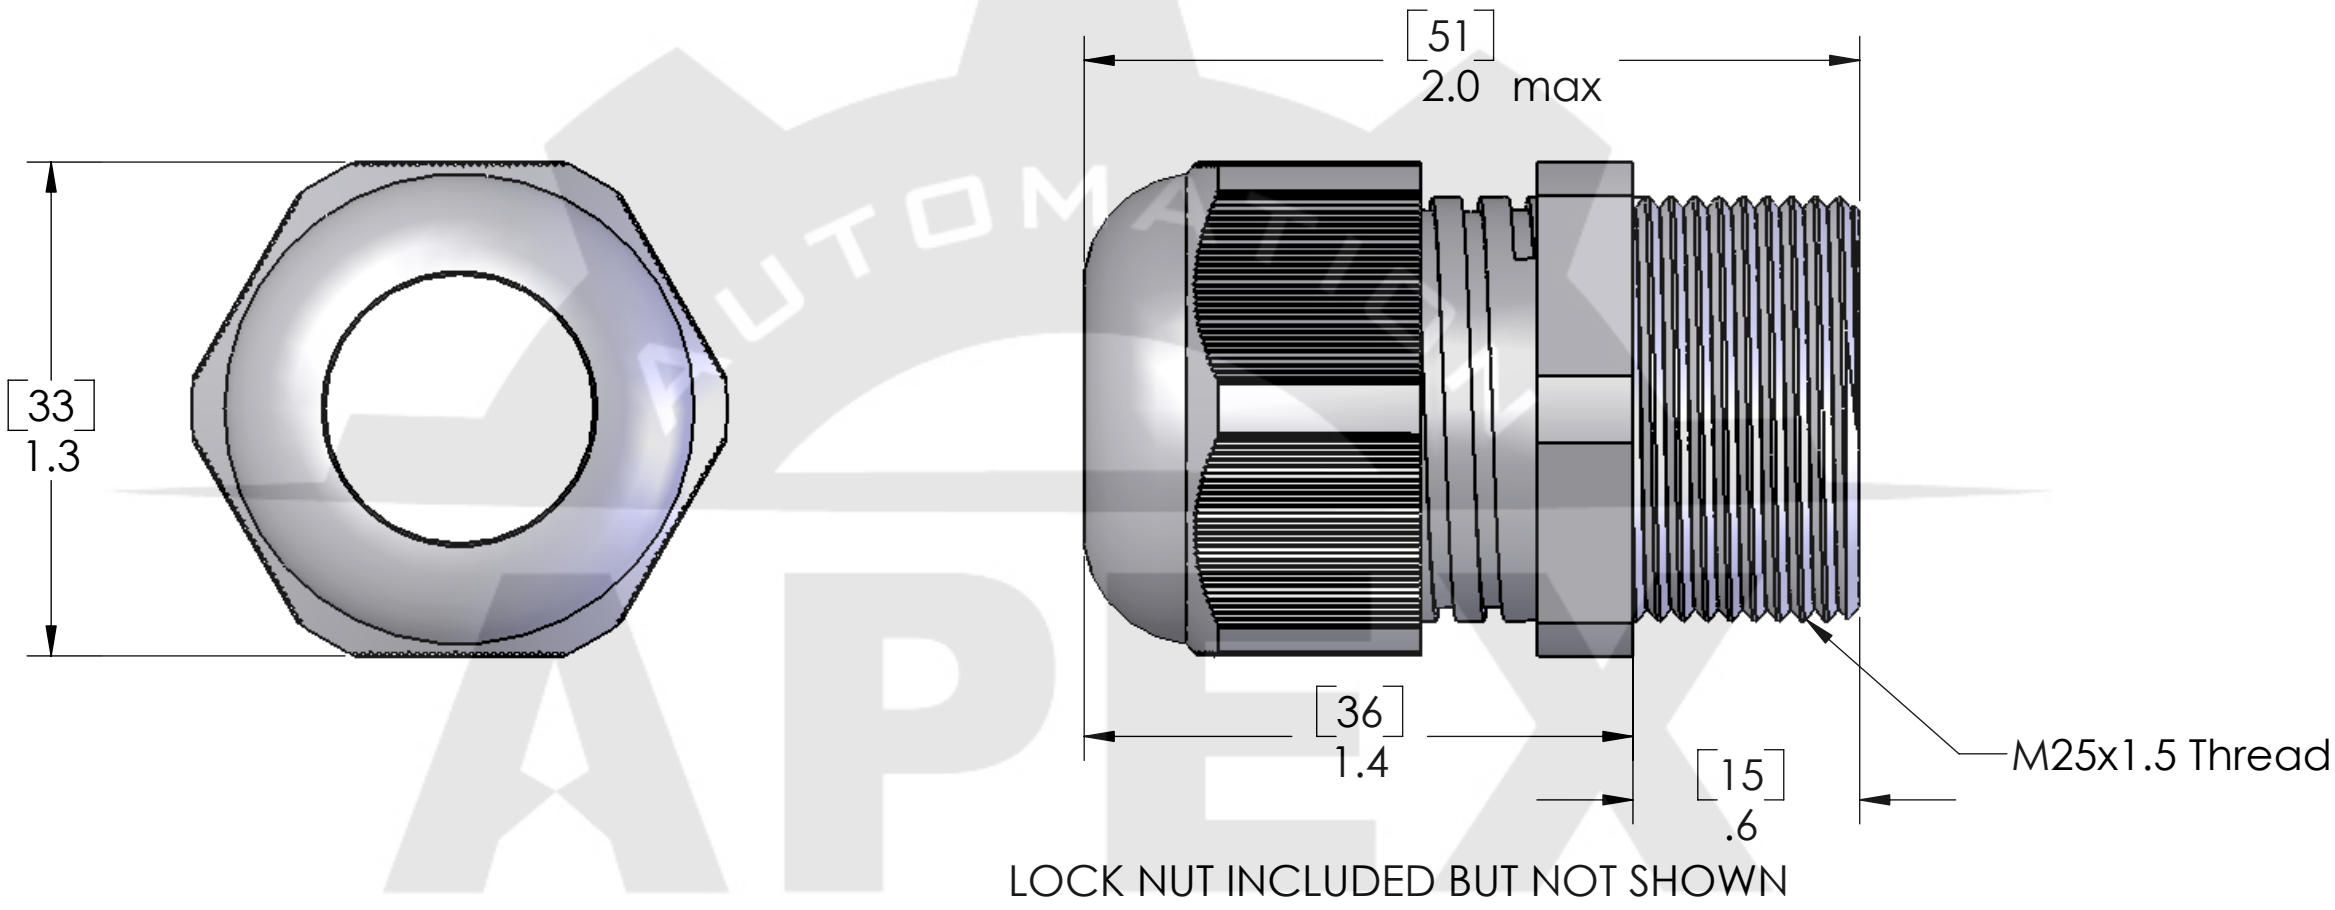

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL.
CRUSH RIBS ON THE UNDERSIDE OF HEX WILL
PROVIDE THE SEAL.

SEAL RATED TO: IP68

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	5.0 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-M25L	GRAY	13-18mm
PCG-M25RL	GRAY	9-16mm
PCG-M25L-B	BLACK	13-18mm
PCG-M25RL-B	BLACK	9-16mm

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION		
DIMENSIONS ARE IN INCHES		DRAWN	BEM		TITLE:	
		CHECKED				
		ENG APPR.				
		MFG APPR.				
		Q.A.				
MATERIAL		COMMENTS:		SIZE	DWG. NO.	REV
FINISH				B	PCG-M25L	A
DO NOT SCALE DRAWING				SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.