

## Data

### Electrical data

|                         |      |
|-------------------------|------|
| Rated current (Ex e II) | 12 A |
|-------------------------|------|

### Ratings per IEC/EN 60664-1

|                         |       |
|-------------------------|-------|
| Rated voltage (III / 3) | 800 V |
| Rated current           | 14 A  |

### Geometrical Data

|        |                     |
|--------|---------------------|
| Width  | 34 mm / 1.339 inch  |
| Height | 19 mm / 0.748 inch  |
| Depth  | 4.1 mm / 0.161 inch |

### Material Data

|           |          |
|-----------|----------|
| Color     | red      |
| Fire load | 0.023 MJ |
| Weight    | 2.91 g   |

### Commercial data

|                    |               |
|--------------------|---------------|
| Product Group      | 22 (TOPJOB S) |
| Country of origin  | DE            |
| GTIN               | 4055143698252 |
| Customs Tariff No. | 85366990990   |




Downloads  
Documentation  
Bid Text

|                  |                |          |
|------------------|----------------|----------|
| 2000-410/000-005 | doc<br>24.1 kB | Download |
|------------------|----------------|----------|

|                        |               |          |
|------------------------|---------------|----------|
| Additional Information | pdf<br>2.1 MB | Download |
|------------------------|---------------|----------|

CAD/CAE - Smart Data  
CAD data

|                              |     |          |
|------------------------------|-----|----------|
| 3D Download 2000-410/000-005 | URL | Download |
|------------------------------|-----|----------|

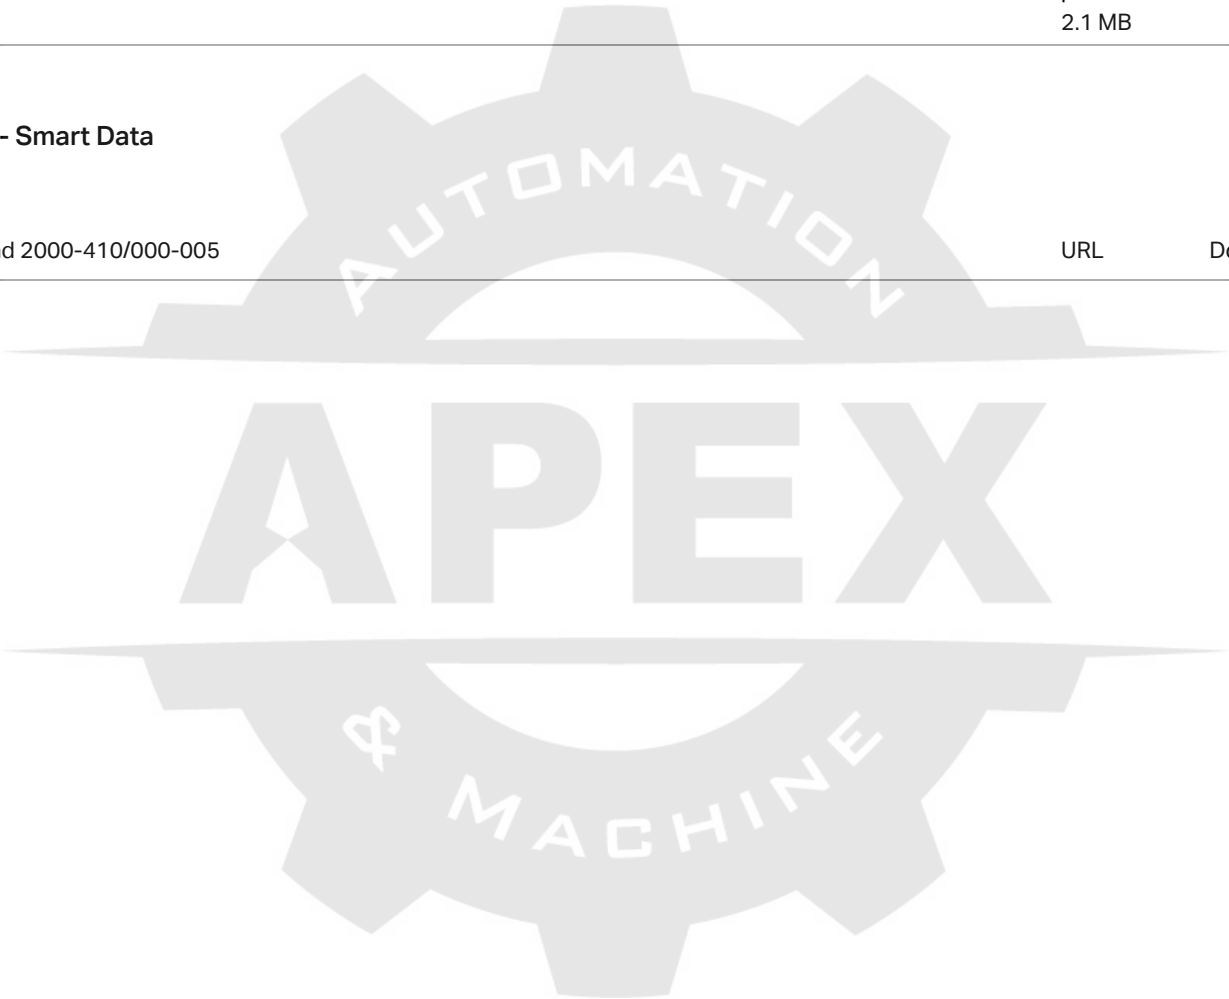

Subject to changes.