



## Data sheet | Item number: 2002-3201

Triple-deck terminal block; Through/through/through terminal block; L/L/L;  
without marker carrier; suitable for Ex e II applications; for DIN-rail 35 x 15  
and 35 x 7.5; 2.5 mm<sup>2</sup>; Push-in CAGE CLAMP®

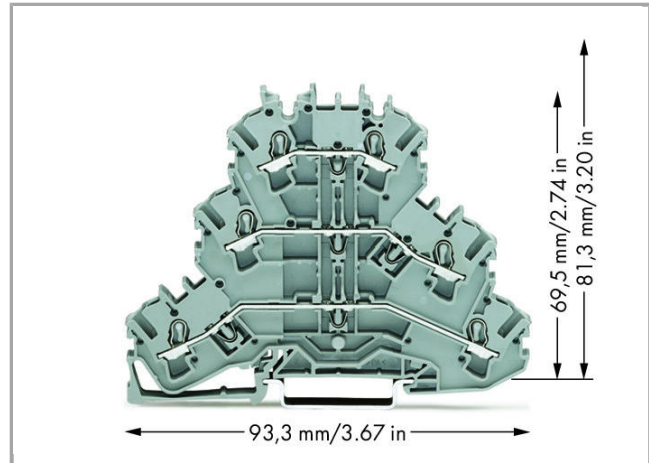


2002-3201

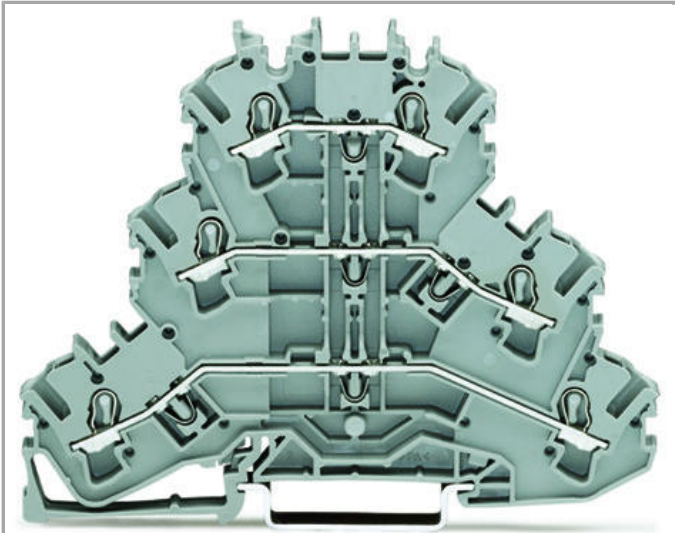

RoHS  
Compliant ✓

[BOMcheck.net](https://www.bomcheck.net)

Color: ■

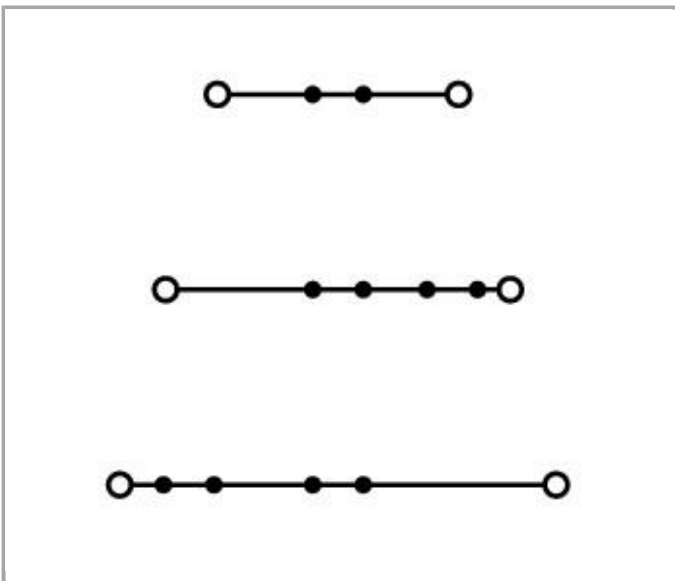

### Data

#### Electrical data

Rated voltage EN (Ex e II)

440 V

|                                     |      |
|-------------------------------------|------|
| Rated current (Ex e II)             | 19 A |
| Rated current (Ex e II) with jumper | 17 A |

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 500 V |
| Rated impulse voltage (III / 3) | 6 kV  |
| Rated current                   | 24 A  |
| Rated current (2)               | 28 A  |

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 20 A  |
| Rated voltage UL (Use Group C) | 300 V |
| Rated current UL (Use Group C) | 20 A  |
| Rated voltage UL (Use Group D) | 600 V |
| Rated current UL (Use Group D) | 5 A   |

#### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 600 V |
| Rated current CSA (Use Group B) | 20 A  |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 20 A  |

#### Connection data

|                                               |                                                                                                                                   |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                         | Push-in CAGE CLAMP®                                                                                                               |
| Number of connection points (connection type) | 3                                                                                                                                 |
| Actuation type                                | Push-in<br>Open Tool Slot                                                                                                         |
| Connectable conductor materials               | Copper                                                                                                                            |
| Nominal cross section                         | 2.5 mm²                                                                                                                           |
| Solid conductor                               | 0.25 ... 4 mm² / 22 ... 12 AWG                                                                                                    |
| Solid conductor, push-in termination          | 0.75 ... 4 mm² / 18 ... 12 AWG                                                                                                    |
| Fine-stranded conductor                       | 0.25 ... 4 mm² / 22 ... 12 AWG                                                                                                    |
| Strip length                                  | 10 ... 12 mm / 0.39 ... 0.47 inch                                                                                                 |
| Number of connection points                   | 3                                                                                                                                 |
| Note (conductor cross-section)                | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |
| Total number of connection points             | 6                                                                                                                                 |
| Total number of potentials                    | 3                                                                                                                                 |
| Number of levels                              | 3                                                                                                                                 |

|                |                    |
|----------------|--------------------|
| Type of wiring | Front-entry wiring |
|----------------|--------------------|

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 5.2 mm / 0.205 inch  |
| Height from upper-edge of DIN-35 rail | 69.5 mm / 2.736 inch |
| Depth                                 | 93.3 mm / 3.673 inch |

## Mechanical data

|                   |                     |
|-------------------|---------------------|
| Design            | horizontal          |
| Type of mounting  | DIN-35 rail         |
| Potential marking | L/L/L               |
| Marking level     | Center/side marking |

## Material Data


|                     |                      |
|---------------------|----------------------|
| Color               | gray                 |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 0.316 MJ             |
| Weight              | 16.845 g             |

## Commercial data

|                    |               |
|--------------------|---------------|
| Product Group      | 22 (TOPJOB S) |
| Country of origin  | DE            |
| GTIN               | 4044918691185 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                            | Additional Approval Text | Certificate name                                                       |
|------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------|------------------------------------------------------------------------|
|  | AEx<br>Underwriters Laboratories Inc.               | UL 60079                 | E185892                                                                |
|  | ATEX<br>Physikalisch Technische Bundesanstalt (PTB) | EN 60079                 | PTB 03<br>ATEX<br>1162 U (II<br>2 G/D Ex e<br>II bzw. I M<br>2 Ex e I) |

### Country specific Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|------|----------|--------------------------|------------------|
|------|----------|--------------------------|------------------|

|                                                                                  |                                              |               |               |
|----------------------------------------------------------------------------------|----------------------------------------------|---------------|---------------|
|  | <b>CSA</b><br>DEKRA Certification B.V.       | C22.2 No. 158 | 1536069       |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60947      | 71-<br>107687 |

#### Ship Approvals

| Logo                                                                              | Approval                                                | Additional Approval Text | Certificate name         |
|-----------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | EN 60947                 | 14-<br>HG1293677-<br>PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | EN 60947                 | 38586/A0 BV              |
|  | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2               |

#### UL-Approvals

| Logo                                                                               | Approval                                       | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|------------------------------------------------|--------------------------|------------------|
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |
|  | <b>UR</b><br>DEKRA Certification B.V.          | EN 60947                 | NTR NL<br>7730   |

#### Compatible products

#### Carrier rail

|                                                                                    |                                                                                                                                      |         |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm | 210-112 |
|    | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                  | 210-113 |
|    | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                   | 210-114 |
|    | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm | 210-115 |
|    | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                 | 210-118 |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715               | 210-196 |
|   | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                     | 210-197 |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                | 210-198 |
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715        | 210-504 |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715      | 210-505 |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715       | 210-506 |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715         | 210-508 |

#### End plate

|                                                                                    |                                                                        |           |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------|
|  | <b>Item no.: 2002-3291</b><br>End and intermediate plate; 0.8 mm thick | 2002-3291 |
|  | <b>Item no.: 2002-3292</b><br>End and intermediate plate; 0.8 mm thick | 2002-3292 |

#### Insulation stop

|                                                                                    |                                                                              |          |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------|
|  | <b>Item no.: 2002-171</b><br>Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip | 2002-171 |
|  | <b>Item no.: 2002-172</b><br>Insulation stop; 0.75 - 1 mm²; 5 pieces/strip   | 2002-172 |

#### Marking accessories

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2002-161</b><br>Adaptor                                                                                          |          | 2002-161 |
|    | <b>Item no.: 2009-110</b><br>Marking strips; on reel; not stretchable; plain; snap-on type                                    |          | 2009-110 |
|    | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type              |          | 2009-115 |
|    | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-002 | 2009-115 |
|    | <b>Item no.: 2009-115/000-005</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-005 | 2009-115 |
|    | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-006 | 2009-115 |
|    | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-007 | 2009-115 |
|    | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-012 | 2009-115 |
|    | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-017 | 2009-115 |
|   | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-023 | 2009-115 |
|  | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-024 | 2009-115 |
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         |          | 2009-145 |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-002 | 2009-145 |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-005 | 2009-145 |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-006 | 2009-145 |
|  | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-007 | 2009-145 |

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-012 | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | /000-023 | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-024 | 2009-145 |
|    | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                             |          | 2009-191 |
|    | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                             |          | 2009-192 |
|    | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                             |          | 2009-193 |
|    | <b>Item no.: 2009-198</b><br>Adaptor                                                                                          |          | 2009-198 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-002 | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-017 | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-023 | 248-501  |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-024 | 248-501  |



**Item no.: 793-501**  
WMB marking card; as card; not stretchable; plain; snap-on type

793-501



**Item no.: 793-501/000-002**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-002

793-501



**Item no.: 793-501/000-005**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-005

793-501



**Item no.: 793-501/000-006**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-006

793-501



**Item no.: 793-501/000-007**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-007

793-501



**Item no.: 793-501/000-012**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-012

793-501



**Item no.: 793-501/000-017**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-017

793-501



**Item no.: 793-501/000-023**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-023

793-501



**Item no.: 793-501/000-024**  
WMB marking card; as card; not stretchable; plain; snap-on type

/000-024

793-501



**Item no.: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

793-5501



**Item no.: 793-5501/000-002**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

/000-002

793-5501



**Item no.: 793-5501/000-005**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-005

793-5501



**Item no.: 793-5501/000-006**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-006

793-5501



**Item no.: 793-5501/000-007**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-007

793-5501



**Item no.: 793-5501/000-012**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-012

793-5501





**Item no.: 793-5501/000-014**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-014

793-5501



**Item no.: 793-5501/000-017**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-017

793-5501



**Item no.: 793-5501/000-023**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-023

793-5501



**Item no.: 793-5501/000-024**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-024

793-5501

#### tools



**Item no.: 210-658**  
Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled

210-658



**Item no.: 210-720**  
Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720

#### Protective Warning Marker



**Item no.: 2002-115**  
Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks

2002-115

#### ferrule



**Item no.: 216-241**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-241



**Item no.: 216-242**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-242



**Item no.: 216-243**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-243



**Item no.: 216-244**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-244



**Item no.: 216-246**  
Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-246



**Item no.: 216-262**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-262



**Item no.: 216-263**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-263



**Item no.: 216-264**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-264



**Item no.: 216-266**  
Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90

216-266


## General accessories

|                                                                                    |                                                                                                                          |                      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 2002-131</b><br>Adaptor                                                                                     | 2002-131             |
| <b>check</b>                                                                       |                                                                                                                          |                      |
|    | <b>Item no.: 2002-611</b><br>TOPJOB®S L-type test plug module; modular; 1-pole                                           | 2002-611             |
|    | <b>Item no.: 2002-649</b><br>TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks         | 2002-649             |
|     | <b>Item no.: 2009-174</b><br>Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks | 2009-174             |
|    | <b>Item no.: 2009-182</b><br>Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm | 2009-182             |
| <b>Jumper</b>                                                                      |                                                                                                                          |                      |
|    | <b>Item no.: 2002-400</b><br>Adjacent jumper for continuous commoning; insulated; 2-way; Nominal current 25 A            | 2002-400             |
|    | <b>Item no.: 2002-402</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A                             | 2002-402             |
|    | <b>Item no.: 2002-402/000-005</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A                     | 2002-402<br>/000-005 |
|  | <b>Item no.: 2002-402/000-006</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 25 A                     | 2002-402<br>/000-006 |
|  | <b>Item no.: 2002-403</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A                             | 2002-403             |
|  | <b>Item no.: 2002-403/000-005</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A                     | 2002-403<br>/000-005 |
|  | <b>Item no.: 2002-403/000-006</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 25 A                     | 2002-403<br>/000-006 |
|  | <b>Item no.: 2002-404</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A                             | 2002-404             |
|  | <b>Item no.: 2002-404/000-005</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A                     | 2002-404<br>/000-005 |
|  | <b>Item no.: 2002-404/000-006</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 25 A                     | 2002-404<br>/000-006 |
|  | <b>Item no.: 2002-405</b><br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A                             | 2002-405             |

|                                                                                    |                                                                                                   |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------|
|    | Item no.: 2002-405/000-005<br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A     | 2002-405 |
|                                                                                    | /000-005                                                                                          |          |
|    | Item no.: 2002-405/000-006<br>Push-in type jumper bar; insulated; 5-way; Nominal current 25 A     | 2002-405 |
|                                                                                    | /000-006                                                                                          |          |
|    | Item no.: 2002-405/011-000<br>Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block | 2002-405 |
|                                                                                    | /011-000                                                                                          |          |
|    | Item no.: 2002-406<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A             | 2002-406 |
|    | Item no.: 2002-406/000-005<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A     | 2002-406 |
|                                                                                    | /000-005                                                                                          |          |
|    | Item no.: 2002-406/000-006<br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A     | 2002-406 |
|                                                                                    | /000-006                                                                                          |          |
|    | Item no.: 2002-406/020-000<br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block        | 2002-406 |
|                                                                                    | /020-000                                                                                          |          |
|  | Item no.: 2002-407<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A             | 2002-407 |
|  | Item no.: 2002-407/000-005<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A     | 2002-407 |
|                                                                                    | /000-005                                                                                          |          |
|  | Item no.: 2002-407/000-006<br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A     | 2002-407 |
|                                                                                    | /000-006                                                                                          |          |
|  | Item no.: 2002-408<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A             | 2002-408 |
|  | Item no.: 2002-408/000-005<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A     | 2002-408 |
|                                                                                    | /000-005                                                                                          |          |
|  | Item no.: 2002-408/000-006<br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A     | 2002-408 |
|                                                                                    | /000-006                                                                                          |          |
|  | Item no.: 2002-409<br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A             | 2002-409 |
|  | Item no.: 2002-409/000-005<br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A     | 2002-409 |
|                                                                                    | /000-005                                                                                          |          |
|  | Item no.: 2002-409/000-006<br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A     | 2002-409 |
|                                                                                    | /000-006                                                                                          |          |

|                                                                                    |                                                                                                                                                                                 |                      |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 2002-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A                                                                                   | 2002-410             |
|    | <b>Item no.: 2002-410/000-005</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A                                                                           | 2002-410<br>/000-005 |
|    | <b>Item no.: 2002-410/000-006</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A                                                                           | 2002-410<br>/000-006 |
|    | <b>Item no.: 2002-423</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A                                                             | 2002-423             |
|    | <b>Item no.: 2002-423/000-005</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A                                                     | 2002-423<br>/000-005 |
|    | <b>Item no.: 2002-423/000-006</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A                                                     | 2002-423<br>/000-006 |
|    | <b>Item no.: 2002-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 25 A                                                                              | 2002-433             |
|   | <b>Item no.: 2002-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 25 A                                                                              | 2002-434             |
|  | <b>Item no.: 2002-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 25 A                                                                              | 2002-435             |
|  | <b>Item no.: 2002-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 25 A                                                                              | 2002-436             |
|  | <b>Item no.: 2002-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 25 A                                                                              | 2002-437             |
|  | <b>Item no.: 2002-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 25 A                                                                              | 2002-438             |
|  | <b>Item no.: 2002-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 25 A                                                                              | 2002-439             |
|  | <b>Item no.: 2002-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 25 A                                                                             | 2002-440             |
|  | <b>Item no.: 2002-472</b><br>Staggered jumper; insulated; 2-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                           | 2002-472             |
|  | <b>Item no.: 2002-473</b><br>Staggered jumper; insulated; 3-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                           | 2002-473             |
|                                                                                    | <b>Item no.: 2002-473/011-000</b><br>Ready-made staggered jumper; insulated; 2-way (1-3); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking | 2002-473<br>/011-000 |
|                                                                                    | <b>Item no.: 2002-474</b>                                                                                                                                                       |                      |

|                                                                                    |                                                                                                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | Staggered jumper; insulated; 4-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                                                      |          | 2002-474 |
|    | <b>Item no.: 2002-475</b><br>Staggered jumper; insulated; 5-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                         |          | 2002-475 |
|                                                                                    | <b>Item no.: 2002-475/011-000</b><br>Ready-made staggered jumper; insulated; 3-way (1-3-5); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking                             | /011-000 | 2002-475 |
|    | <b>Item no.: 2002-476</b><br>Staggered jumper; insulated; 6-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                         |          | 2002-476 |
|    | <b>Item no.: 2002-477</b><br>Staggered jumper; insulated; 7-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                         |          | 2002-477 |
|    | <b>Item no.: 2002-477/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking                                   | /011-000 | 2002-477 |
|    | <b>Item no.: 2002-478</b><br>Staggered jumper; insulated; 8-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                         |          | 2002-478 |
|    | <b>Item no.: 2002-479</b><br>Staggered jumper; insulated; 9-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                         |          | 2002-479 |
|                                                                                    | <b>Item no.: 2002-479/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7-9; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking                                 | /011-000 | 2002-479 |
|  | <b>Item no.: 2002-480</b><br>Staggered jumper; insulated; 10-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                        |          | 2002-480 |
|  | <b>Item no.: 2002-481</b><br>Staggered jumper; insulated; 11-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                        |          | 2002-481 |
|                                                                                    | <b>Item no.: 2002-481/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7-9-11; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking                              | /011-000 | 2002-481 |
|  | <b>Item no.: 2002-482</b><br>Staggered jumper; insulated; 12-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks                                                        |          | 2002-482 |
|  | <b>Item no.: 2002-492</b><br>Double-deck vertical jumper; insulated                                                                                                                                           |          | 2002-492 |
|  | <b>Item no.: 2002-492/000-012</b><br>Double-deck vertical jumper; insulated                                                                                                                                   | /000-012 | 2002-492 |
|  | <b>Item no.: 2002-493</b><br>Triple-deck vertical jumper; insulated                                                                                                                                           |          | 2002-493 |
|  | <b>Item no.: 2009-412</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks |          | 2009-412 |

|                                                                                  |                                                                                                                                                                                                                        |                      |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|  | <b>Item no.: 2009-414</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks         | 2009-414             |
|  | <b>Item no.: 2009-414/000-005</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks | 2009-414<br>/000-005 |
|  | <b>Item no.: 2009-414/000-006</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks | 2009-414<br>/000-006 |
|  | <b>Item no.: 2009-416</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 1.5 mm <sup>2</sup> ; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks         | 2009-416             |
|  | <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; 50 connections                                                                                                                                            | 210-103              |
|  | <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; 50 connections                                                                                                                                            | 210-123              |

## Downloads

## Documentation

## Bid Text

|                         |             |                 |          |
|-------------------------|-------------|-----------------|----------|
| 2002-3201               | Apr 4, 2012 | docx<br>15.9 kB | Download |
| Reihenklemmen, TOPJOB S |             |                 |          |

## Additional Information

pdf  
2.1 MB

Download

## CAD/CAE - Smart Data

## CAD data

|                       |     |          |
|-----------------------|-----|----------|
| 3D Download 2002-3201 | URL | Download |
|-----------------------|-----|----------|

Subject to changes.