



**Data sheet | Item number: 2002-6404**

4-conductor through terminal block; 2.5 mm<sup>2</sup>; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®

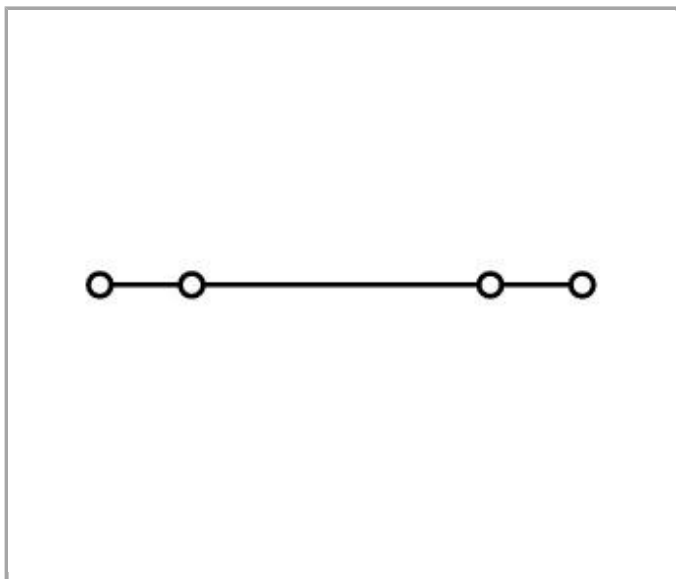

2002-6404

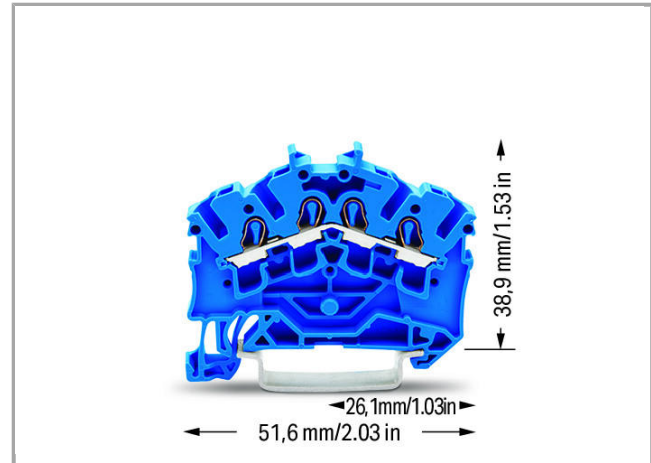

**Item description**

**Safety information 1:**



**Notice:** This terminal block cannot be commoned with push-in type jumper bars.

**Safety information 2:**

An end plate must be applied when changing from a 3-conductor terminal block to a 4-conductor terminal block and vice versa.

## Data

### Electrical data

|                                     |       |
|-------------------------------------|-------|
| Rated voltage EN (Ex e II)          | 550 V |
| Rated current (Ex e II)             | 22 A  |
| Rated current (Ex e II) with jumper | 20 A  |

### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 800 V |
| Rated impulse voltage (III / 3) | 8 kV  |
| Rated current                   | 24 A  |
| Rated current (2)               | 32 A  |

### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 600 V |
| Rated current UL (Use Group B) | 20 A  |
| Rated voltage UL (Use Group C) | 600 V |
| Rated current UL (Use Group C) | 20 A  |

### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 600 V |
| Rated current CSA (Use Group B) | 20 A  |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 20 A  |

### Connection data

|                                      |                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                       | Push-in<br>Open Tool Slot                                                                                                         |
| Connectable conductor materials      | Copper                                                                                                                            |
| Nominal cross section                | 2.5 mm²                                                                                                                           |
| Solid conductor                      | 0.25 ... 4 mm² / 22 ... 12 AWG                                                                                                    |
| Solid conductor, push-in termination | 0.75 ... 4 mm² / 18 ... 12 AWG                                                                                                    |
| Fine-stranded conductor              | 0.25 ... 4 mm² / 22 ... 12 AWG                                                                                                    |
| Strip length                         | 10 ... 12 mm / 0.39 ... 0.47 inch                                                                                                 |
| Note (conductor cross-section)       | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |

|                                   |                    |
|-----------------------------------|--------------------|
| Total number of connection points | 4                  |
| Total number of potentials        | 1                  |
| Number of levels                  | 1                  |
| Type of wiring                    | Front-entry wiring |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 5.2 mm / 0.205 inch  |
| Height from upper-edge of DIN-35 rail | 38.9 mm / 1.531 inch |
| Depth                                 | 51.3 mm / 2.031 inch |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | angled              |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data


|                     |                      |
|---------------------|----------------------|
| Color               | blue                 |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 0.141 MJ             |
| Weight              | 5.86 g               |

## Commercial data

|                    |               |
|--------------------|---------------|
| Product Group      | 22 (TOPJOB S) |
| Country of origin  | CN            |
| GTIN               | 4044918964906 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                            | Additional Approval Text | Certificate name                                                       |
|------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------|------------------------------------------------------------------------|
|  | AEx<br>Underwriters Laboratories Inc.               | UL 60079                 | E185892                                                                |
|  | ATEX<br>Physikalisch Technische Bundesanstalt (PTB) | EN 60079                 | PTB 03<br>ATEX<br>1162 U (II<br>2 G/D Ex e<br>II bzw. I M<br>2 Ex e I) |
|                                                                                    | IECEX                                               | IEC 60079                | IECEX PTB                                                              |



#### Country specific Approvals

| Logo                                                                             | Approval                                     | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|----------------------------------------------|--------------------------|------------------|
|  | <b>CSA</b><br>DEKRA Certification B.V.       | C22.2 No. 158            | 1536069          |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60947                 | 71-<br>107687    |

#### Ship Approvals

| Logo                                                                                | Approval                                                | Additional Approval Text | Certificate name         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------|
|    | <b>ABS</b><br>American Bureau of Shipping               | EN 60947                 | 14-<br>HG1293677-<br>PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | EN 60947                 | 38586/A0 BV              |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2               |

#### UL-Approvals

| Logo                                                                               | Approval                                       | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|------------------------------------------------|--------------------------|------------------|
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |
|  | <b>UR</b><br>DEKRA Certification B.V.          | EN 60947                 | NTR NL<br>7730   |

## Compatible products

### End plate

|                                                                                  |                                                                                           |           |
|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------|
|  | <b>Item no.: 2002-6391</b><br>End and intermediate plate; 0.8 mm thick                    | 2002-6391 |
|  | <b>Item no.: 2002-6392</b><br>End and intermediate plate; 0.8 mm thick                    | 2002-6392 |
|  | <b>Item no.: 209-191</b><br>Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide | 209-191   |

### Carrier rail

|                                                                                    |                                                                                                                                      |         |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm | 210-112 |
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                  | 210-113 |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                   | 210-114 |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm | 210-115 |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                 | 210-118 |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715               | 210-196 |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                     | 210-197 |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                | 210-198 |
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715        | 210-504 |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715      | 210-505 |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715       | 210-506 |

|                                                                                    |                                                                                                                                                                                                           |                      |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715                                                                              | 210-508              |
| <b>tools</b>                                                                       |                                                                                                                                                                                                           |                      |
|    | <b>Item no.: 210-658</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled                                                                                            | 210-658              |
|    | <b>Item no.: 210-720</b><br>Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm                                                                                                   | 210-720              |
| <b>ferrule</b>                                                                     |                                                                                                                                                                                                           |                      |
|     | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                   | 216-241              |
|     | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                  | 216-242              |
|     | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                     | 216-243              |
|     | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                   | 216-244              |
|    | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                   | 216-246              |
|   | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                  | 216-262              |
|   | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                     | 216-263              |
|   | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                   | 216-264              |
|   | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90                                   | 216-266              |
| <b>Protective Warning Marker</b>                                                   |                                                                                                                                                                                                           |                      |
|  | <b>Item no.: 2002-115</b><br>Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks                                                                                            | 2002-115             |
| <b>Jumper</b>                                                                      |                                                                                                                                                                                                           |                      |
|  | <b>Item no.: 2009-412</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks          | 2009-412             |
|  | <b>Item no.: 2009-414</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks         | 2009-414             |
|  | <b>Item no.: 2009-414/000-005</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks | 2009-414<br>/000-005 |



Item no.: 2009-414/000-006

2009-414

Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks



Item no.: 2009-416

2009-416


Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 1.5 mm²; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks



Item no.: 210-103

210-103

Wire commoning chain; insulated; 50 connections



Item no.: 210-123

210-123

Wire commoning chain; insulated; 50 connections

## Insulation stop



Item no.: 2002-171

2002-171

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip



Item no.: 2002-172

2002-172

Insulation stop; 0.75 - 1 mm²; 5 pieces/strip

## Marking accessories



Item no.: 2002-161

2002-161

Adaptor



Item no.: 2009-110

2009-110

Marking strips; on reel; not stretchable; plain; snap-on type



Item no.: 2009-115

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type



Item no.: 2009-115/000-002

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-002



Item no.: 2009-115/000-005

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-005



Item no.: 2009-115/000-006

2009-115

WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-006



Item no.: 2009-115/000-007

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-007



Item no.: 2009-115/000-012

2009-115

WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-012



Item no.: 2009-115/000-017

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-017



Item no.: 2009-115/000-023

2009-115

WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

/000-023

|                                                                                    |                                                                                                                               |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|
|    | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | 2009-115 |
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         | 2009-145 |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | 2009-145 |
|  | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|  | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                             | 2009-191 |
|  | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                             | 2009-192 |
|  | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                             | 2009-193 |
|  | <b>Item no.: 2009-198</b><br>Adaptor                                                                                          | 2009-198 |
|  | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |

**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-006

248-501

**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-007

248-501

**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-012

248-501

**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-017

248-501

**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-023

248-501

**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-024

248-501

**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type

793-501

**Item no.: 793-501/000-002**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-002

793-501

**Item no.: 793-501/000-005**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-005

793-501

**Item no.: 793-501/000-006**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-006

793-501

**Item no.: 793-501/000-007**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-007

793-501

**Item no.: 793-501/000-012**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-012

793-501

**Item no.: 793-501/000-017**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-017

793-501

**Item no.: 793-501/000-023**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-023

793-501

**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type

/000-024

793-501

**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

793-5501

**Item no.: 793-5501/000-002**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

/000-002

793-5501

**Item no.: 793-5501/000-005**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-005

793-5501

**Item no.: 793-5501/000-006**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-006

793-5501

**Item no.: 793-5501/000-007**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-007

793-5501

**Item no.: 793-5501/000-012**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-012

793-5501

**Item no.: 793-5501/000-014**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-014

793-5501

**Item no.: 793-5501/000-017**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-017

793-5501

**Item no.: 793-5501/000-023**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-023

793-5501

**Item no.: 793-5501/000-024**

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-024

793-5501

**check****Item no.: 2002-611**

TOPJOB®S L-type test plug module; modular; 1-pole

2002-611

**Item no.: 2002-649**

TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks

2002-649

**Item no.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks

2009-174

**Item no.: 2009-182**Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm

2009-182

**Downloads****Documentation****Bid Text**



|                        |                 |          |
|------------------------|-----------------|----------|
| 2002-6404              | docx<br>15.4 kB | Download |
| Additional Information |                 |          |
|                        | pdf<br>2.1 MB   | Download |
| CAD/CAE - Smart Data   |                 |          |
| CAD data               |                 |          |
| 3D Download 2002-6404  | URL             | Download |

Subject to changes.