



## Data sheet | Item number: 2004-1302

3-conductor through terminal block; 4 mm<sup>2</sup>; suitable for Ex e II applications;  
side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE  
CLAMP®

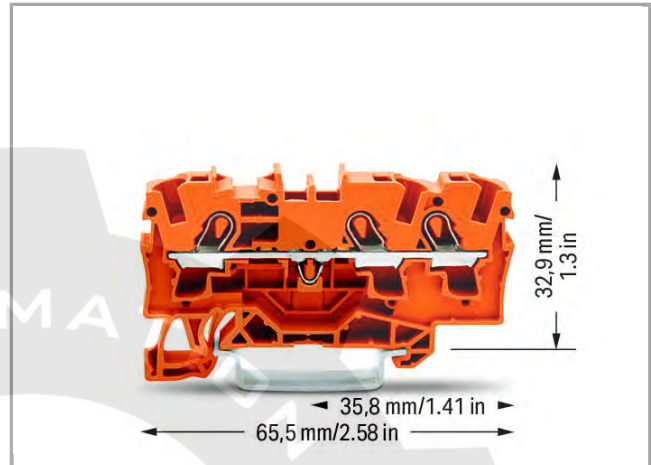


2004-1302

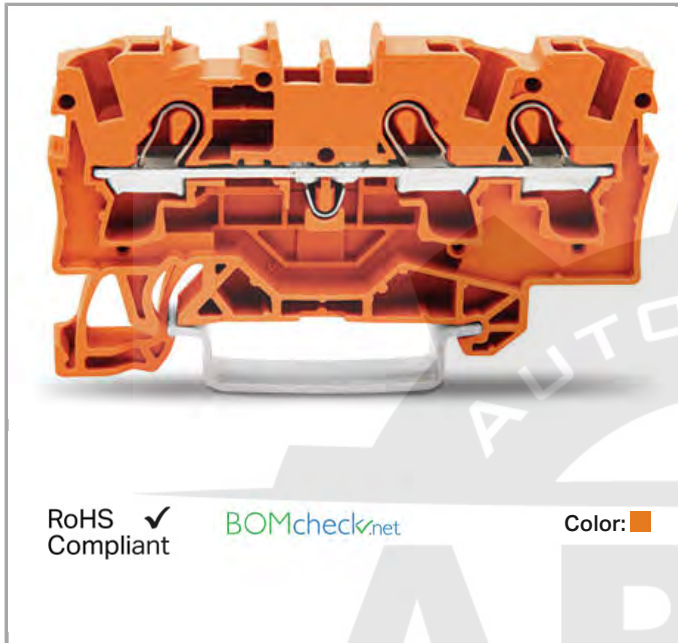

RoHS  
Compliant

BOMcheck.net

Color: ■

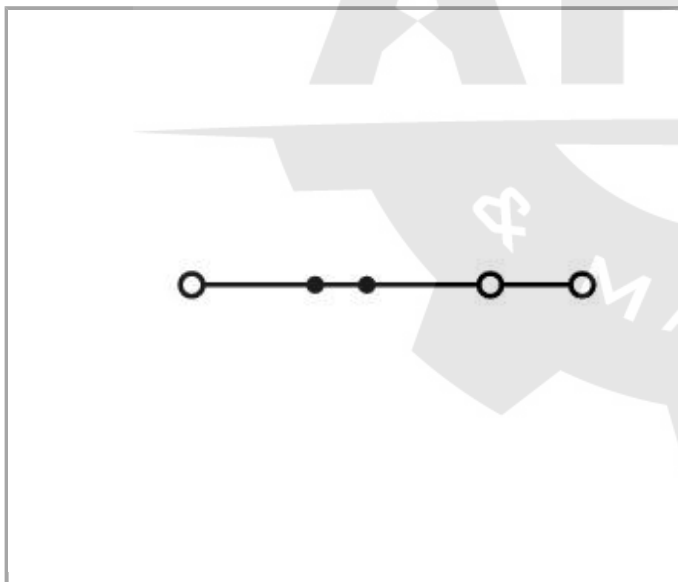

### Data

#### Electrical data

|                            |       |
|----------------------------|-------|
| Rated voltage EN (Ex e II) | 550 V |
| Rated current (Ex e II)    | 30 A  |

## Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 800 V |
| Rated impulse voltage (III / 3) | 8 kV  |
| Rated current                   | 32 A  |
| Rated current (2)               | 41 A  |

## Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 600 V |
| Rated current UL (Use Group B) | 30 A  |
| Rated voltage UL (Use Group C) | 600 V |
| Rated current UL (Use Group C) | 30 A  |

## Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 600 V |
| Rated current CSA (Use Group B) | 30 A  |
| Rated voltage CSA (Use Group C) | 600 V |
| Rated current CSA (Use Group C) | 30 A  |

## Connection data

|                                      |                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                       | Push-in<br>Open Tool Slot                                                                                                         |
| Connectable conductor materials      | Copper                                                                                                                            |
| Nominal cross section                | 4 mm²                                                                                                                             |
| Solid conductor                      | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Solid conductor, push-in termination | 1.5 ... 6 mm² / 14 ... 10 AWG                                                                                                     |
| Fine-stranded conductor              | 0.5 ... 6 mm² / 20 ... 10 AWG                                                                                                     |
| Strip length                         | 11 ... 13 mm / 0.43 ... 0.51 inch                                                                                                 |
| Note (conductor cross-section)       | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |
| Total number of connection points    | 3                                                                                                                                 |
| Total number of potentials           | 1                                                                                                                                 |
| Number of levels                     | 1                                                                                                                                 |
| Type of wiring                       | Front-entry wiring                                                                                                                |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 6.2 mm / 0.244 inch  |
| Height from upper-edge of DIN-35 rail | 32.9 mm / 1.295 inch |
| Depth                                 | 65.5 mm / 2.579 inch |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | horizontal          |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | orange               |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 0.15 MJ              |
| Weight              | 8.37 g               |

## Commercial data

|                    |               |
|--------------------|---------------|
| Product Group      | 22 (TOPJOB S) |
| Country of origin  | DE            |
| GTIN               | 4017332071536 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                            | Additional Approval Text | Certificate name                                                   |
|------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------|--------------------------------------------------------------------|
|  | AEx<br>Underwriters Laboratories Inc.               | EN 60079                 | E185892                                                            |
|  | ATEX<br>Physikalisch Technische Bundesanstalt (PTB) | EN 60079                 | PTB 05<br>ATEX<br>1095 U (II<br>2 G/D Ex<br>eII bzw.I<br>M2 Ex eI) |

### Country specific Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2160584.10       |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-<br>7088  |



CSA  
DEKRA Certification B.V.

C22.2 No. 158

1645435

#### Ship Approvals

| Logo                                                                              | Approval                                  | Additional Approval Text | Certificate name         |
|-----------------------------------------------------------------------------------|-------------------------------------------|--------------------------|--------------------------|
|   | <b>ABS</b><br>American Bureau of Shipping | -                        | 14-<br>HG1293677-<br>PDA |
|  | <b>BV</b><br>Bureau Veritas S.A.          | EN 60947                 | 38586/A0<br>BV           |
|  | <b>LR</b><br>Lloyds Register              | EN 60947                 | 91/20112<br>(E9)         |

#### UL-Approvals

| Logo                                                                               | Approval                                   | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>UL International Germany GmbH | UL 1059                  | E45172           |

#### Compatible products

#### End plate

|                                                                                    |                                                                      |           |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------|
|  | <b>Item no.: 2004-1391</b><br>End and intermediate plate; 1 mm thick | 2004-1391 |
|  | <b>Item no.: 2004-1392</b><br>End and intermediate plate; 1 mm thick | 2004-1392 |
|  | <b>Item no.: 2004-1393</b><br>Separator plate; 2 mm thick; oversized | 2004-1393 |



**Item no.: 2004-1394**  
Separator plate; 2 mm thick; oversized

2004-1394



**Item no.: 209-191**  
Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide

209-191

## Jumper



**Item no.: 2004-402**  
Push-in type jumper bar; insulated; 2-way; Nominal current 32 A

2004-402



**Item no.: 2004-403**  
Push-in type jumper bar; insulated; 3-way; Nominal current 32 A

2004-403



**Item no.: 2004-404**  
Push-in type jumper bar; insulated; 4-way; Nominal current 32 A

2004-404



**Item no.: 2004-405**  
Push-in type jumper bar; insulated; 5-way; Nominal current 32 A

2004-405



**Item no.: 2004-405/011-000**  
Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block

2004-405

/011-000



**Item no.: 2004-406**  
Push-in type jumper bar; insulated; 6-way; Nominal current 32 A

2004-406



**Item no.: 2004-406/020-000**  
Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block

2004-406

/020-000



**Item no.: 2004-407**  
Push-in type jumper bar; insulated; 7-way; Nominal current 32 A

2004-407



**Item no.: 2004-408**  
Push-in type jumper bar; insulated; 8-way; Nominal current 32 A

2004-408



**Item no.: 2004-409**  
Push-in type jumper bar; insulated; 9-way; Nominal current 32 A

2004-409



**Item no.: 2004-410**  
Push-in type jumper bar; insulated; 10-way; Nominal current 32 A

2004-410



**Item no.: 2004-433**  
Push-in type jumper bar; insulated; from 1 to 3; Nominal current 32 A

2004-433



**Item no.: 2004-434**  
Push-in type jumper bar; insulated; from 1 to 4; Nominal current 32 A

2004-434



**Item no.: 2004-435**  
Push-in type jumper bar; insulated; from 1 to 5; Nominal current 32 A

2004-435



**Item no.: 2004-436**  
Push-in type jumper bar; insulated; from 1 to 6; Nominal current 32 A

2004-436



**Item no.: 2004-437**  
Push-in type jumper bar; insulated; from 1 to 7; Nominal current 32 A

2004-437



**Item no.: 2004-438**  
Push-in type jumper bar; insulated; from 1 to 8; Nominal current 32 A

2004-438

**Item no.: 2004-439**

Push-in type jumper bar; insulated; from 1 to 9; Nominal current 32 A

2004-439

**Item no.: 2004-440**

Push-in type jumper bar; insulated; from 1 to 10; Nominal current 32 A

2004-440

**Item no.: 2006-499**Step-down jumper; insulated; from 6/4 mm<sup>2</sup> to 4/2.5/1.5 mm<sup>2</sup>; Nominal current 32 A

2006-499

**Item no.: 2016-499**Step-down jumper; insulated; from 16/10 mm<sup>2</sup> to 10/6/4/2.5 mm<sup>2</sup>; Nominal current 57 A

2016-499

**Item no.: 210-103**

Wire commoning chain; insulated; 50 connections

210-103

**Item no.: 210-123**

Wire commoning chain; insulated; 50 connections

210-123

**Carrier rail****Item no.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

210-112

**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

210-113

**Item no.: 210-114**


Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

210-114

**Item no.: 210-115**


Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

210-115

**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-118

**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715

210-196

**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

210-197

**Item no.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

210-198

**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

210-504

**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

210-505

**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

210-506

**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

210-508

**Marking accessories****Item no.: 2009-110**

Marking strips; on reel; not stretchable; plain; snap-on type

2009-110

|                                                                                     |                                                                                                                               |          |          |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type              |          | 2009-115 |
|    | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-002 | 2009-115 |
|    | <b>Item no.: 2009-115/000-005</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-005 | 2009-115 |
|    | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-006 | 2009-115 |
|    | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-007 | 2009-115 |
|    | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-012 | 2009-115 |
|    | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-017 | 2009-115 |
|  | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type      | /000-023 | 2009-115 |
|  | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type       | /000-024 | 2009-115 |
|   | <b>Item no.: 2009-135</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type              |          | 2009-135 |
|   | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         |          | 2009-145 |
|   | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-002 | 2009-145 |
|   | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-005 | 2009-145 |
|   | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-006 | 2009-145 |
|   | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-007 | 2009-145 |



|                                                                                    |                                                                                                                               |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|                                                                                    | /000-012                                                                                                                      |          |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | 2009-145 |
|                                                                                    | /000-023                                                                                                                      |          |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145 |
|                                                                                    | /000-024                                                                                                                      |          |
|    | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                             | 2009-191 |
|    | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                             | 2009-192 |
|    | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                             | 2009-193 |
|    | <b>Item no.: 2009-198</b><br>Adaptor                                                                                          | 2009-198 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-002                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-005                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-006                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-007                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-012                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-017                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-023                                                                                                                      |          |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | 248-501  |
|                                                                                    | /000-024                                                                                                                      |          |



|                                                                                    |                                                                                                                                                   |                      |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                                       | 793-501              |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-002  |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-005  |
|    | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-006  |
|    | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-007  |
|    | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-012  |
|    | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-017  |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-023  |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                                               | 793-501<br>/000-024  |
|  | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type         | 793-5501             |
|  | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type | 793-5501<br>/000-002 |
|  | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type                                       | 793-5501<br>/000-005 |
|  | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type                                       | 793-5501<br>/000-006 |
|  | <b>Item no.: 793-5501/000-007</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type                                       | 793-5501<br>/000-007 |
|  | <b>Item no.: 793-5501/000-012</b><br>WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type                                       | 793-5501<br>/000-012 |



**Item no.: 793-5501/000-014**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-014

793-5501



**Item no.: 793-5501/000-017**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-017

793-5501



**Item no.: 793-5501/000-023**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-023

793-5501



**Item no.: 793-5501/000-024**  
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

/000-024

793-5501

## check



**Item no.: 2004-511**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole

2004-511



**Item no.: 2004-549**  
Spacer module; modular; e.g., for bridging commoned terminal blocks

2004-549



**Item no.: 2004-552**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole

2004-552



**Item no.: 2004-553**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole

2004-553



**Item no.: 2004-554**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole

2004-554



**Item no.: 2004-555**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole

2004-555



**Item no.: 2009-174**  
Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks

2009-174



**Item no.: 2009-182**  
Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm

2009-182

## Protective Warning Marker



**Item no.: 2004-115**  
Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks

2004-115

## tools



**Item no.: 210-658**  
Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled

210-658



**Item no.: 210-720**  
Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720

## Insulation stop



**Item no.: 2004-171**  
Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip

2004-171



**Item no.: 2004-172**  
Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip

2004-172

## ferrule

|                                                                                 |                                                                                                                                                                                      |         |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|  | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264 |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-266 |
|  | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-267 |

## Downloads

## Documentation

## Bid Text

|                                      |             |                 |          |
|--------------------------------------|-------------|-----------------|----------|
| 2004-1302<br>Reihenklemmen, TOPJOB S | Apr 4, 2012 | docx<br>15.1 kB | Download |
|--------------------------------------|-------------|-----------------|----------|

## Additional Information

|  |  |               |          |
|--|--|---------------|----------|
|  |  | pdf<br>2.1 MB | Download |
|--|--|---------------|----------|

## CAD/CAE - Smart Data

## CAD data

|                       |     |          |
|-----------------------|-----|----------|
| 3D Download 2004-1302 | URL | Download |
|-----------------------|-----|----------|

Subject to changes.