
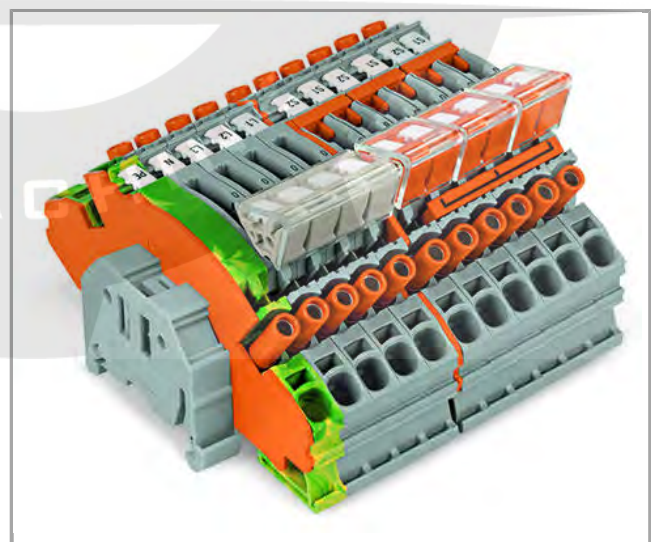
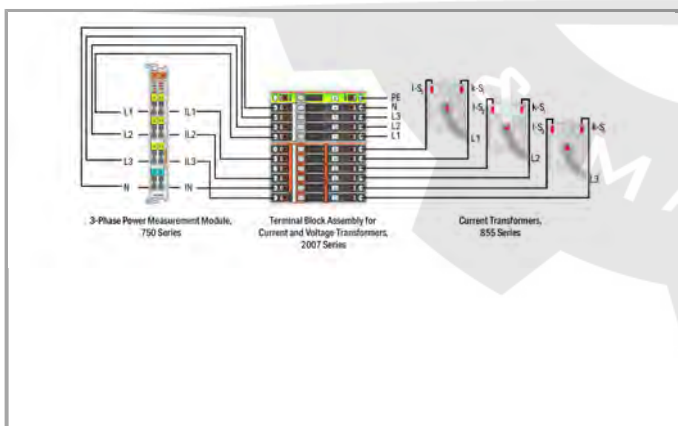


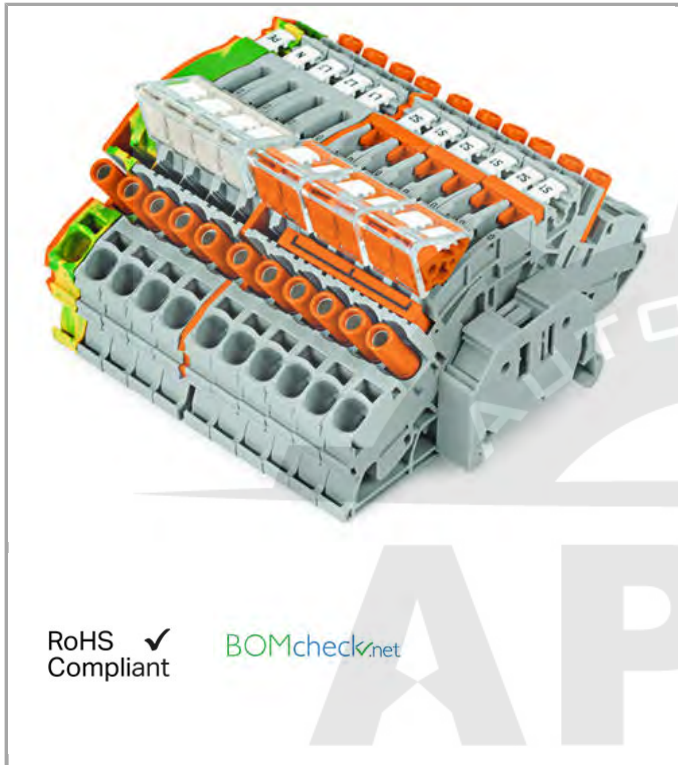

Data  
Electrical data

## Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 500 V |
| Rated impulse voltage (III / 3) | 6 kV  |

## Connection data

|                                                             |                                   |
|-------------------------------------------------------------|-----------------------------------|
| Connection technology                                       | Push-in CAGE CLAMP®               |
| Actuation type                                              | Push-in<br>Open Tool Slot         |
| Connectable conductor materials                             | Copper                            |
| Nominal cross section                                       | 6 mm²                             |
| Solid conductor                                             | 0.5 ... 10 mm² / 20 ... 8 AWG     |
| Solid conductor, push-in termination                        | 1 ... 10 mm² / 14 ... 8 AWG       |
| Fine-stranded conductor                                     | 0.5 ... 10 mm² / 20 ... 8 AWG     |
| Fine-stranded conductor with ferrule without plastic collar | 1.5 ... 6 mm² / 16 ... 10 AWG     |
| Strip length                                                | 13 ... 15 mm / 0.51 ... 0.59 inch |
| Number of levels                                            | 1                                 |
| Type of wiring                                              | Front-entry wiring                |

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 112 mm / 4.409 inch  |
| Height from upper-edge of DIN-35 rail | 65.3 mm / 2.571 inch |
| Depth                                 | 99.6 mm / 3.921 inch |
| Module width                          | 8 mm / 0.315 inch    |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | angled              |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data

|                     |                      |
|---------------------|----------------------|
| Color               | multicoloured        |
| Insulating material | Polyamide 66 (PA 66) |
| Fire load           | 5.527 MJ             |
| Weight              | 347.501 g            |

## Commercial data

|                   |               |
|-------------------|---------------|
| Product Group     | 22 (TOPJOB S) |
| Country of origin | DE            |

|                    |               |
|--------------------|---------------|
| GTIN               | 4050821776697 |
| Customs Tariff No. | 85369010000   |

## Compatible products

|                                                                                    |                                                                                                                                                                                      |                      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| <b>ferrule</b>                                                                     |                                                                                                                                                                                      |                      |
|    | <b>Item no.: 216-208</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-208              |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262              |
|    | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263              |
|    | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264              |
|  | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-266              |
|  | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-267              |
| <b>tools</b>                                                                       |                                                                                                                                                                                      |                      |
|  | <b>Item no.: 210-721</b><br>Operating tool with partially insulated shaft; Type 3, blade (5.5 x 0.8) mm                                                                              | 210-721              |
| <b>Marking accessories</b>                                                         |                                                                                                                                                                                      |                      |
|  | <b>Item no.: 2009-110</b><br>Marking strips; on reel; not stretchable; plain; snap-on type                                                                                           | 2009-110             |
|  | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type                                                                     | 2009-115             |
|  | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type                                                             | 2009-115<br>/000-002 |
|  | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type                                                              | 2009-115<br>/000-006 |
|  | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type                                                             | 2009-115<br>/000-007 |

|                                                                                    |                                                                                                                          |          |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------|
|   | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | 2009-115 |
|                                                                                    | /000-012                                                                                                                 |          |
|   | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-115 |
|                                                                                    | /000-017                                                                                                                 |          |
|   | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-115 |
|                                                                                    | /000-023                                                                                                                 |          |
|   | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | 2009-115 |
|                                                                                    | /000-024                                                                                                                 |          |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                              | 793-501  |
|    | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-002                                                                                                                 |          |
|    | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-005                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-006                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-007                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-012                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-017                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-023                                                                                                                 |          |
|  | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type                      | 793-501  |
|                                                                                    | /000-024                                                                                                                 |          |

#### Protective Warning Marker

|                                                                                    |                                                                                                                |          |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------|
|  | <b>Item no.: 2006-115</b><br>Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks | 2006-115 |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------|

#### Carrier rail

|                                                                                    |                                                                                                                                      |         |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm | 210-112 |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------|

|                                                                                  |                                                                                                                                      |         |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                  | 210-113 |
|  | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                   | 210-114 |
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm | 210-115 |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                 | 210-118 |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715               | 210-196 |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                     | 210-197 |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                | 210-198 |

## Downloads

## Documentation

## Bid Text

2007-8873

docx  
17.8 kB

Download

## Additional Information

pdf  
2.1 MB

Download

Subject to changes.