


## Data sheet | Item number: 2110-1201

TOPJOB®S feedthrough terminal block with Lever and Open Tool Slot; rail mount; 2-conductor; 10 mm wide; gray

[www.wago.com/2110-1201](http://www.wago.com/2110-1201)

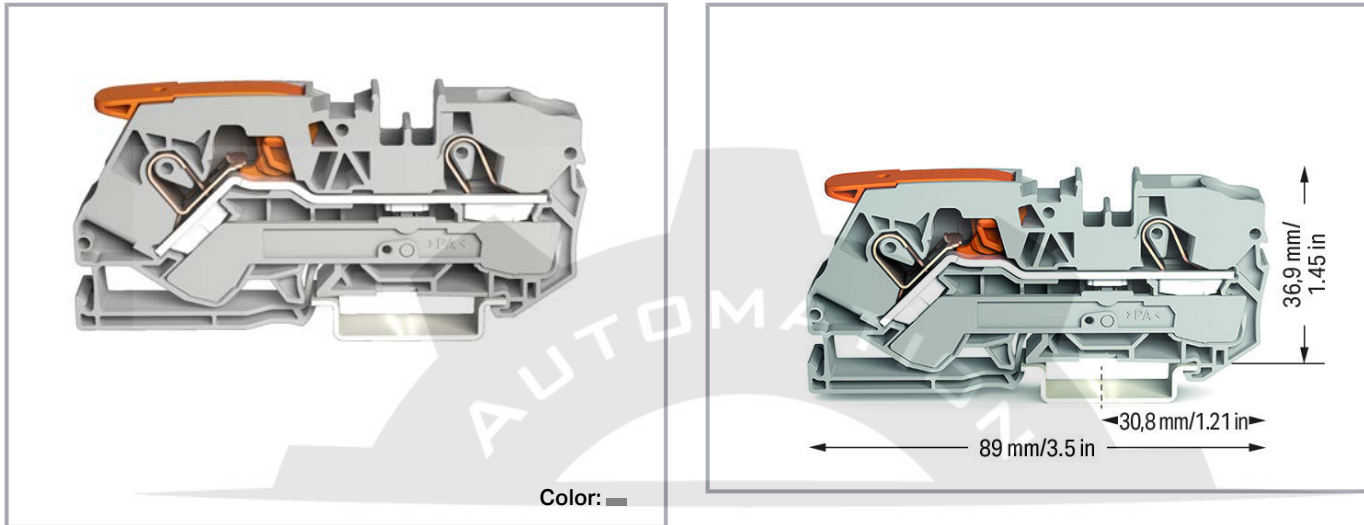

### Data

#### Electrical data

#### IEC Approvals

|                             |                                                                      |
|-----------------------------|----------------------------------------------------------------------|
| Ratings per                 | IEC/EN 60947-7-1                                                     |
| Rated voltage (III / 3)     | 800 V                                                                |
| Rated surge voltage (III/3) | 8 kV                                                                 |
| Rated current               | 57 A                                                                 |
| Rated current 2             | 74 A                                                                 |
| Legend (ratings)            | (III / 3) $\triangleq$ Overvoltage category III / Pollution degree 3 |

#### UL Approvals

|                                |         |
|--------------------------------|---------|
| Approvals per                  | UL 1059 |
| Rated voltage UL (Use Group B) | 600 V   |
| Rated current UL (Use Group B) | 65 A    |
| Rated voltage UL (Use Group C) | 600 V   |
| Rated current UL (Use Group C) | 65 A    |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



## CSA Approvals

|                                 |              |
|---------------------------------|--------------|
| Approvals per                   | C22.2 No 158 |
| Rated voltage CSA (Use Group B) | 600 V        |
| Rated current CSA (Use Group B) | 65 A         |
| Rated voltage CSA (Use Group C) | 600 V        |
| Rated current CSA (Use Group C) | 65 A         |

## Ex information

|                                     |                                                               |
|-------------------------------------|---------------------------------------------------------------|
| Ratings per                         | ATEX: PTB 19 ATEX 1017 U / IECEx: PTB 19.0047U (Ex eb IIC Gb) |
| Rated voltage EN (Ex e II)          | 550 V                                                         |
| Rated current (Ex e II)             | 57 A                                                          |
| Rated current (Ex e II) with jumper | 50 A                                                          |

## Connection data

|                                                            |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                                      | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                                             | Lever and Open Tool Slot                                                                                                          |
| Connectable conductor materials                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 10 mm²                                                                                                                            |
| Solid conductor                                            | 0.5 ... 16 mm² / 20 ... 6 AWG                                                                                                     |
| Solid conductor; push-in termination                       | 4 ... 16 mm² / 14 ... 6 AWG                                                                                                       |
| Fine-stranded conductor                                    | 0.5 ... 16 mm² / 20 ... 6 AWG                                                                                                     |
| Fine-stranded conductor; with insulated ferrule            | 0.5 ... 10 mm² / 20 ... 8 AWG                                                                                                     |
| Fine-stranded conductor; with ferrule; push-in termination | 4 ... 10 mm² / 12 ... 8 AWG                                                                                                       |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 17 ... 19 mm / 0.67 ... 0.75 inch                                                                                                 |
| Total number of connection points                          | 2                                                                                                                                 |
| Total number of potentials                                 | 1                                                                                                                                 |
| Number of levels                                           | 1                                                                                                                                 |
| Wiring direction                                           | Front-entry wiring                                                                                                                |
| Number of jumper slots                                     | 2                                                                                                                                 |

## Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 10 mm / 0.394 inch   |
| Height                            | 89 mm / 3.504 inch   |
| Depth from upper edge of DIN-rail | 36.9 mm / 1.453 inch |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



## Mechanical data

|               |                     |
|---------------|---------------------|
| Design        | horizontal type     |
| Mounting type | DIN-35 rail         |
| Marking level | Center/side marking |

## Material data

|                             |                  |
|-----------------------------|------------------|
| Color                       | gray             |
| Insulation material         | Polyamide (PA66) |
| Flammability class per UL94 | V0               |
| Weight                      | 25.5 g           |

## Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging type        | BOX           |
| Country of origin     | PL            |
| GTIN                  | 4055143865180 |
| Customs tariff number | 8536904000    |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                                       | Additional Approval Text | Certificate name                                    |
|------------------------------------------------------------------------------------|------------------------------------------------|--------------------------|-----------------------------------------------------|
|  | ATEX<br>Physikalisch Technische Bundesanstalt  | EN 60079-0               | PTB 19 ATEX 1017<br>U (II 2 G Ex eb IIC Gb)         |
|  | CCCEX<br>CQST/CNEX                             | CNCA-C23-01              | 2020312313000165                                    |
|  | IECEX<br>Physikalisch Technische Bundesanstalt | IEC 60079                | IECEX PTB 19.0047<br>U (Ex eb IIC Gb or Ex eb I Mb) |

### Country specific Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7757      |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



**KEMA/KEUR**  
DEKRA Certification B.V.

EN 60947

71-  
109053

#### UL-Approvals

| Logo                                                                             | Approval                                       | Additional Approval Text | Certificate name    |
|----------------------------------------------------------------------------------|------------------------------------------------|--------------------------|---------------------|
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 60079                 | E185892             |
|  | <b>UL</b><br>Underwriters Laboratories Inc.    | UL 1059                  | E45172-<br>20191120 |

#### Required accessories

##### End plates

|                                                                                   |                                                                              |                                                                    |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------|
|   | <b>Item no.: 2110-1291</b><br>End and intermediate plate; 1 mm thick; gray   | <a href="http://www.wago.com/2110-1291">www.wago.com/2110-1291</a> |
|  | <b>Item no.: 2110-1292</b><br>End and intermediate plate; 1 mm thick; orange | <a href="http://www.wago.com/2110-1292">www.wago.com/2110-1292</a> |

#### Optional accessories

##### Testing accessories

|                                                                                    |                                                                                                                           |                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|   | <b>Item no.: 2009-174</b><br>TOPJOB®S test plug adapter; for test plug 4 mm Ø; for testing TOPJOB®S terminal blocks; gray | <a href="http://www.wago.com/2009-174">www.wago.com/2009-174</a> |
|   | <b>Item no.: 2009-182</b><br>TOPJOB®S testing tap; tool-free; 12 AWG max; for testing TOPJOB®S terminal blocks; gray      | <a href="http://www.wago.com/2009-182">www.wago.com/2009-182</a> |
|  | <b>Item no.: 2010-511</b><br>TOPJOB®S modular connector; for 2010 series; for jumper contact slot; 1-pole; gray           | <a href="http://www.wago.com/2010-511">www.wago.com/2010-511</a> |
|  | <b>Item no.: 2010-549</b><br>TOPJOB®S spacer module; for 2010-511; 10 mm wide; gray                                       | <a href="http://www.wago.com/2010-549">www.wago.com/2010-549</a> |
|   | <b>Item no.: 210-136</b><br>Test plug; 2 mm Ø; with 500 mm cable                                                          | <a href="http://www.wago.com/210-136">www.wago.com/210-136</a>   |

##### Carrier rail

**Item no.: 210-113**

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                   |                                                                                                                                                   |                                                                                  |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                                           | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>                   |
|    | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>                   |
|    | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored              | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>                   |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored            | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>                   |
|    | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>                   |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored             | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>                   |
| <b>Marking accessories</b>                                                        |                                                                                                                                                   |                                                                                  |
|    | <b>Item no.: 2009-110</b><br>Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white                              | <a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>                 |
|    | <b>Item no.: 2009-115</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
|    | <b>Item no.: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | <a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a> |
|  | <b>Item no.: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a> |
|  | <b>Item no.: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a> |
|  | <b>Item no.: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a> |
|  | <b>Item no.: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a> |
|  | <b>Item no.: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |
|  | <b>Item no.: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|                                                                                   | <b>Item no.: 2009-145</b>                                                                                                                         |                                                                                  |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                                                                                   |                                                                                                                                                                              |                                                                                  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a> |                                                                                  |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow                            | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red                               | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue                              | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray                              | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange                            | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green                             | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet                            | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Item no.: 2009-191</b><br>Group marker carrier                                                                                                                            | <a href="http://www.wago.com/2009-191">www.wago.com/2009-191</a>                 |
|  | <b>Item no.: 2009-192</b><br>Group marker carrier                                                                                                                            | <a href="http://www.wago.com/2009-192">www.wago.com/2009-192</a>                 |
|  | <b>Item no.: 2009-193</b><br>Group marker carrier                                                                                                                            | <a href="http://www.wago.com/2009-193">www.wago.com/2009-193</a>                 |
|  | <b>Item no.: 2009-198</b><br>Adaptor; gray                                                                                                                                   | <a href="http://www.wago.com/2009-198">www.wago.com/2009-198</a>                 |
|  | <b>Item no.: 248-501</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                                                                      | <a href="http://www.wago.com/248-501">www.wago.com/248-501</a>                   |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                                             | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red                                                                | <a href="http://www.wago.com/248-501/000-005">www.wago.com/248-501/000-005</a>   |

Subject to changes. Please also observe the further product documentation!



|                                                                                   |                                                                                                                       |                                                                                |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue        | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a> |
|    | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray        | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a> |
|    | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange      | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a> |
|    | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green | <a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a> |
|    | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green       | <a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a> |
|    | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet      | <a href="http://www.wago.com/248-501/000-024">www.wago.com/248-501/000-024</a> |
|    | <b>Item no.: 793-501</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; white                    | <a href="http://www.wago.com/793-501">www.wago.com/793-501</a>                 |
|  | <b>Item no.: 793-501/000-002</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; yellow           | <a href="http://www.wago.com/793-501/000-002">www.wago.com/793-501/000-002</a> |
|  | <b>Item no.: 793-501/000-005</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; red              | <a href="http://www.wago.com/793-501/000-005">www.wago.com/793-501/000-005</a> |
|  | <b>Item no.: 793-501/000-006</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; blue             | <a href="http://www.wago.com/793-501/000-006">www.wago.com/793-501/000-006</a> |
|  | <b>Item no.: 793-501/000-007</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; gray             | <a href="http://www.wago.com/793-501/000-007">www.wago.com/793-501/000-007</a> |
|  | <b>Item no.: 793-501/000-012</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; orange           | <a href="http://www.wago.com/793-501/000-012">www.wago.com/793-501/000-012</a> |
|  | <b>Item no.: 793-501/000-017</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; light green      | <a href="http://www.wago.com/793-501/000-017">www.wago.com/793-501/000-017</a> |
|  | <b>Item no.: 793-501/000-023</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; green            | <a href="http://www.wago.com/793-501/000-023">www.wago.com/793-501/000-023</a> |

Subject to changes. Please also observe the further product documentation!



|                                                                                   |                                                                                                                                                                |                                                                                  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 793-501/000-024</b><br>WMB marking card; as card; not stretchable; plain; snap-on type; violet                                                    | <a href="http://www.wago.com/793-501/000-024">www.wago.com/793-501/000-024</a>   |
|    | <b>Item no.: 793-5501</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/793-5501">www.wago.com/793-5501</a>                 |
|    | <b>Item no.: 793-5501/000-002</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | <a href="http://www.wago.com/793-5501/000-002">www.wago.com/793-5501/000-002</a> |
|    | <b>Item no.: 793-5501/000-005</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red         | <a href="http://www.wago.com/793-5501/000-005">www.wago.com/793-5501/000-005</a> |
|    | <b>Item no.: 793-5501/000-006</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/793-5501/000-006">www.wago.com/793-5501/000-006</a> |
|    | <b>Item no.: 793-5501/000-007</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/793-5501/000-007">www.wago.com/793-5501/000-007</a> |
|    | <b>Item no.: 793-5501/000-012</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/793-5501/000-012">www.wago.com/793-5501/000-012</a> |
|  | <b>Item no.: 793-5501/000-017</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/793-5501/000-017">www.wago.com/793-5501/000-017</a> |
|  | <b>Item no.: 793-5501/000-023</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/793-5501/000-023">www.wago.com/793-5501/000-023</a> |
|  | <b>Item no.: 793-5501/000-024</b><br>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/793-5501/000-024">www.wago.com/793-5501/000-024</a> |

**Tools**

|                                                                                    |                                                                                                                  |                                                                |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | <b>Item no.: 210-721</b><br>Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured | <a href="http://www.wago.com/210-721">www.wago.com/210-721</a> |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|

**Jumpers**

|                                                                                    |                                                                                             |                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------|
|  | <b>Item no.: 2010-402</b><br>TOPJOB®S jumper; for 2010 series; insulated; 2-way; light-gray | <a href="http://www.wago.com/2010-402">www.wago.com/2010-402</a> |
|  | <b>Item no.: 2010-403</b><br>TOPJOB®S jumper; for 2010 series; insulated; 3-way; light-gray | <a href="http://www.wago.com/2010-403">www.wago.com/2010-403</a> |
|  | <b>Item no.: 2010-404</b><br>TOPJOB®S jumper; for 2010 series; insulated; 4-way; light-gray | <a href="http://www.wago.com/2010-404">www.wago.com/2010-404</a> |

Subject to changes. Please also observe the further product documentation!



|                                                                                   |                                                                                                                                                                                            |                                                                                  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2010-405</b><br>TOPJOB®S jumper; for 2010 series; insulated; 5-way; light-gray                                                                                                | <a href="http://www.wago.com/2010-405">www.wago.com/2010-405</a>                 |
|    | <b>Item no.: 2010-405/011-000</b><br>TOPJOB®S jumper; Wye configuration; for 2010 series; insulated; 3-way (1-3-5); light-gray                                                             | <a href="http://www.wago.com/2010-405/011-000">www.wago.com/2010-405/011-000</a> |
|   | <b>Item no.: 2010-433</b><br>TOPJOB®S jumper; for 2010 series; insulated; 2-way (1-3); light-gray                                                                                          | <a href="http://www.wago.com/2010-433">www.wago.com/2010-433</a>                 |
|   | <b>Item no.: 2010-434</b><br>TOPJOB®S jumper; for 2010 series; insulated; 2-way (1-4); light-gray                                                                                          | <a href="http://www.wago.com/2010-434">www.wago.com/2010-434</a>                 |
|   | <b>Item no.: 2010-435</b><br>TOPJOB®S jumper; for 2010 series; insulated; 2-way (1-5); light-gray                                                                                          | <a href="http://www.wago.com/2010-435">www.wago.com/2010-435</a>                 |
| <b>Protective warning marker</b>                                                  |                                                                                                                                                                                            |                                                                                  |
|    | <b>Item no.: 2010-115</b><br>TOPJOB®S protective warning marker; with high-voltage symbol, for 2010 series terminal blocks; for 5 terminal blocks                                          | <a href="http://www.wago.com/2010-115">www.wago.com/2010-115</a>                 |
| <b>Ferrules</b>                                                                   |                                                                                                                                                                                            |                                                                                  |
|    | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-284">www.wago.com/216-284</a>                   |
|   | <b>Item no.: 216-286</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-286">www.wago.com/216-286</a>                   |
|  | <b>Item no.: 216-287</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray    | <a href="http://www.wago.com/216-287">www.wago.com/216-287</a>                   |
|  | <b>Item no.: 216-288</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow  | <a href="http://www.wago.com/216-288">www.wago.com/216-288</a>                   |
|  | <b>Item no.: 216-289</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-289">www.wago.com/216-289</a>                   |
| <b>Cover</b>                                                                      |                                                                                                                                                                                            |                                                                                  |
|  | <b>Item no.: 2010-100</b><br>TOPJOB®S finger guard; touchproof cover protects unused conductor entry slots; for 2010 series terminal blocks                                                | <a href="http://www.wago.com/2010-100">www.wago.com/2010-100</a>                 |

## Downloads

### Documentation

#### Bid Text

|              |              |         |          |
|--------------|--------------|---------|----------|
| 2110-1201    | May 20, 2019 | docx    | Download |
| docx - Datei |              | 15.3 kB |          |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|             |              |        |          |
|-------------|--------------|--------|----------|
| 2110-1201   | May 20, 2019 | xml    | Download |
| X81 - Datei |              | 4.1 kB |          |

**Additional Information**

|                        |             |        |          |
|------------------------|-------------|--------|----------|
| Technical explanations | Apr 3, 2019 | pdf    | Download |
|                        |             | 2.2 MB |          |

**CAD files****CAD data**

|                        |     |          |
|------------------------|-----|----------|
| 2D/3D Models 2110-1201 | URL | Download |
|------------------------|-----|----------|

**CAE data**

|                             |     |          |
|-----------------------------|-----|----------|
| EPLAN Data Portal 2110-1201 | URL | Download |
|-----------------------------|-----|----------|

|                        |     |          |
|------------------------|-----|----------|
| ZUKEN Portal 2110-1201 | URL | Download |
|------------------------|-----|----------|

**Environmental Product Compliance****Compliance Search**

|                                            |     |          |
|--------------------------------------------|-----|----------|
| Environmental Product Compliance 2110-1201 | URL | Download |
|--------------------------------------------|-----|----------|


2-conductor through terminal block; with lever and Push-in CAGE CLAMP®; 10 mm²; with test port; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 10,00 mm²; gray

**Installation Notes****Conductor termination**


Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)


Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

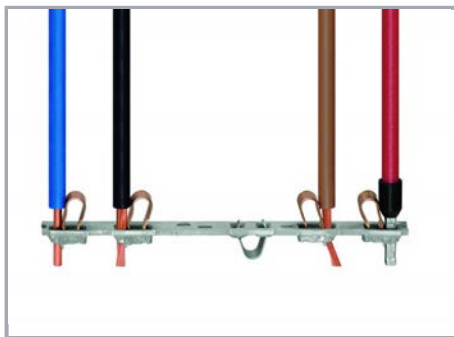


All conductor types at a glance

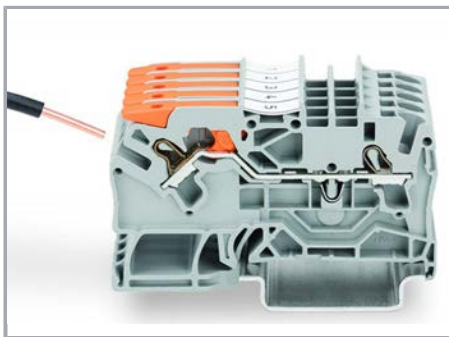


Push-in termination of solid conductors

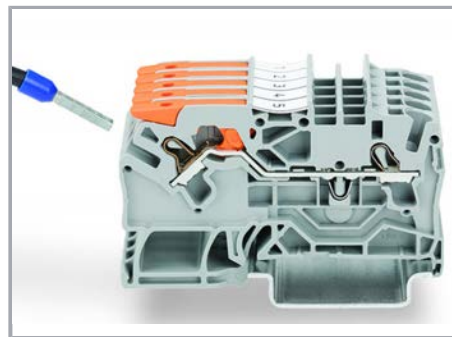


Push-in termination of fine-stranded conductors with ferrules

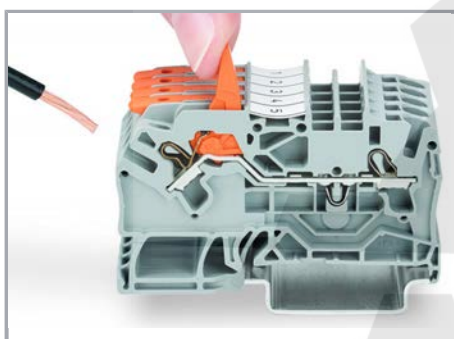

Pull the lever up until it stops, then connect the fine-stranded conductor.

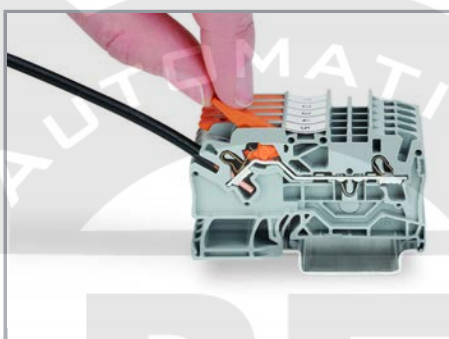


Push the lever back down – done!

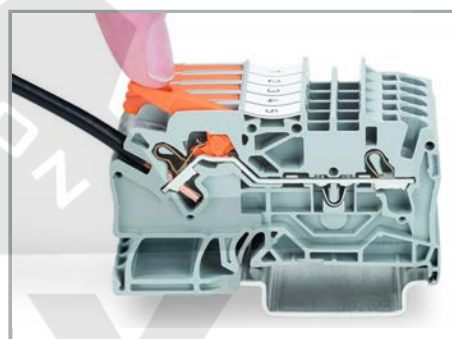


Push the lever back down – done!

#### Commoning

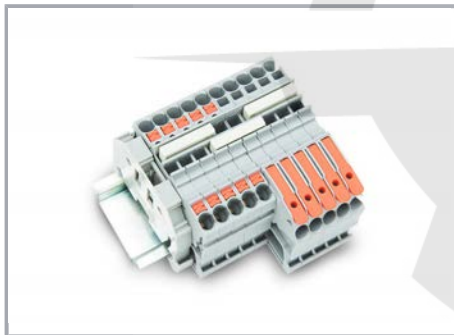

Insert a push-in type jumper bar and push down until it hits the backstop.

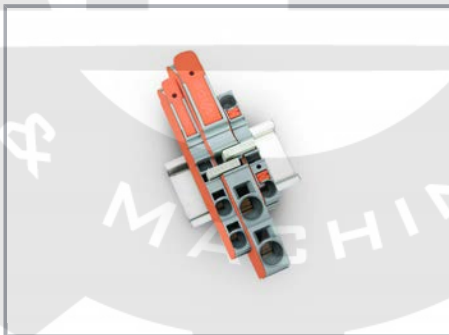


Commoning with step-down jumpers.

#### Testing

Subject to changes. Please also observe the further product documentation!


WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

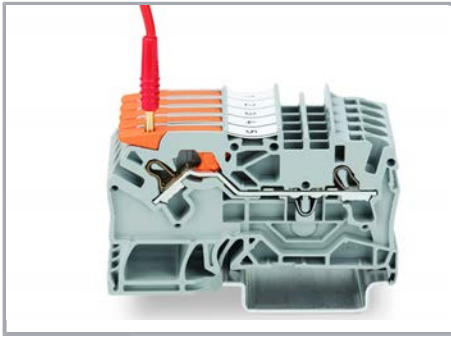

Testing with a 2 mm Ø test plug (max. 42 V).

### Marking

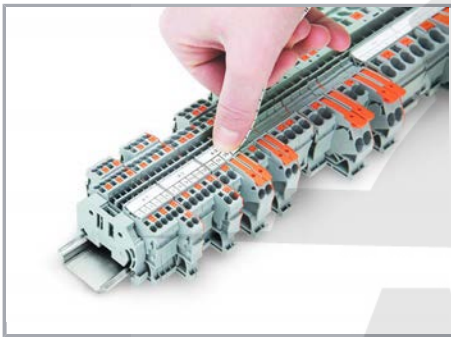

Snapping a marking strip into a marker slot.



Snapping a marking strip into the marker slot.

### Product family

#### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.