


Data Sheet | Item Number: 221-2522

Mounting carrier; 2-way; for inline splicing connector with lever; for screw mounting;
gray

<https://www.wago.com/221-2522>

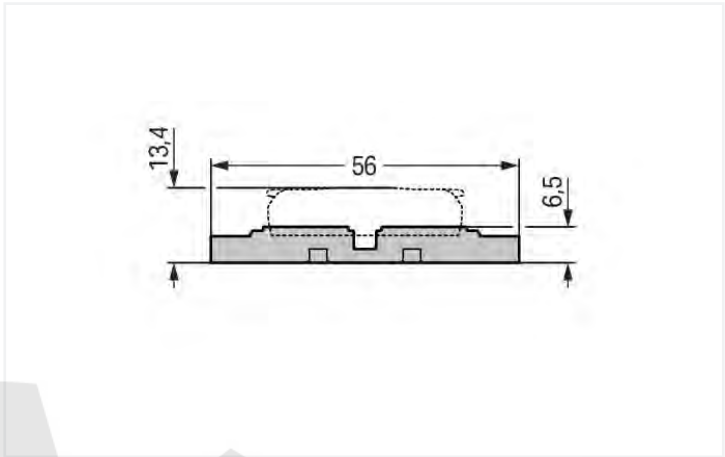

Color:  gray

Physical data	
Width	20.8 mm / 0.819 inches
Height from the surface	6.5 mm / 0.256 inches
Depth	56 mm / 2.205 inches
Material Data	
Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	0 MJ
Weight	3 g
Commercial data	
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	25 (5) pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966119930
Customs tariff number	39269097900

Downloads
Environmental Product Compliance
Compliance Search
Environmental Product Compliance 221-2522

Documentation
Additional Information
Technical Section
pdf 2142.18 KB

CAD/CAE-Data
CAD data
2D/3D Models 221-2522
CAE data
EPLAN Data Portal 221-2522
ZUKEN Portal 221-2522

1 Compatible Products
1.1 Optional Accessories
1.1.1 Installation
1.1.1.1 Mounting accessories
 Item No.: 209-119 Fixing screw; for 209-120 mounting carrier
 Item No.: 209-123 Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray
 Item No.: 209-120 Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

1.1.2 Marking
1.1.2.1 Marking strip
 Item No.: 210-834 Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

Installation Notes

Installation



Place the inline splicing connector on the carrier in front of the mounting position.



Push the connector to the center position until it snaps into place.



Mounting carrier without strain relief – snapped onto DIN-rail



Various combinations of 1- to 5-connector mounting carriers are possible via side-by-side latching mechanism.

Strain relief



3-pole mounting carrier with strain relief