


Data sheet | Item number: 221-2532

Mounting carrier; 2-way; for inline splicing connector with lever; with snap-in mounting foot; gray

<https://www.wago.com/221-2532>

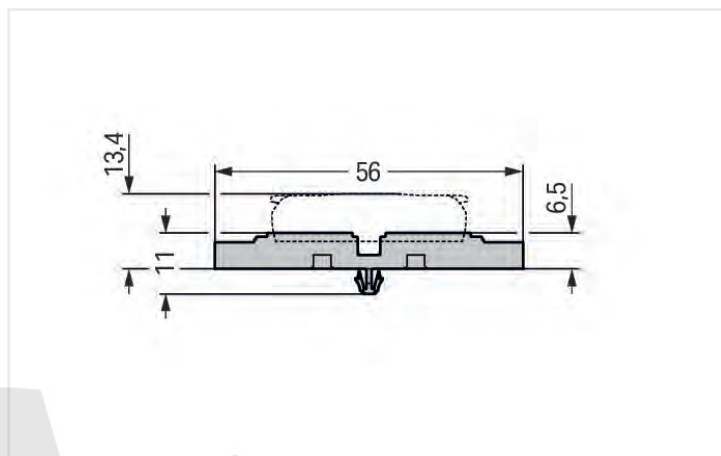

Color:  gray

Physical data

Width	20.8 mm / 0.819 inches
Height from the surface	6.5 mm / 0.256 inches
Depth	56 mm / 2.205 inches

Material Data

Note (material data)

[Information on material specifications can be found here](#)

Color	gray
Fire load	0.096 MJ
Weight	3.2 g

Commercial data

ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	25 (5) pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966119985
Customs tariff number	39269097900

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 221-2532	

Documentation	
Additional Information	
Technical Section	pdf 2142.18 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 221-2532	EPLAN Data Portal 221-2532
	ZUKEN Portal 221-2532

1 Compatible products	
1.1 Optional accessories	
1.1.1 Installation	
1.1.1.1 Mounting accessories	
 Item no.: 209-119 Fixing screw; for 209-120 mounting carrier	 Item no.: 209-123 Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray
	 Item no.: 209-120 Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray

1.1.2 Marking	
1.1.2.1 Marking strip	
	Item no.: 210-334 Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white

Installation notes

Installation



Place the inline splicing connector on the carrier in front of the mounting position.



Push the connector to the center position until it snaps into place.



Mounting carrier without strain relief – snapped onto DIN-rail



Various combinations of 1- to 5-connector mounting carriers are possible via side-by-side latching mechanism.

Strain relief



3-pole mounting carrier with strain relief