
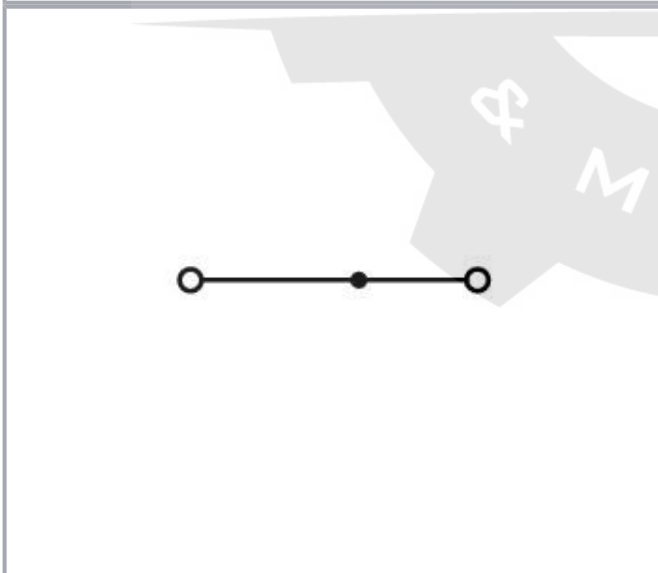
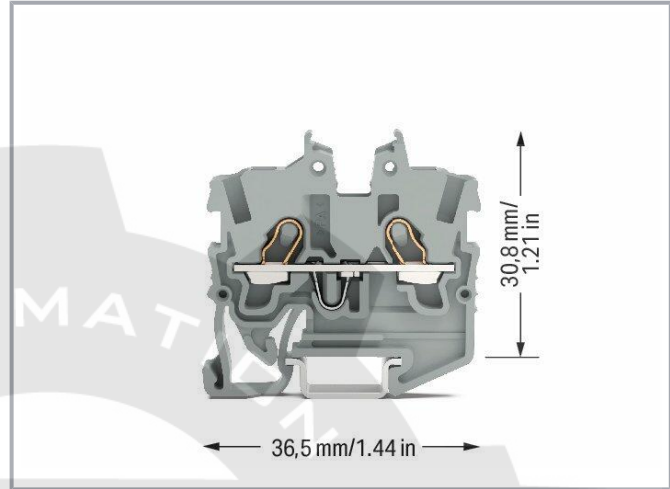


**Data sheet | Item number: 2250-1201**

TOPJOB®S miniature feedthrough terminal block with Push-buttons; DIN-15 rail mount; 2-conductor; 3.5 mm wide; gray

[www.wago.com/2250-1201](http://www.wago.com/2250-1201)

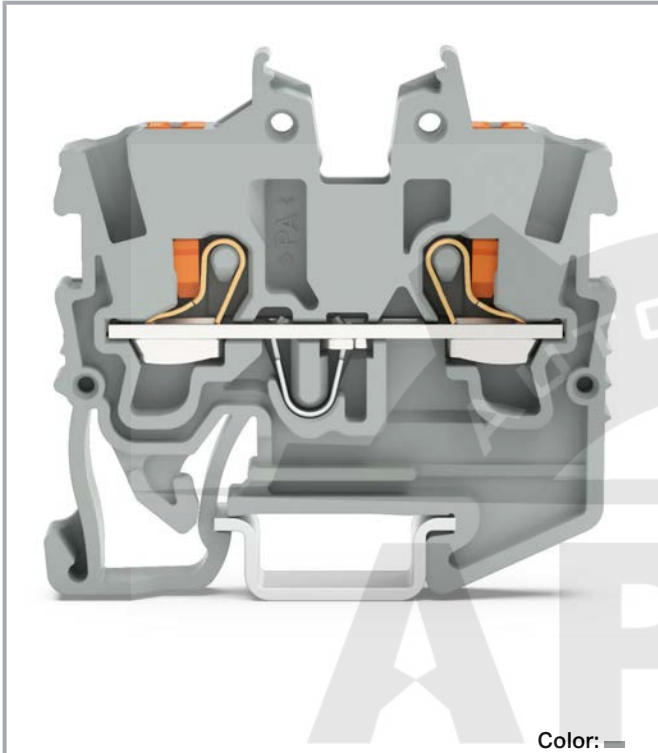

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

## Data

### Electrical data

### IEC Approvals

|                             |                                                                      |
|-----------------------------|----------------------------------------------------------------------|
| Ratings per                 | IEC/EN 60947-7-1                                                     |
| Rated voltage (III / 3)     | 500 V                                                                |
| Rated surge voltage (III/3) | 6 kV                                                                 |
| Rated current               | 13.5 A                                                               |
| Rated current 2             | 17.5 A                                                               |
| Legend (ratings)            | (III / 3) $\triangleq$ Overvoltage category III / Pollution degree 3 |

### UL Approvals

|                                |         |
|--------------------------------|---------|
| Approvals per                  | UL 1059 |
| Rated voltage UL (Use Group B) | 300 V   |
| Rated current UL (Use Group B) | 10 A    |
| Rated voltage UL (Use Group C) | 300 V   |
| Rated current UL (Use Group C) | 10 A    |

### CSA Approvals

|                                 |              |
|---------------------------------|--------------|
| Approvals per                   | C22.2 No 158 |
| Rated voltage CSA (Use Group B) | 300 V        |
| Rated current CSA (Use Group B) | 10 A         |
| Rated voltage CSA (Use Group C) | 300 V        |
| Rated current CSA (Use Group C) | 10 A         |

### Ex information

|                                     |        |
|-------------------------------------|--------|
| Rated voltage EN (Ex e II)          | 352 V  |
| Rated current (Ex e II)             | 13.5 A |
| Rated current (Ex e II) with jumper | 12 A   |

### Connection data

|                                 |                                          |
|---------------------------------|------------------------------------------|
| Connection technology           | Push-in CAGE CLAMP®                      |
| Actuation type                  | Push-in<br>Push-button<br>Open Tool Slot |
| Connectable conductor materials | Copper                                   |

Subject to changes. Please also observe the further product documentation!



|                                                            |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
|                                                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 1 mm <sup>2</sup>                                                                                                                 |
| Solid conductor                                            | 0.14 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG                                                                                      |
| Solid conductor; push-in termination                       | 0.5 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG                                                                                       |
| Fine-stranded conductor                                    | 0.14 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG                                                                                      |
| Fine-stranded conductor; with insulated ferrule            | 0.14 ... 0.75 mm <sup>2</sup> / 24 ... 18 AWG                                                                                     |
| Fine-stranded conductor; with ferrule; push-in termination | 0.5 ... 0.75 mm <sup>2</sup> / 20 ... 18 AWG                                                                                      |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 9 ... 11 mm / 0.35 ... 0.43 inch                                                                                                  |
| Total number of connection points                          | 2                                                                                                                                 |
| Total number of potentials                                 | 1                                                                                                                                 |
| Number of levels                                           | 1                                                                                                                                 |
| Wiring direction                                           | Front-entry wiring                                                                                                                |
| Number of jumper slots                                     | 1                                                                                                                                 |

### Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 3.5 mm / 0.138 inch  |
| Height                            | 34.1 mm / 1.343 inch |
| Depth from upper edge of DIN-rail | 27.9 mm / 1.098 inch |

### Mechanical data

|               |                     |
|---------------|---------------------|
| Design        | horizontal type     |
| Mounting type | DIN-15 rail         |
| Marking level | Center/side marking |

### Material data

|                             |                  |
|-----------------------------|------------------|
| Color                       | gray             |
| Insulation material         | Polyamide (PA66) |
| Flammability class per UL94 | V0               |
| Fire load                   | 0.046 MJ         |
| Weight                      | 2.5 g            |

### Commercial data

|                   |               |
|-------------------|---------------|
| Packaging type    | BOX           |
| Country of origin | DE            |
| GTIN              | 4055143965200 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

Customs tariff number 8536904000

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                             | Approval                                              | Additional Approval Text | Certificate name                                                  |
|----------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------|-------------------------------------------------------------------|
|  | <b>AEx</b><br>Underwriters Laboratories Inc.          | UL 60079                 | E185892                                                           |
|  | <b>ATEX</b><br>Physikalisch Technische Bundesanstalt  | EN IEC 60079-0           | PTB 19 ATEX 1019<br>U (II 2G Ex eb IIC Gb<br>or I M 2 EX eb I Mb) |
|  | <b>CCCEx</b><br>CQST/CNEx                             | CNCA-C23-01              | 2020312313000289                                                  |
|  | <b>IECEX</b><br>Physikalisch Technische Bundesanstalt | IEC 60079                | IECEX PTB 19.0050<br>U (Ex eb IIC Gb or<br>EX eb I Mb)            |

### Country specific Approvals

| Logo                                                                               | Approval                                     | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|----------------------------------------------|--------------------------|------------------|
|  | <b>CCA</b><br>DEKRA Certification B.V.       | EN 60998                 | NTR NL<br>7840   |
|  | <b>CCA</b><br>DEKRA Certification B.V.       | EN 60947                 | NTR NL<br>7839   |
|  | <b>CSA</b><br>CSA                            | C22.2 No. 158            | 80034182         |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60947                 | 71-<br>113930    |
|                                                                                    | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60998                 | 71-<br>113957    |

Subject to changes. Please also observe the further product documentation!



## UL-Approvals

| Logo                                                                             | Approval                                | Additional Approval Text | Certificate name    |
|----------------------------------------------------------------------------------|-----------------------------------------|--------------------------|---------------------|
|  | cURus<br>Underwriters Laboratories Inc. | UL 1059                  | E45172-<br>20200212 |

## Required accessories

## End plates

|                                                                                 |                                                                       |                                                                    |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|
|  | Item no.: 2050-1291<br>End and intermediate plate; 1.1 mm thick; gray | <a href="http://www.wago.com/2050-1291">www.wago.com/2050-1291</a> |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|

## Optional accessories

## Mounting

|                                                                                    |                                                                           |                                                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 249-101<br>Screwless end stop; 6 mm wide; for WMB markers; gray | <a href="http://www.wago.com/249-101">www.wago.com/249-101</a> |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------|

## Ferrules

|                                                                                   |                                                                                                                                                                                     |                                                                |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 216-241<br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|  | Item no.: 216-242<br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|  | Item no.: 216-243<br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |

## Carrier rail

|                                                                                   |                                                                                                                               |                                                                |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 210-111<br>Steel carrier rail; 15 x 5.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; silver-colored    | <a href="http://www.wago.com/210-111">www.wago.com/210-111</a> |
|  | Item no.: 210-295<br>Steel carrier rail; 15 x 5.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored  | <a href="http://www.wago.com/210-295">www.wago.com/210-295</a> |
|  | Item no.: 210-296<br>Aluminum carrier rail; 15 x 5.5 mm; 1 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-296">www.wago.com/210-296</a> |

## Tools

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

**Item no.: 210-647**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-647](http://www.wago.com/210-647)**Item no.: 210-648**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short

[www.wago.com/210-648](http://www.wago.com/210-648)**Item no.: 210-719**

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

[www.wago.com/210-719](http://www.wago.com/210-719)**Marking accessories****Item no.: 2009-113**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white

[www.wago.com/2009-113](http://www.wago.com/2009-113)**Item no.: 2009-113/000-002**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; yellow

[www.wago.com/2009-113/000-002](http://www.wago.com/2009-113/000-002)**Item no.: 2009-113/000-005**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; red

[www.wago.com/2009-113/000-005](http://www.wago.com/2009-113/000-005)**Item no.: 2009-113/000-006**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; blue

[www.wago.com/2009-113/000-006](http://www.wago.com/2009-113/000-006)**Item no.: 2009-113/000-007**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; gray

[www.wago.com/2009-113/000-007](http://www.wago.com/2009-113/000-007)**Item no.: 2009-113/000-012**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; orange

[www.wago.com/2009-113/000-012](http://www.wago.com/2009-113/000-012)**Item no.: 2009-113/000-017**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; light green

[www.wago.com/2009-113/000-017](http://www.wago.com/2009-113/000-017)**Item no.: 2009-113/000-023**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; green

[www.wago.com/2009-113/000-023](http://www.wago.com/2009-113/000-023)**Item no.: 2009-113/000-024**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; violet

[www.wago.com/2009-113/000-024](http://www.wago.com/2009-113/000-024)**Item no.: 2009-191**

Group marker carrier

[www.wago.com/2009-191](http://www.wago.com/2009-191)**Item no.: 793-3501**

WMB marking card; as card; plain; snap-on type; white

[www.wago.com/793-3501](http://www.wago.com/793-3501)**Testing accessories****Item no.: 2009-174**

Subject to changes. Please also observe the further product documentation!



TOPJOB®S test plug adapter; for test plug 4 mm Ø; for testing TOPJOB®S terminal blocks; gray

[www.wago.com/2009-174](http://www.wago.com/2009-174)**Item no.: 2009-182**

TOPJOB®S testing tap; tool-free; 12 AWG max; for testing TOPJOB®S terminal blocks; gray

[www.wago.com/2009-182](http://www.wago.com/2009-182)**Item no.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable

[www.wago.com/210-136](http://www.wago.com/210-136)**Item no.: 210-137**

Test plug; 2.3 mm Ø; with 500 mm cable

[www.wago.com/210-137](http://www.wago.com/210-137)**Push-in type wire jumper****Item no.: 2009-402**TOPJOB®S wire jumper; insulated; 60 mm long; conductor cross section 0.75 mm<sup>2</sup>; suitable for 2000 and 2020 series terminal blocks; gray[www.wago.com/2009-402](http://www.wago.com/2009-402)**Item no.: 2009-404**TOPJOB®S wire jumper; insulated; 110 mm long; conductor cross section 0.75 mm<sup>2</sup>; suitable for 2000 and 2020 series terminal blocks; gray[www.wago.com/2009-404](http://www.wago.com/2009-404)**Item no.: 2009-406**TOPJOB®S wire jumper; insulated; 250 mm long; conductor cross section 0.75 mm<sup>2</sup>; suitable for 2000 and 2020 series terminal blocks; gray[www.wago.com/2009-406](http://www.wago.com/2009-406)**Jumpers****Item no.: 2000-402**

TOPJOB®S jumper; for 2000 series; insulated; 2-way; light-gray

[www.wago.com/2000-402](http://www.wago.com/2000-402)**Item no.: 2000-402/000-005**

TOPJOB®S jumper; for 2000 series; insulated; 2-way; red

[www.wago.com/2000-402/000-005](http://www.wago.com/2000-402/000-005)**Item no.: 2000-402/000-006**

TOPJOB®S jumper; for 2000 series; insulated; 2-way; blue

[www.wago.com/2000-402/000-006](http://www.wago.com/2000-402/000-006)**Item no.: 2000-402/000-018**

TOPJOB®S jumper; for 2000 series; insulated; 2-way; green-yellow

[www.wago.com/2000-402/000-018](http://www.wago.com/2000-402/000-018)**Item no.: 2000-403**

TOPJOB®S jumper; for 2000 series; insulated; 3-way; light-gray

[www.wago.com/2000-403](http://www.wago.com/2000-403)**Item no.: 2000-403/000-005**

TOPJOB®S jumper; for 2000 series; insulated; 3-way; red

[www.wago.com/2000-403/000-005](http://www.wago.com/2000-403/000-005)**Item no.: 2000-403/000-006**

TOPJOB®S jumper; for 2000 series; insulated; 3-way; blue

[www.wago.com/2000-403/000-006](http://www.wago.com/2000-403/000-006)**Item no.: 2000-404**

TOPJOB®S jumper; for 2000 series; insulated; 4-way; light-gray

[www.wago.com/2000-404](http://www.wago.com/2000-404)

Subject to changes. Please also observe the further product documentation!



**Item no.: 2000-404/000-005**  
TOPJOB®S jumper; for 2000 series; insulated; 4-way; red

[www.wago.com/2000-404/000-005](http://www.wago.com/2000-404/000-005)



**Item no.: 2000-404/000-006**  
TOPJOB®S jumper; for 2000 series; insulated; 4-way; blue

[www.wago.com/2000-404/000-006](http://www.wago.com/2000-404/000-006)



**Item no.: 2000-405**  
TOPJOB®S jumper; for 2000 series; insulated; 5-way; light-gray

[www.wago.com/2000-405](http://www.wago.com/2000-405)



**Item no.: 2000-405/000-005**  
TOPJOB®S jumper; for 2000 series; insulated; 5-way; red

[www.wago.com/2000-405/000-005](http://www.wago.com/2000-405/000-005)



**Item no.: 2000-405/000-006**  
TOPJOB®S jumper; for 2000 series; insulated; 5-way; blue

[www.wago.com/2000-405/000-006](http://www.wago.com/2000-405/000-006)



**Item no.: 2000-405/011-000**  
TOPJOB®S jumper; Wye configuration; for 2000 series; insulated; 3-way (1-3-5); light-gray

[www.wago.com/2000-405/011-000](http://www.wago.com/2000-405/011-000)



**Item no.: 2000-406**  
TOPJOB®S jumper; for 2000 series; insulated; 6-way; light-gray

[www.wago.com/2000-406](http://www.wago.com/2000-406)



**Item no.: 2000-406/000-005**  
TOPJOB®S jumper; for 2000 series; insulated; 6-way; red

[www.wago.com/2000-406/000-005](http://www.wago.com/2000-406/000-005)



**Item no.: 2000-406/000-006**  
TOPJOB®S jumper; for 2000 series; insulated; 6-way; blue

[www.wago.com/2000-406/000-006](http://www.wago.com/2000-406/000-006)



**Item no.: 2000-406/020-000**  
TOPJOB®S jumper; Delta configuration; for 2000 series; insulated; 6-way (1-2, 3-4, 5-6); light-gray

[www.wago.com/2000-406/020-000](http://www.wago.com/2000-406/020-000)



**Item no.: 2000-407**  
TOPJOB®S jumper; for 2000 series; insulated; 7-way; light-gray

[www.wago.com/2000-407](http://www.wago.com/2000-407)



**Item no.: 2000-407/000-005**  
TOPJOB®S jumper; for 2000 series; insulated; 7-way; red

[www.wago.com/2000-407/000-005](http://www.wago.com/2000-407/000-005)



**Item no.: 2000-407/000-006**  
TOPJOB®S jumper; for 2000 series; insulated; 7-way; blue

[www.wago.com/2000-407/000-006](http://www.wago.com/2000-407/000-006)



**Item no.: 2000-408**  
TOPJOB®S jumper; for 2000 series; insulated; 8-way; light-gray

[www.wago.com/2000-408](http://www.wago.com/2000-408)



**Item no.: 2000-408/000-005**  
TOPJOB®S jumper; for 2000 series; insulated; 8-way; red

[www.wago.com/2000-408/000-005](http://www.wago.com/2000-408/000-005)

Subject to changes. Please also observe the further product documentation!

|                                                                                    |                                                                                                     |                                                                                  |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|     | <b>Item no.: 2000-408/000-006</b><br>TOPJOB®S jumper; for 2000 series; insulated; 8-way; blue       | <a href="http://www.wago.com/2000-408/000-006">www.wago.com/2000-408/000-006</a> |
|    | <b>Item no.: 2000-409</b><br>TOPJOB®S jumper; for 2000 series; insulated; 9-way; light-gray         | <a href="http://www.wago.com/2000-409">www.wago.com/2000-409</a>                 |
|     | <b>Item no.: 2000-409/000-005</b><br>TOPJOB®S jumper; for 2000 series; insulated; 9-way; red        | <a href="http://www.wago.com/2000-409/000-005">www.wago.com/2000-409/000-005</a> |
|     | <b>Item no.: 2000-409/000-006</b><br>TOPJOB®S jumper; for 2000 series; insulated; 9-way; blue       | <a href="http://www.wago.com/2000-409/000-006">www.wago.com/2000-409/000-006</a> |
|    | <b>Item no.: 2000-410</b><br>TOPJOB®S jumper; for 2000 series; insulated; 10-way; light-gray        | <a href="http://www.wago.com/2000-410">www.wago.com/2000-410</a>                 |
|     | <b>Item no.: 2000-410/000-005</b><br>TOPJOB®S jumper; for 2000 series; insulated; 10-way; red       | <a href="http://www.wago.com/2000-410/000-005">www.wago.com/2000-410/000-005</a> |
|     | <b>Item no.: 2000-410/000-006</b><br>TOPJOB®S jumper; for 2000 series; insulated; 10-way; blue      | <a href="http://www.wago.com/2000-410/000-006">www.wago.com/2000-410/000-006</a> |
|  | <b>Item no.: 2000-433</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-3); light-gray   | <a href="http://www.wago.com/2000-433">www.wago.com/2000-433</a>                 |
|  | <b>Item no.: 2000-433/000-005</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-3); red  | <a href="http://www.wago.com/2000-433/000-005">www.wago.com/2000-433/000-005</a> |
|  | <b>Item no.: 2000-433/000-006</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-3); blue | <a href="http://www.wago.com/2000-433/000-006">www.wago.com/2000-433/000-006</a> |
|  | <b>Item no.: 2000-434</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-4); light-gray   | <a href="http://www.wago.com/2000-434">www.wago.com/2000-434</a>                 |
|  | <b>Item no.: 2000-435</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-5); light-gray   | <a href="http://www.wago.com/2000-435">www.wago.com/2000-435</a>                 |
|  | <b>Item no.: 2000-436</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-6); light-gray   | <a href="http://www.wago.com/2000-436">www.wago.com/2000-436</a>                 |
|  | <b>Item no.: 2000-437</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-7); light-gray   | <a href="http://www.wago.com/2000-437">www.wago.com/2000-437</a>                 |
|  | <b>Item no.: 2000-438</b><br>TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-8); light-gray   | <a href="http://www.wago.com/2000-438">www.wago.com/2000-438</a>                 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
 Germantown, WI 53022  
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
 Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

**Item no.: 2000-439**

TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-9); light-gray

[www.wago.com/2000-439](http://www.wago.com/2000-439)**Item no.: 2000-440**

TOPJOB®S jumper; for 2000 series; insulated; 2-way (1-10); light-gray

[www.wago.com/2000-440](http://www.wago.com/2000-440)**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)**Item no.: 210-103**

Wire commoning chain; insulated; black

[www.wago.com/210-103](http://www.wago.com/210-103)**Item no.: 210-123**

Wire commoning chain; insulated; blue

[www.wago.com/210-123](http://www.wago.com/210-123)**Downloads****Documentation****Additional Information**

Technical explanations

Apr 3, 2019

pdf  
2.2 MB[Download](#)**CAD files****CAD data**

2D/3D Models 2250-1201

[URL](#)[Download](#)**CAE data**

EPLAN Data Portal 2250-1201

[URL](#)[Download](#)[URL](#)[Download](#)

ZUKEN Portal 2250-1201

[URL](#)[Download](#)**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 2250-1201

[URL](#)[Download](#)2-conductor miniature through terminal block; with push-button; 1 mm<sup>2</sup>; with test port; side and center marking; for DIN-15 rail; Push-in CAGE CLAMP®; 1,00 mm<sup>2</sup>; gray

Subject to changes. Please also observe the further product documentation!

WAGO Corporation

Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?

We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

## Installation Notes



### Conductor termination



Insert solid conductors via push-in termination.



Insert ferruled conductors via push-in termination.



Insert fine-stranded conductors via operating tool.



Remove all conductors via operating tool.

### Commoning

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Insert a jumper (delta jumper) and push down until it hits the backstop (picture shows terminal blocks with push-buttons).



Marking strip (2009-110) inserted in the marking slot with jumper symbols of the inserted jumper (picture shows terminal blocks with push-buttons)



Insert a jumper (star point jumper) and push down until it hits the backstop (picture shows terminal blocks with push-buttons).



Marking strip (2009-110) inserted in the marking slot with jumper symbols of the inserted jumper (2000-405/011-000 Delta Jumper) (picture shows terminal blocks with push-buttons)

#### Testing



Testing with a 2 mm Ø 210-136 Test Plug (max. 42 V).

#### Marking

Subject to changes. Please also observe the further product documentation!



Snapping a WMB marking strip into a marker slot.



Snapping a marking strip (2009-110) into a marker slot.

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.