

**Data sheet | Item number: 231-705/008-000**

1-conductor female plug; Snap-in mounting feet; 2.5 mm<sup>2</sup>; Pin spacing 7.62 mm; 5-pole




231-705/008-000




RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

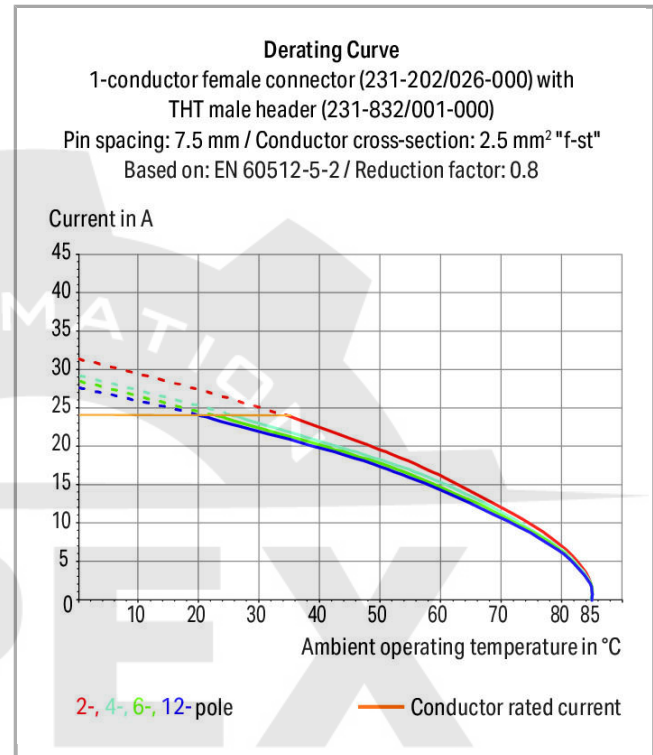

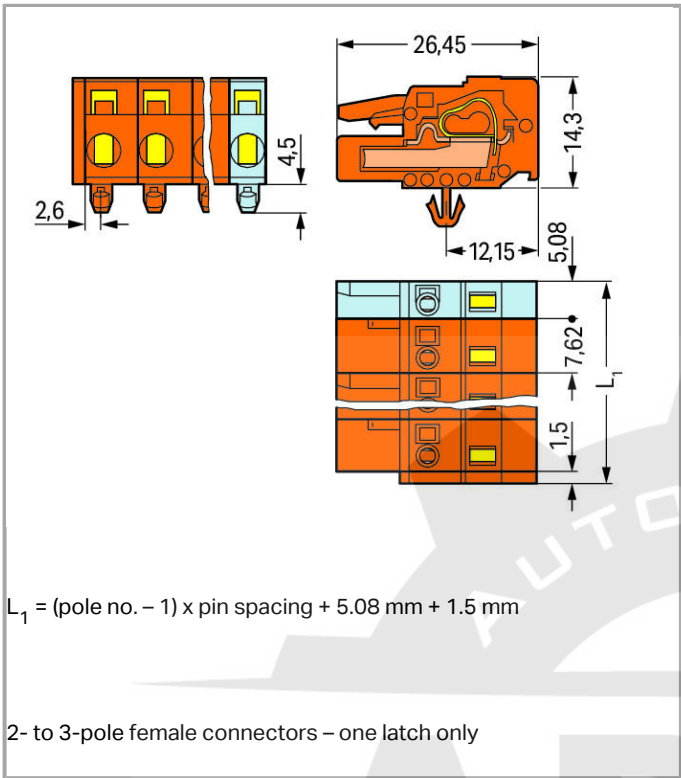

Item description

- Universal connection for all conductor types
- Easy cable pre-assembly and on-unit wiring via vertical and horizontal CAGE CLAMP® actuation
- Integrated test ports
- With coding fingers

Safety information 1:

The *MULTI CONNECTION SYSTEM (MCS)* is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, MCS Connectors shall not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Data

Electrical data

Ratings per IEC/EN 60664-1

|                                 |        |
|---------------------------------|--------|
| Rated voltage (III / 3)         | 500 V  |
| Rated impulse voltage (III / 3) | 6 kV   |
| Rated voltage (III / 2)         | 630 V  |
| Rated impulse voltage (III / 2) | 6 kV   |
| Rated voltage (II / 2)          | 1000 V |
| Rated impulse voltage (II / 2)  | 6 kV   |

|               |      |
|---------------|------|
| Rated current | 16 A |
|---------------|------|

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 15 A  |
| Rated voltage UL (Use Group D) | 300 V |
| Rated current UL (Use Group D) | 10 A  |

#### Approvals per UL 1977

|                                                 |       |
|-------------------------------------------------|-------|
| Rated voltage per UL 1977 (factory wiring only) | 600 V |
| Rated current per UL 1977 (factory wiring only) | 15 A  |

#### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 15 A  |
| Rated voltage CSA (Use Group D) | 300 V |
| Rated current CSA (Use Group D) | 10 A  |

#### Connection data

|                                                             |                                  |
|-------------------------------------------------------------|----------------------------------|
| Connection technology                                       | CAGE CLAMP®                      |
| Actuation type                                              | Operating tool                   |
| Solid conductor                                             | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor                                     | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor with ferrule with plastic collar    | 0.25 ... 1.5 mm²                 |
| Fine-stranded conductor with ferrule without plastic collar | 0.25 ... 2.5 mm²                 |
| Strip length                                                | 8 ... 9 mm / 0.31 ... 0.35 inch  |
| No. of poles                                                | 5                                |
| Total number of connection points                           | 5                                |
| Total number of potentials                                  | 5                                |
| Number of connection types                                  | 1                                |
| Number of levels                                            | 1                                |
| Conductor entry direction to mating direction               | 0°                               |

#### Geometrical Data

|                         |                       |
|-------------------------|-----------------------|
| Pin spacing             | 7.62 mm / 0.3 inch    |
| Width                   | 37.06 mm / 1.459 inch |
| Height                  | 18.8 mm / 0.74 inch   |
| Height from the surface | 14.3 mm / 0.563 inch  |
| Depth                   | 26.45 mm / 1.041 inch |

## Mechanical data

|                    |                                       |
|--------------------|---------------------------------------|
| Gehäuseblechstärke | 0.6 ... 1.2 mm / 0.024 ... 0.047 inch |
| Mounting type      | Snap-in mounting foot                 |
| Type of mounting   | Panel mounting                        |

## Plug connection

|                                    |                         |
|------------------------------------|-------------------------|
| Contact type (pluggable connector) | Female connector/socket |
| Connector connection type          | for conductors          |
| Mismating protection               | No                      |

## Material Data

|                             |                                   |
|-----------------------------|-----------------------------------|
| Color                       | orange                            |
| Material group              | I                                 |
| Insulating material         | Polyamide 66 (PA 66)              |
| Flammability class per UL94 | V0                                |
| Clamping spring material    | Chrome nickel spring steel (CrNi) |
| Contact material            | Copper alloy                      |
| Contact plating             | tin-plated                        |
| Fire load                   | 0.18 MJ                           |
| Weight                      | 10.688 g                          |

## Environmental Requirements

|                         |                |
|-------------------------|----------------|
| Limit temperature range | -60 ... +85 °C |
|-------------------------|----------------|

## Commercial data

|                    |                        |
|--------------------|------------------------|
| Product Group      | 3 (Multi Conn. System) |
| Country of origin  | DE                     |
| GTIN               | 4044918375733          |
| Customs Tariff No. | 85366990990            |

## Compatible products

## General accessories



Item no.: 231-669

231-669

Lockout caps; for covering unused clamping units

## ferrule

|                                                                                    |                                                                                                                                                                                        |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated                                                                          | 216-101 |
|    | <b>Item no.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated                                                                         | 216-102 |
|    | <b>Item no.: 216-103</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated                                                                            | 216-103 |
|    | <b>Item no.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated                                                                          | 216-104 |
|    | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated                                                                          | 216-106 |
|    | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated                                                                          | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated                                                                         | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated                                                                            | 216-123 |
|  | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated                                                                          | 216-124 |
|  | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-131 |
|  | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-132 |
|  | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-141 |
|  | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92 | 216-142 |
|  | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-143 |
|  | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-144 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                            | 216-201 |

|                                                                                   |                                                                                                                                                                                      |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                         | 216-202 |
|    | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                            | 216-203 |
|    | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                                                          | 216-204 |
|    | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                          | 216-221 |
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                         | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                                                          | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|   | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|  | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-244 |
|  | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|  | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-284 |
|                                                                                   | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                         | 216-301 |
|  | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                         | 216-302 |
|                                                                                   | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                         | 216-321 |
|  | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                         | 216-322 |

## Mounting adapter



|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
| <b>Item no.: 209-148</b>                                                          | 209-148 |
| Multi mounting adapter; for male and female connectors with snap-in mounting feet |         |

## Insulation stop



|                                                                     |         |
|---------------------------------------------------------------------|---------|
| <b>Item no.: 231-673</b>                                            | 231-673 |
| Insulation stop; 0.08-0.2 mm <sup>2</sup> / 0.2 mm <sup>2</sup> "s" |         |



|                                             |         |
|---------------------------------------------|---------|
| <b>Item no.: 231-674</b>                    | 231-674 |
| Insulation stop; 0.25 - 0.5 mm <sup>2</sup> |         |



|                                           |         |
|-------------------------------------------|---------|
| <b>Item no.: 231-675</b>                  | 231-675 |
| Insulation stop; 0.75 - 1 mm <sup>2</sup> |         |

## Marking accessories

|                                                                                                                                                         |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| <b>Item no.: 210-331/762-202</b>                                                                                                                        | 210-331 |
| Marking strips; as a DIN A4 sheet; MARKED; 1-16 (100x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive |         |

|                                                                                                                                             |         |
|---------------------------------------------------------------------------------------------------------------------------------------------|---------|
| <b>Item no.: 210-332/762-020</b>                                                                                                            | 210-332 |
| Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive |         |

## tools



|                                                    |         |
|----------------------------------------------------|---------|
| <b>Item no.: 231-131</b>                           | 231-131 |
| Push-button; for female and male connectors; loose |         |



|                                                                                                              |         |
|--------------------------------------------------------------------------------------------------------------|---------|
| <b>Item no.: 231-159</b>                                                                                     | 231-159 |
| Operating tool; for male and female connectors with CAGE CLAMP®; of Series 231, 232, 721, 722, 723, 731, 732 |         |



|                                                                             |         |
|-----------------------------------------------------------------------------|---------|
| <b>Item no.: 231-231</b>                                                    | 231-231 |
| Combination operating tool; for male and female connectors with CAGE CLAMP® |         |



|                                                                        |         |
|------------------------------------------------------------------------|---------|
| <b>Item no.: 231-291</b>                                               | 231-291 |
| Operating tool; for male and female connectors with CAGE CLAMP®; loose |         |

## assembling



|                                                         |         |
|---------------------------------------------------------|---------|
| <b>Item no.: 209-137</b>                                | 209-137 |
| Mounting adapter; can be used as end plate; 6.5 mm wide |         |

## Strain relief plate



|                          |         |
|--------------------------|---------|
| <b>Item no.: 232-685</b> | 232-685 |
| Strain relief housing    |         |

## check



|                                      |         |
|--------------------------------------|---------|
| <b>Item no.: 210-136</b>             | 210-136 |
| Test plug; 2 mm Ø; with 500 mm cable |         |



|                                        |         |
|----------------------------------------|---------|
| <b>Item no.: 210-137</b>               | 210-137 |
| Test plug; 2.3 mm Ø; with 500 mm cable |         |



|                                                                      |         |
|----------------------------------------------------------------------|---------|
| <b>Item no.: 231-662</b>                                             | 231-662 |
| Test plugs for female connectors; for 7.5 mm and 7.62 mm pin spacing |         |



Downloads  
CAD/CAE - Smart Data  
CAD data

| 3D Download 231-705/008-000 | URL | Download |
|-----------------------------|-----|----------|
|-----------------------------|-----|----------|



Subject to changes.