



**Data sheet | Item number: 232-835/031-000**

THT female header; 0.6 x 1.0 mm solder pin; angled; clamping collar; Pin spacing 7.5 mm; 5-pole



232-835/031-000

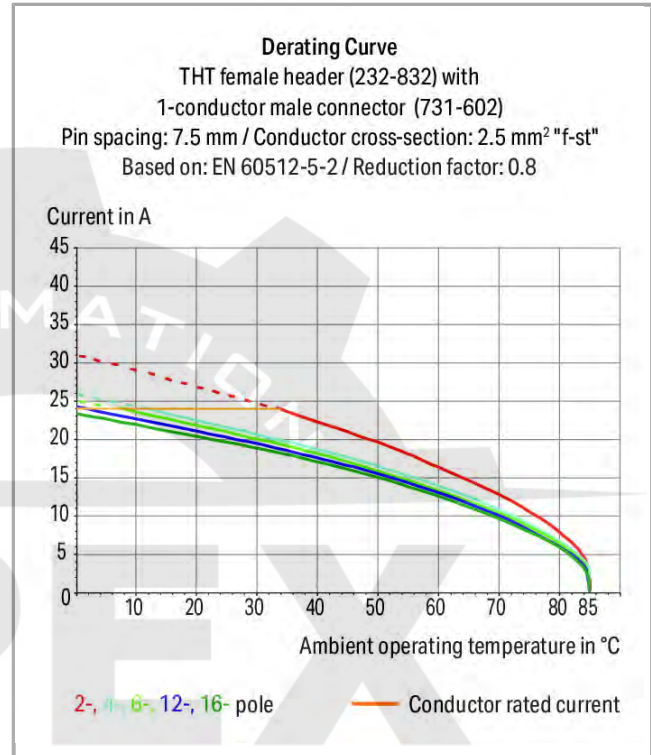

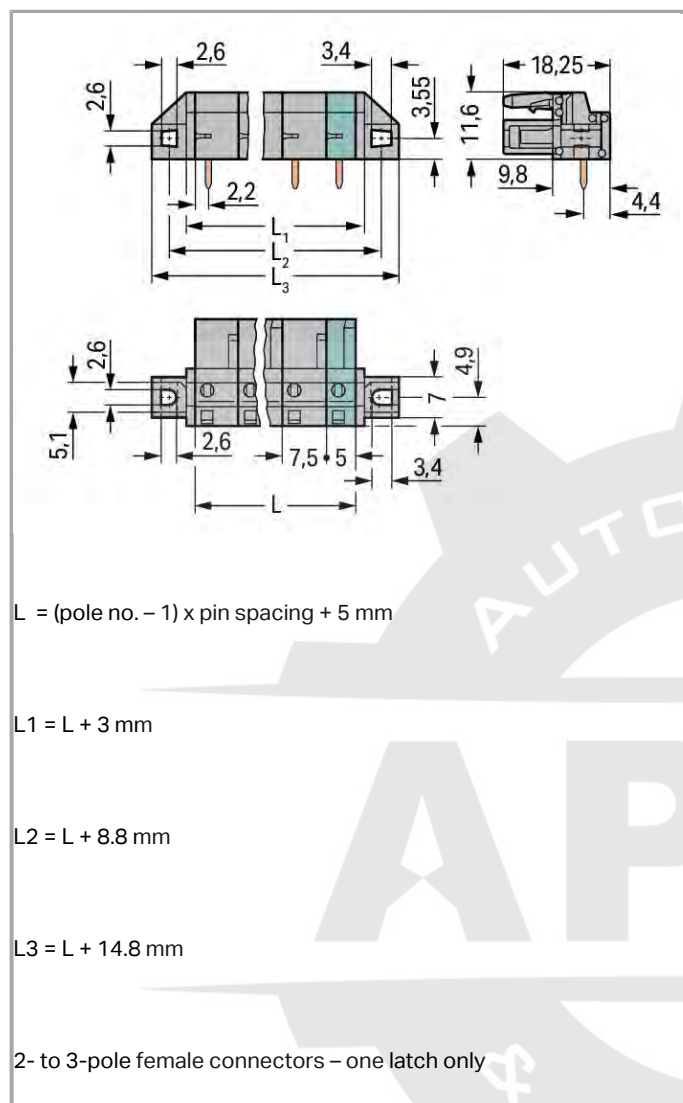

### Item description

- Horizontal or vertical PCB mounting via straight or angled solder pins
- For board-to-board and board-to-wire connections
- Touch-proof PCB outputs
- Easy-to-identify PCB inputs and outputs
- With coding fingers

### Safety information 1:

The *MULTI CONNECTION SYSTEM (MCS)* is designed without breaking capacity for compliance with DIN EN 61984. When used as intended, MCS Connectors shall not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

### Data

#### Electrical data

## Ratings per IEC/EN 60664-1

|                                 |        |
|---------------------------------|--------|
| Rated voltage (III / 3)         | 500 V  |
| Rated impulse voltage (III / 3) | 6 kV   |
| Rated voltage (III / 2)         | 630 V  |
| Rated impulse voltage (III / 2) | 6 kV   |
| Rated voltage (II / 2)          | 1000 V |
| Rated impulse voltage (II / 2)  | 6 kV   |
| Rated current                   | 12 A   |

## Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 15 A  |
| Rated voltage UL (Use Group D) | 300 V |
| Rated current UL (Use Group D) | 10 A  |

## Approvals per UL 1977

|                                                 |       |
|-------------------------------------------------|-------|
| Rated voltage per UL 1977 (factory wiring only) | 600 V |
| Rated current per UL 1977 (factory wiring only) | 15 A  |

## Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 15 A  |
| Rated voltage CSA (Use Group D) | 300 V |
| Rated current CSA (Use Group D) | 10 A  |

## Connection data

|                            |   |
|----------------------------|---|
| No. of poles               | 5 |
| Total number of potentials | 5 |
| Number of connection types | 1 |
| Number of levels           | 1 |

## Geometrical Data

|                         |                       |
|-------------------------|-----------------------|
| Pin spacing             | 7.5 mm / 0.295 inch   |
| Width                   | 49.8 mm / 1.961 inch  |
| Height                  | 16.6 mm / 0.654 inch  |
| Height from the surface | 11.6 mm / 0.457 inch  |
| Depth                   | 18.25 mm / 0.719 inch |
| Solder pin length       | 5 mm                  |

|                                   |                                |
|-----------------------------------|--------------------------------|
| Solder pin dimensions             | 0.6 x 1 mm                     |
| Drilled hole diameter (tolerance) | 1.3 <sup>(- ... +0.1)</sup> mm |

## Mechanical data

|                  |                                         |
|------------------|-----------------------------------------|
| Mounting type    | Mounting flange                         |
| Type of mounting | Feed-through mounting<br>Panel mounting |

## Plug connection

|                                    |                         |
|------------------------------------|-------------------------|
| Contact type (pluggable connector) | Female connector/socket |
| Connector connection type          | for PCBs                |
| Mismating protection               | No                      |
| Mating direction to the PCB        | 0°                      |

## PCB contact

|                                     |                                           |
|-------------------------------------|-------------------------------------------|
| PCB contact                         | THT                                       |
| Solder pin arrangement              | over the entire female connector, in line |
| Number of solder pins per potential | 1                                         |

## Material Data

|                             |                      |
|-----------------------------|----------------------|
| Color                       | gray                 |
| Material group              | I                    |
| Insulating material         | Polyamide 66 (PA 66) |
| Flammability class per UL94 | V0                   |
| Contact material            | Copper alloy         |
| Contact plating             | tin-plated           |
| Fire load                   | 0 MJ                 |
| Weight                      | 6.1 g                |

## Environmental Requirements

|                         |                |
|-------------------------|----------------|
| Limit temperature range | -60 ... +85 °C |
|-------------------------|----------------|

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4055143270861 |
| Customs Tariff No. | 85366990990   |

## Approvals / Certificates

### UL-Approvals

| Logo                                                                             | Approval                             | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------|--------------------------|------------------|
|  | UR<br>Underwriters Laboratories Inc. | UL 1059                  | E45172           |
|  | UR<br>Underwriters Laboratories Inc. | UL 1977                  | E45171           |

## Compatible products

### assembling

|                                                                                    |                                                                         |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------|
|    | Item no.: 209-147<br>Self-tapping screw                                 | 209-147 |
|    | Item no.: 231-194<br>Self-tapping screw; B 2.2x13, fixing hole 1.8 mm Ø | 231-194 |
|  | Item no.: 231-195<br>Screw with nut; M2x12; for fixing element          | 231-195 |
|  | Item no.: 231-295<br>Screw with nut                                     | 231-295 |

### check

|                                                                                    |                                                                                           |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------|
|  | Item no.: 210-136<br>Test plug; 2 mm Ø; with 500 mm cable                                 | 210-136 |
|  | Item no.: 210-137<br>Test plug; 2.3 mm Ø; with 500 mm cable                               | 210-137 |
|  | Item no.: 231-662<br>Test plugs for female connectors; for 7.5 mm and 7.62 mm pin spacing | 231-662 |

### Marking accessories

|                                                                                    |                                                                               |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------|
|  | Item no.: 210-833<br>Marking strips; on reel; 6 mm wide; plain; Self-adhesive | 210-833 |
|  | Item no.: 210-834<br>Marking strips; on reel; 5 mm wide; plain; Self-adhesive | 210-834 |

## Downloads

### CAD/CAE - Smart Data

#### PCB libraries

|                                                                                 |     |     |          |
|---------------------------------------------------------------------------------|-----|-----|----------|
| DesignSpark Library for WAGO Pluggable PCB Connectors (MULTI CONNECTION SYSTEM) | 2.1 | zip | Download |
|---------------------------------------------------------------------------------|-----|-----|----------|



|                                                                            |             |        |          |
|----------------------------------------------------------------------------|-------------|--------|----------|
| Compatible with DesignSpark PCB Version 4.x or higher                      | Oct 6, 2014 | 6.1 MB |          |
| TARGET Library for WAGO Pluggable PCB Connectors (Multi-Connection System) | 1.1.0       | zip    | Download |
| Compatible with TARGET PCB Design Software Version 17.x                    | Oct 6, 2014 | 7.4 MB |          |
| EAGLE Library for WAGO Pluggable PCB Connectors (MULTI CONNECTION SYSTEM)  | 2.1         | zip    | Download |
| Compatible with EAGLE PCB Design Software Version 6.x or higher            | Oct 6, 2014 | 6.2 MB |          |



Subject to changes.