


**Data sheet | Item number: 235-727/331-000**

Stackable 2-conductor PCB terminal block; push-button; 0.75 mm<sup>2</sup>; Pin spacing 7.5/7.62 mm; 1-pole; PUSH WIRE®



235-727/331-000

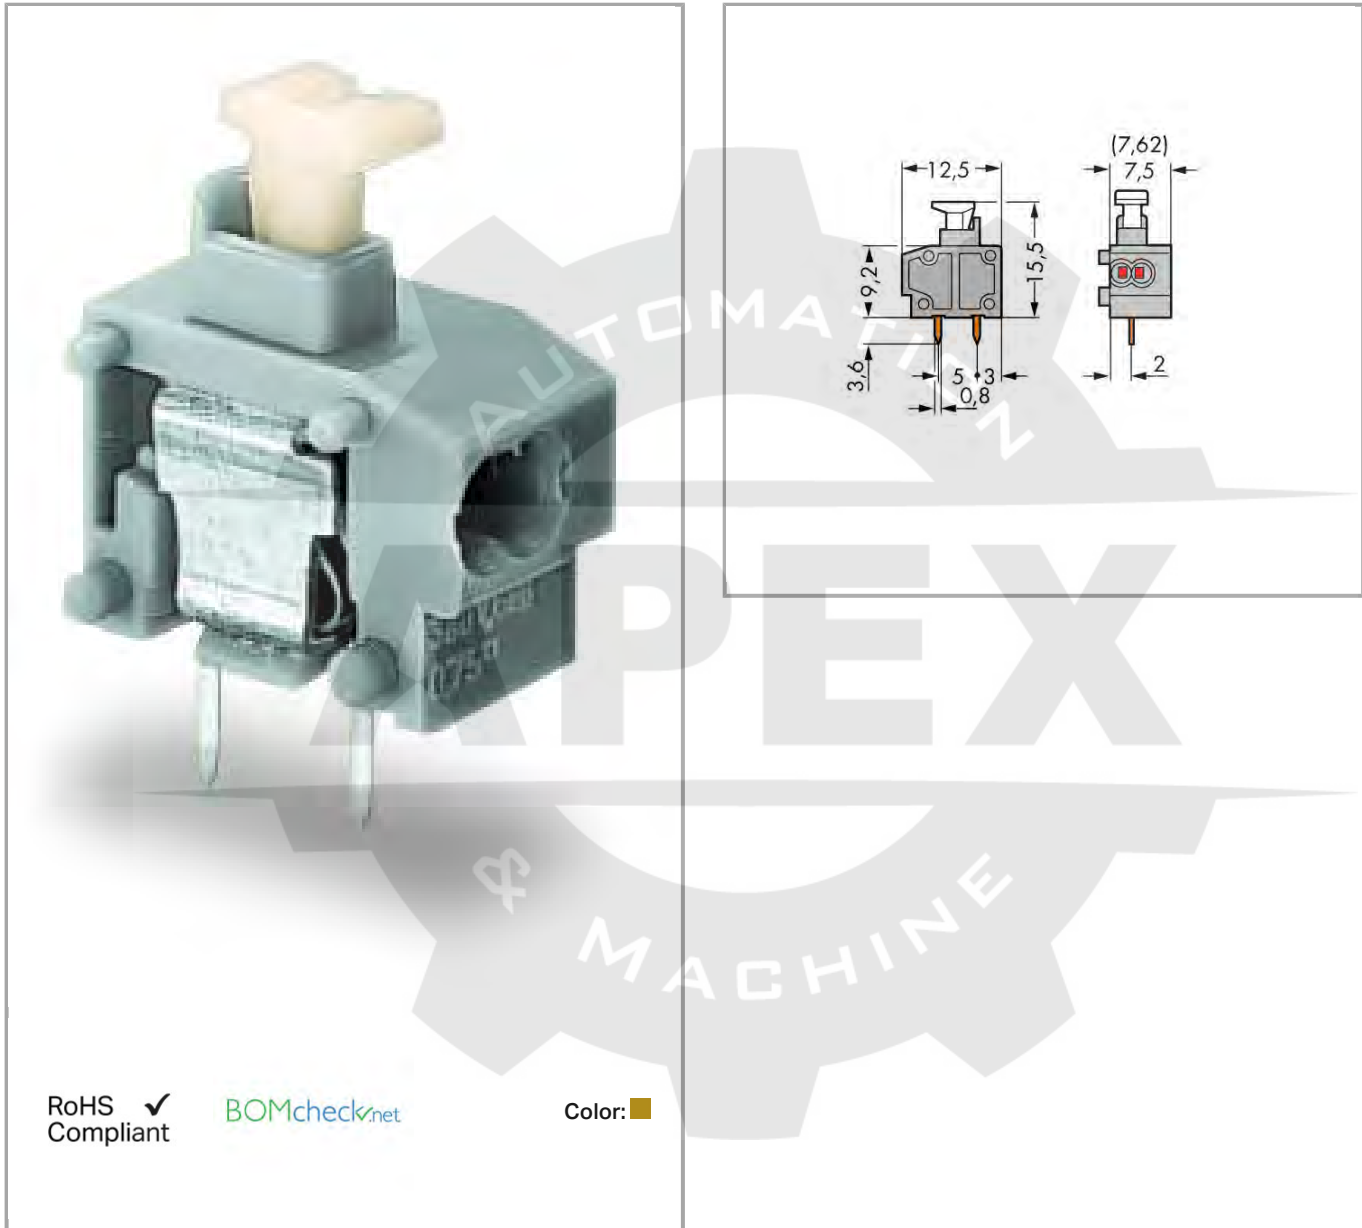

**Item description**

- Modular terminal blocks with push-buttons and PUSH WIRE® connection, for custom terminal strip assemblies
- Double-conductor connection for commoning signals
- Simple push-in termination for solid conductors
- Easy conductor removal via push-button

- Set to metric or inch pin spacing by compressing terminal strips together or pulling them apart
- Also available with test slot

## Data

### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |        |
|---------------------------------|--------|
| Rated voltage (III / 3)         | 400 V  |
| Rated impulse voltage (III / 3) | 6 kV   |
| Rated voltage (III / 2)         | 630 V  |
| Rated impulse voltage (III / 2) | 6 kV   |
| Rated voltage (II / 2)          | 1000 V |
| Rated impulse voltage (II / 2)  | 6 kV   |
| Rated current                   | 10 A   |

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 10 A  |
| Rated voltage UL (Use Group D) | 300 V |
| Rated current UL (Use Group D) | 10 A  |

#### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 10 A  |

### Connection data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Connection technology             | PUSH WIRE®                                   |
| Actuation type                    | Push-button                                  |
| Solid conductor                   | 0.2 ... 0.75 mm <sup>2</sup> / 24 ... 18 AWG |
| Strip length                      | 9 ... 10 mm / 0.35 ... 0.39 inch             |
| Conductor entry angle to the PCB  | 0°                                           |
| No. of poles                      | 1                                            |
| Total number of connection points | 2                                            |
| Total number of potentials        | 1                                            |
| Number of connection types        | 1                                            |
| Number of levels                  | 1                                            |

### Geometrical Data

|             |                              |
|-------------|------------------------------|
| Pin spacing | 7.5/7.62 mm / 0.295/0.3 inch |
|-------------|------------------------------|



|                                   |                                 |
|-----------------------------------|---------------------------------|
| Width                             | 9 mm / 0.354 inch               |
| Height                            | 19.1 mm / 0.752 inch            |
| Height from the surface           | 15.5 mm / 0.61 inch             |
| Depth                             | 12.5 mm / 0.492 inch            |
| Solder pin length                 | 3.6 mm                          |
| Solder pin dimensions             | 0.8 x 0.4 mm                    |
| Drilled hole diameter (tolerance) | $1^{(- \dots +0.1)} \text{ mm}$ |

## PCB contact

|                                     |                                    |
|-------------------------------------|------------------------------------|
| PCB contact                         | THT                                |
| Solder pin arrangement              | within the terminal block, in line |
| Number of solder pins per potential | 2                                  |

## Material Data

|                             |                                   |
|-----------------------------|-----------------------------------|
| Color                       | light green                       |
| Material group              | I                                 |
| Insulating material         | Polyamide 66 (PA 66)              |
| Flammability class per UL94 | V0                                |
| Clamping spring material    | Chrome nickel spring steel (CrNi) |
| Contact material            | Electrolytic copper ( $E_{Cu}$ )  |
| Contact plating             | tin-plated                        |
| Fire load                   | 0.018 MJ                          |
| Weight                      | 0.906 g                           |

## Environmental Requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|

## Commercial data

|                    |                     |
|--------------------|---------------------|
| Product Group      | 4 (Printed Circuit) |
| Country of origin  | CH                  |
| GTIN               | 4044918832144       |
| Customs Tariff No. | 85369010000         |

## Approvals / Certificates

### Country specific Approvals

| Logo | Approval                        | Additional Approval Text | Certificate name |
|------|---------------------------------|--------------------------|------------------|
|      | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2149549.02       |



|                                                                                  |                                              |              |                 |
|----------------------------------------------------------------------------------|----------------------------------------------|--------------|-----------------|
| CCA                                                                              | CCA<br>DEKRA Certification B.V.              | EN 60947     | NTR NL-<br>7144 |
|                                                                                  | CCA<br>DEKRA Certification B.V.              | EN 60947-7-4 | NTR NL-<br>7625 |
|                                                                                  | CCA<br>DEKRA Certification B.V.              | EN 60998     | NTR NL<br>6919  |
|  | VDE<br>VDE Prüf- und Zertifizierungsinstitut | EN 60947     | 40029328        |

#### Ship Approvals

| Logo                                                                               | Approval                                         | Additional Approval Text | Certificate name         |
|------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|--------------------------|
|  | ABS<br>American Bureau of Shipping               | -                        | 14-<br>HG1241537-<br>PDA |
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE000016Z               |

#### Compatible products

##### ferrule

|                                                                                    |                                                                                                         |         |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------|
|  | Item no.: 216-101<br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated  | 216-101 |
|  | Item no.: 216-102<br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated | 216-102 |
|  | Item no.: 216-103<br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated    | 216-103 |
|  | Item no.: 216-104<br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated  | 216-104 |

|                                                                                    |                                                                                                                                                                                        |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated                                                                          | 216-106 |
|    | <b>Item no.: 216-107</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; uninsulated; electro-tin plated                                                                            | 216-107 |
|    | <b>Item no.: 216-108</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; uninsulated; electro-tin plated                                                                            | 216-108 |
|    | <b>Item no.: 216-109</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; uninsulated; electro-tin plated                                                                            | 216-109 |
|    | <b>Item no.: 216-110</b><br>Ferrule; Sleeve for 16 mm <sup>2</sup> / AWG 6; uninsulated; electro-tin plated                                                                            | 216-110 |
|    | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated                                                                          | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated                                                                         | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated                                                                            | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated                                                                          | 216-124 |
|   | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-131 |
|  | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-132 |
|  | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-141 |
|  | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92 | 216-142 |
|  | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-143 |
|  | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-144 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                                                         | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                            | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                           | 216-202 |
|                                                                                    | <b>Item no.: 216-203</b>                                                                                                                                                               |         |

|                                                                                   |                                                                                                                                                                                      |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                                                        | 216-203 |
|    | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                                                          | 216-204 |
|    | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                                                         | 216-205 |
|    | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                                                          | 216-206 |
|    | <b>Item no.: 216-207</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated                                                                            | 216-207 |
|    | <b>Item no.: 216-208</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-208 |
|    | <b>Item no.: 216-209</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; insulated; electro-tin plated                                                                            | 216-209 |
|    | <b>Item no.: 216-210</b><br>Ferrule; Sleeve for 16 mm <sup>2</sup> / AWG 6; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-210 |
|    | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                                                          | 216-221 |
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                                                         | 216-222 |
|  | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|  | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                                                          | 216-224 |
|  | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|  | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|  | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|  | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-244 |
|  | <b>Item no.: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-246 |
|  | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|                                                                                   | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped;                                    | 216-263 |

|                                                                                    |                                                                                                                                                                                     |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|     | acc. to DIN 46228, Part 4/09.90                                                                                                                                                     |         |
|     | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-264 |
|     | <b>Item no.: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-266 |
|     | <b>Item no.: 216-267</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90   | 216-267 |
|     | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-284 |
|     | <b>Item no.: 216-286</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-286 |
|     | <b>Item no.: 216-287</b><br>Ferrule; Sleeve for 4 mm <sup>2</sup> / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90   | 216-287 |
|     | <b>Item no.: 216-288</b><br>Ferrule; Sleeve for 6 mm <sup>2</sup> / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90   | 216-288 |
|   | <b>Item no.: 216-289</b><br>Ferrule; Sleeve for 10 mm <sup>2</sup> / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90   | 216-289 |
|                                                                                    | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                        | 216-301 |
|   | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                        | 216-302 |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                                                        | 216-321 |
|   | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                                                        | 216-322 |
| <b>End plate</b>                                                                   |                                                                                                                                                                                     |         |
|  | <b>Item no.: 235-700</b><br>End plate; snap-fit type; 1 mm thick                                                                                                                    | 235-700 |

## Downloads

### CAD/CAE - Smart Data

#### PCB libraries

|                                                                                                           |                      |                |          |
|-----------------------------------------------------------------------------------------------------------|----------------------|----------------|----------|
| TARGET Library for WAGO PCB Terminal Blocks<br>Compatible with TARGET PCB Design Software Version 17.x    | 1.1.0<br>Oct 6, 2014 | zip<br>27.1 MB | Download |
| DesignSpark Library for WAGO PCB Terminal Blocks<br>Compatible with DesignSpark PCB Version 4.x or higher | 2.1<br>Oct 6, 2014   | zip<br>22.5 MB | Download |



|                                                                 |             |         |          |
|-----------------------------------------------------------------|-------------|---------|----------|
| EAGLE Library for WAGO PCB Terminal Blocks                      | 2.1         | zip     | Download |
| Compatible with EAGLE PCB Design Software Version 6.x or higher | Oct 6, 2014 | 23.9 MB |          |

CAD data

|                             |     |          |
|-----------------------------|-----|----------|
| 3D Download 235-727/331-000 | URL | Download |
|-----------------------------|-----|----------|



Subject to changes.