


Data sheet | Item number: 243-112

Mounting carrier; for 4 connectors; 243 Series; for DIN-35 rail mounting
/screw mounting



243-112

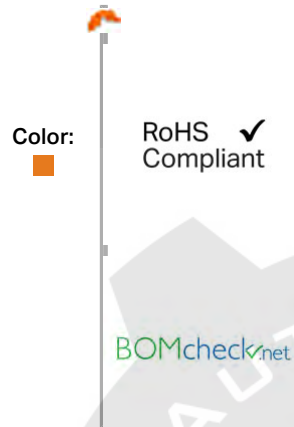

Data

Material Data

Color	orange
Fire load	0.08 MJ
Weight	1.9 g

Commercial data

Product Group	7 (Push Wire Conn.)
Country of origin	DE
GTIN	4017332335508
Customs Tariff No.	39269097900

Compatible products

General accessories

	Item no.: 243-144 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-144
	Item no.: 243-204 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-204
	Item no.: 243-208 MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; dark gray housing; light gray cover; max. ambient operating temp. 60 °C	243-208
	Item no.: 243-304 MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; light gray housing; light gray cover; max. ambient operating temp. 60 °C	243-304



Item no.: 243-308
MICRO PUSH WIRE® connector for junction boxes; 8-conductor terminal block

243-308



Item no.: 243-504
MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block

243-504



Item no.: 243-508
MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; max. ambient operating temp. 60 °C

243-508



Item no.: 243-804
MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block

243-804



Item no.: 243-808
MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; max. ambient operating temp. 60 °C

243-808

Marking accessories

Item no.: 210-833
Marking strips; on reel; 6 mm wide; plain; Self-adhesive

210-833



Item no.: 243-110
Marking strips; permanent adhesive

243-110

Downloads**Documentation****Bid Text**

243-112

doc
24.1 kB

[Download](#)**CAD/CAE - Smart Data****CAD data**

3D Download 243-112

[URL](#)[Download](#)

Subject to changes.