


Data sheet | Item number: 243-113

Mounting carrier; for 6 connectors; 243 Series; for DIN-35 rail mounting
/screw mounting



243-113

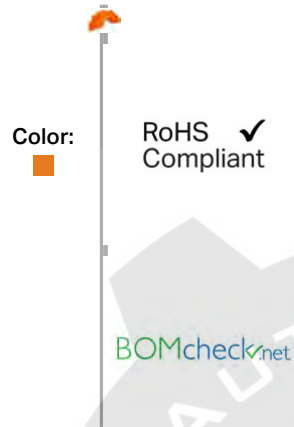

Data

Material Data

Color	orange
Fire load	0.08 MJ
Weight	2.64 g

Commercial data

Product Group	7 (Push Wire Conn.)
Country of origin	DE
GTIN	4017332335492
Customs Tariff No.	39269097900

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60998	NTR NL 7486
	CSA DEKRA Certification B.V.	C22.2	70048857
	KEMA/KEUR DEKRA Certification B.V.	EN 60998	2193300.01



Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS American Bureau of Shipping	-	18-HG1755093-PDA

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UR Underwriters Laboratories Inc.	UL 1059	E45172

Compatible products

Marking accessories

	Item no.: 210-833 Marking strips; on reel; 6 mm wide; plain; Self-adhesive	210-833
	Item no.: 243-110 Marking strips; permanent adhesive	243-110

General accessories

	Item no.: 243-144 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-144
	Item no.: 243-204 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-204
	Item no.: 243-208 MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; dark gray housing; light gray cover; max. ambient operating temp. 60 °C	243-208
	Item no.: 243-304 MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 4-conductor; light gray housing; light gray cover; max. ambient operating temp. 60 °C	243-304
	Item no.: 243-308 MICRO PUSH WIRE® connector for junction boxes; 8-conductor terminal block	243-308
	Item no.: 243-504 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-504
	Item no.: 243-508	




	MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; max. ambient operating temp. 60 °C	243-508
	Item no.: 243-804 MICRO PUSH WIRE® connector for junction boxes; 4-conductor terminal block	243-804
	Item no.: 243-808 MICRO PUSH WIRE® connector for junction boxes; for solid conductors; 0.8 mm Ø; 8-conductor; light gray cover; max. ambient operating temp. 60 °C	243-808

Downloads
Documentation

Bid Text

243-113	doc 24.1 kB	Download
---------	----------------	----------

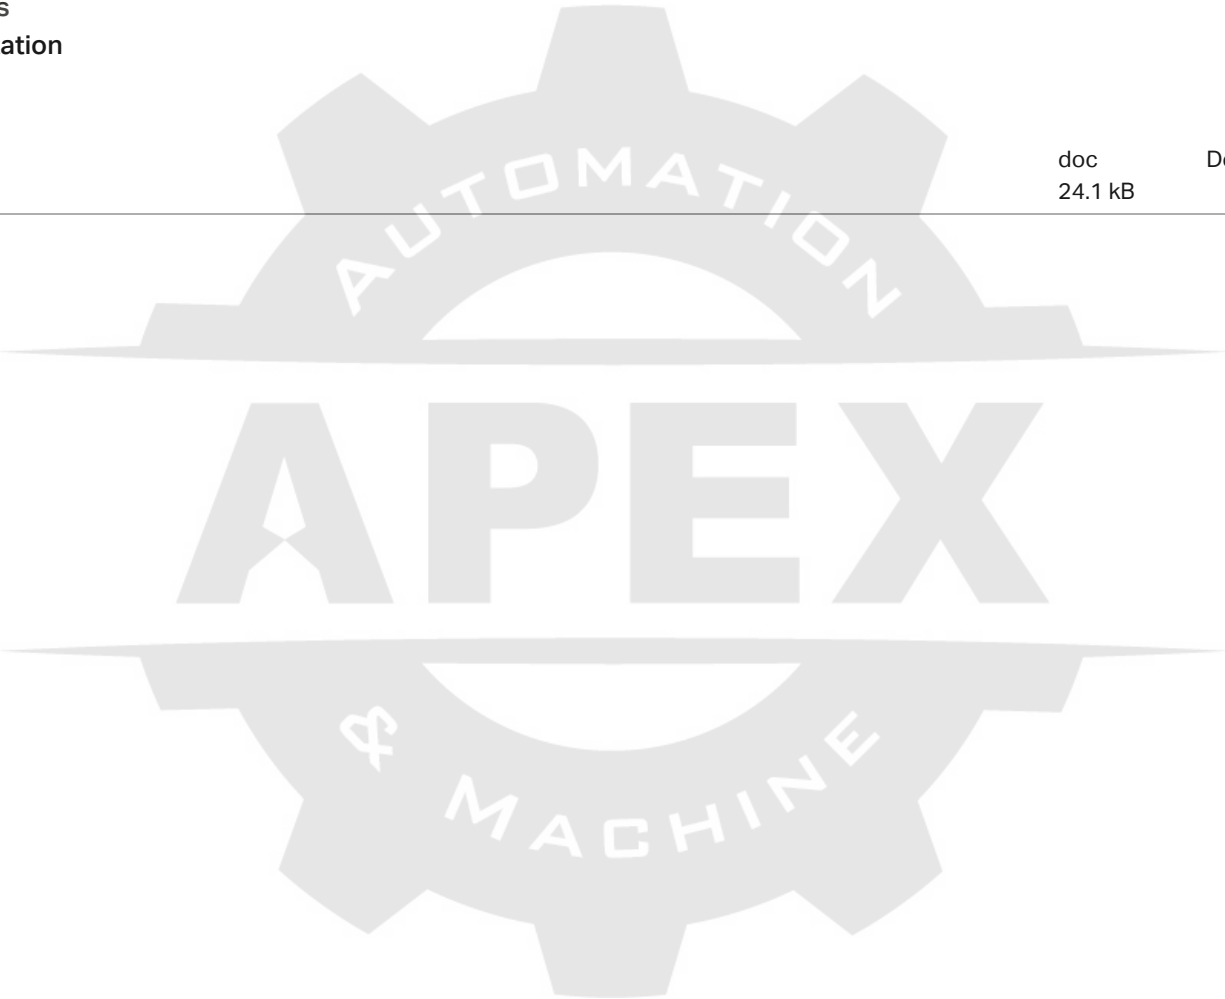

Subject to changes.