

## Data sheet | Item number: 256-742

Stackable PCB terminal block; push-button; 2.5 mm<sup>2</sup>; Pin spacing 5/5.08 mm;  
1-pole; CAGE CLAMP®; commoning option



256-742





RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

**Current-Carrying Capacity Curve**  
Pin spacing: 5 mm / Conductor cross-section: 2.5 mm<sup>2</sup> "f-st"  
Based on: EN 60512-5-2 / Reduction factor: 1

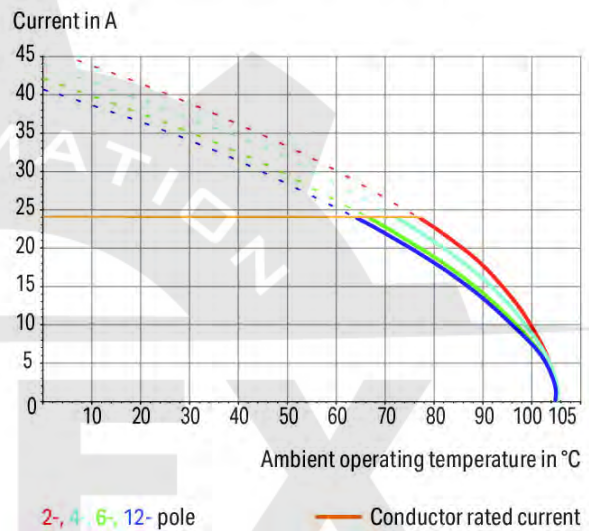

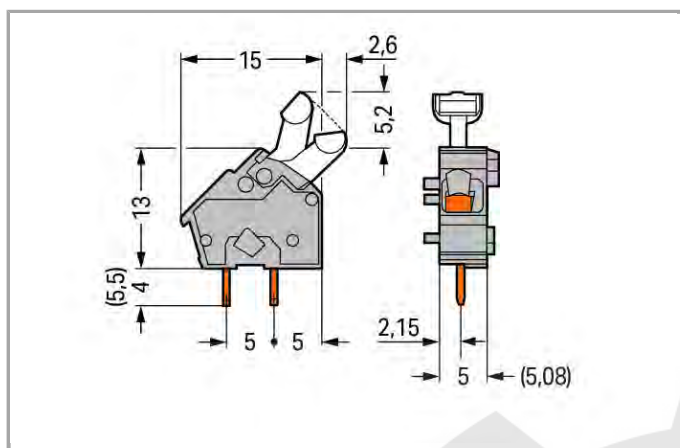

### Item description

- PCB modular terminal blocks with push-buttons and CAGE CLAMP® connection
- Versions with Ex approval
- Set to metric or inch pin spacing by compressing PCB terminal strips or pulling them apart
- Ideal for in-the-field wiring thanks to simplified push-button actuation
- Convenient, tool-free operation

## Data

### Electrical data

### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 250 V |
| Rated impulse voltage (III / 3) | 4 kV  |
| Rated voltage (III / 2)         | 320 V |
| Rated impulse voltage (III / 2) | 4 kV  |
| Rated voltage (II / 2)          | 630 V |
| Rated impulse voltage (II / 2)  | 4 kV  |
| Rated current                   | 24 A  |

## Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 15 A  |
| Rated voltage UL (Use Group D) | 300 V |
| Rated current UL (Use Group D) | 10 A  |

## Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 15 A  |
| Rated voltage CSA (Use Group D) | 300 V |
| Rated current CSA (Use Group D) | 10 A  |

## Connection data

|                                                             |                                  |
|-------------------------------------------------------------|----------------------------------|
| Connection technology                                       | CAGE CLAMP®                      |
| Actuation type                                              | Push-button                      |
| Solid conductor                                             | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor                                     | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor with ferrule with plastic collar    | 0.25 ... 1.5 mm²                 |
| Fine-stranded conductor with ferrule without plastic collar | 0.25 ... 1.5 mm²                 |
| Strip length                                                | 5 ... 6 mm / 0.2 ... 0.24 inch   |
| Conductor entry angle to the PCB                            | 45°                              |
| Note (conductor cross-section)                              | 12 AWG: THHN, THWN               |
| No. of poles                                                | 1                                |
| Total number of connection points                           | 1                                |
| Total number of potentials                                  | 1                                |
| Number of connection types                                  | 1                                |
| Number of levels                                            | 1                                |

## Geometrical Data

|                                   |                                |
|-----------------------------------|--------------------------------|
| Pin spacing                       | 5/5.08 mm / 0.197/0.2 inch     |
| Width                             | 7.8 mm / 0.307 inch            |
| Height                            | 22.2 mm / 0.874 inch           |
| Height from the surface           | 18.2 mm / 0.717 inch           |
| Depth                             | 17.6 mm / 0.693 inch           |
| Solder pin length                 | 4 mm                           |
| Solder pin dimensions             | 0.7 x 0.7 mm                   |
| Drilled hole diameter (tolerance) | 1.1 <sup>(- ... +0.1)</sup> mm |

## PCB contact

|                                     |                                    |
|-------------------------------------|------------------------------------|
| PCB contact                         | THT                                |
| Solder pin arrangement              | within the terminal block, in line |
| Number of solder pins per potential | 2                                  |

## Material Data

|                             |                                   |
|-----------------------------|-----------------------------------|
| Color                       | dark gray                         |
| Material group              | I                                 |
| Insulating material         | Polyamide 66 (PA 66)              |
| Flammability class per UL94 | V0                                |
| Clamping spring material    | Chrome nickel spring steel (CrNi) |
| Contact material            | Electrolytic copper ( $E_{Cu}$ )  |
| Contact plating             | tin-plated                        |
| Fire load                   | 0.014 MJ                          |
| Weight                      | 0.951 g                           |

## Environmental Requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|

## Commercial data

|                    |                     |
|--------------------|---------------------|
| Product Group      | 4 (Printed Circuit) |
| Country of origin  | CH                  |
| GTIN               | 4044918758659       |
| Customs Tariff No. | 85369010000         |

## Approvals / Certificates

### Country specific Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2160584.34       |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7138      |
|  | CCA<br>DEKRA Certification B.V. | IEC 60947-7-4            | 2175633.01       |
|  | CSA<br>DEKRA Certification B.V. | C22.2 No. 158            | 70049157         |

## Ship Approvals

| Logo                                                                             | Approval                                                | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|------------------|
|  | <b>ABS</b><br>American Bureau of Shipping               | -                        | 14-HG1241537-PDA |
|  | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE000016Z       |

## UL-Approvals

| Logo                                                                             | Approval                                   | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------------|--------------------------|------------------|
|  | <b>UL</b><br>UL International Germany GmbH | UL 1059                  | E45172           |

## Compatible products

### End plate

|                                                                                    |                                                                  |         |
|------------------------------------------------------------------------------------|------------------------------------------------------------------|---------|
|  | <b>Item no.: 256-100</b><br>End plate; snap-fit type; 1 mm thick | 256-100 |
|  | <b>Item no.: 256-200</b><br>End plate; snap-fit type; 1 mm thick | 256-200 |
|  | <b>Item no.: 256-300</b><br>End plate; snap-fit type; 1 mm thick | 256-300 |
|  | <b>Item no.: 256-400</b><br>End plate; snap-fit type; 1 mm thick | 256-400 |
|  | <b>Item no.: 256-500</b><br>End plate; snap-fit type; 1 mm thick | 256-500 |
|  | <b>Item no.: 256-600</b><br>End plate; snap-fit type; 1 mm thick | 256-600 |
|  | <b>Item no.: 256-700</b><br>End plate; snap-fit type; 1 mm thick | 256-700 |
|  | <b>Item no.: 256-800</b><br>End plate; snap-fit type; 1 mm thick | 256-800 |

## check

**Item no.: 249-110**

Test plug adapter; suitable for 255, 256, 257 Series PCB terminal blocks; 1-pole; Pin spacing 5 mm / 0.197 in

249-110

**Item no.: 249-111**

Test plug adapter; suitable for 255, 256, 257 Series PCB terminal blocks; 1-pole; Pin spacing 5.08 mm / 0.2 in

249-111

## ferrule

**Item no.: 216-101**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-101

**Item no.: 216-102**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-102

**Item no.: 216-103**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-103

**Item no.: 216-104**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-104

**Item no.: 216-121**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-121

**Item no.: 216-122**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-122

**Item no.: 216-123**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-123

**Item no.: 216-124**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-124

**Item no.: 216-131**

Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-131

**Item no.: 216-132**

Ferrule; Sleeve for 0.34 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-132

**Item no.: 216-141**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

216-141

**Item no.: 216-142**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

216-142

**Item no.: 216-143**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

216-143

**Item no.: 216-144**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

216-144

**Item no.: 216-151**

Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-151

**Item no.: 216-152**

Ferrule; Sleeve for 0.34 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-152

|                                                                                   |                                                                                                                                                                          |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                          | 216-201 |
|    | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                         | 216-202 |
|    | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                            | 216-203 |
|    | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated                                                                          | 216-204 |
|    | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                          | 216-221 |
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                         | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated                                                                          | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|  | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|  | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-244 |
|  | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|  | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-284 |
|                                                                                   | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated                                                                         | 216-301 |
|  | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated                                                                         | 216-302 |
|                                                                                   | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated                                                                         | 216-321 |

**Item no.: 216-322**Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated

216-322

**Marking accessories****Item no.: 210-332/500-202**

Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/500-202

210-332

**Item no.: 210-332/500-204**

Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/500-204

210-332

**Item no.: 210-332/500-205**

Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/500-205

210-332

**Item no.: 210-332/500-206**

Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/500-206

210-332

**Item no.: 210-332/508-202**

Marking strips; as a DIN A4 sheet; MARKED; 1-16 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/508-202

210-332

**Item no.: 210-332/508-204**

Marking strips; as a DIN A4 sheet; MARKED; 17-32 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/508-204

210-332

**Item no.: 210-332/508-205**

Marking strips; as a DIN A4 sheet; MARKED; 1-32 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/508-205

210-332

**Item no.: 210-332/508-206**

Marking strips; as a DIN A4 sheet; MARKED; 33-48 (160x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

/508-206

210-332

**tools****Item no.: 210-658**

Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled

210-658

**Item no.: 210-720**

Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720

**Downloads****CAD/CAE - Smart Data****CAD data**

3D Download 256-742

URL

Download

**PCB libraries**

TARGET Library for WAGO PCB Terminal Blocks

1.1.0

zip

Download

Compatible with TARGET PCB Design Software Version 17.x

Oct 6, 2014

27.1 MB





|                                                                                                               |                    |                |          |
|---------------------------------------------------------------------------------------------------------------|--------------------|----------------|----------|
| DesignSpark Library for WAGO PCB Terminal Blocks<br>Compatible with DesignSpark PCB Version 4.x or higher     | 2.1<br>Oct 6, 2014 | zip<br>22.5 MB | Download |
| EAGLE Library for WAGO PCB Terminal Blocks<br>Compatible with EAGLE PCB Design Software Version 6.x or higher | 2.1<br>Oct 6, 2014 | zip<br>23.9 MB | Download |



Subject to changes.