


## Data sheet | Item number: 257-559

PCB terminal block; push-button; 2.5 mm<sup>2</sup>; Pin spacing 7.5/7.62 mm; 9-pole;  
CAGE CLAMP®; commoning option



257-559

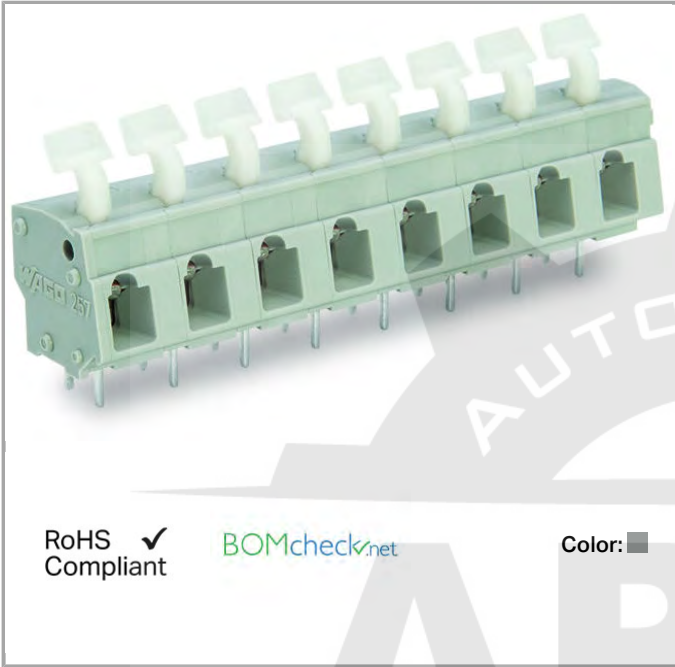



RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

### Current-Carrying Capacity Curve

Pin spacing: 5 mm / Conductor cross-section: 2.5 mm<sup>2</sup> "f-st"  
Based on: EN 60512-5-2 / Reduction factor: 1

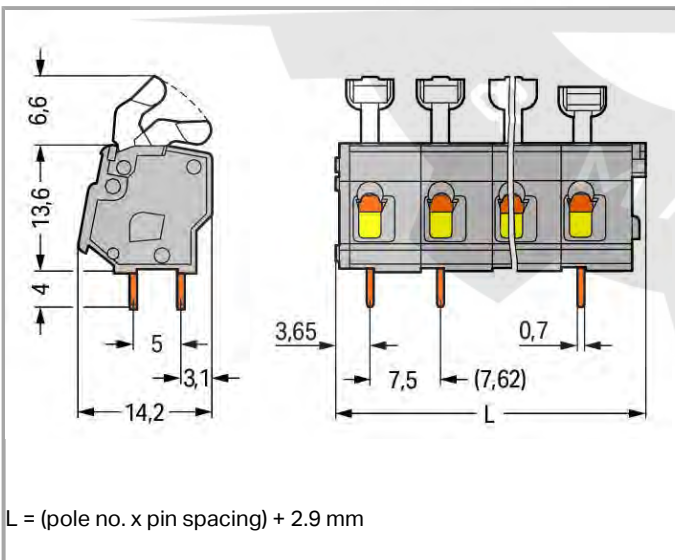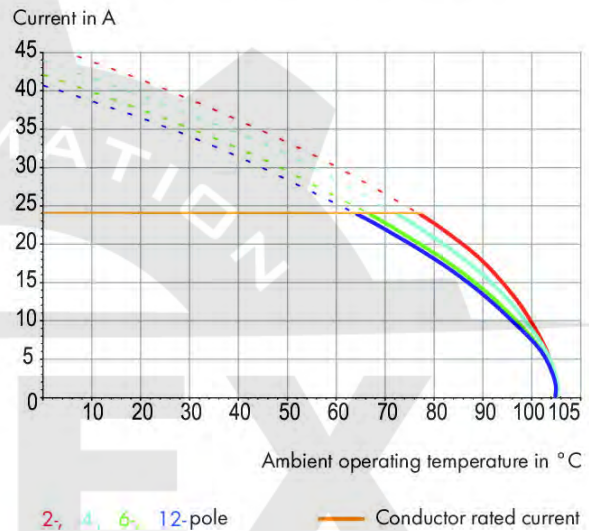

### Item description

- PCB terminal strips with push-buttons and CAGE CLAMP® connection

- Versions with Ex approval
- Set to metric or inch pin spacing by compressing PCB terminal strips or pulling them apart
- Ideal for in-the-field wiring thanks to simplified push-button actuation
- Convenient, tool-free operation
- Versions with angled push-buttons for simple top-of-unit actuation

## Data

### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |        |
|---------------------------------|--------|
| Rated voltage (III / 3)         | 400 V  |
| Rated impulse voltage (III / 3) | 6 kV   |
| Rated voltage (III / 2)         | 630 V  |
| Rated impulse voltage (III / 2) | 6 kV   |
| Rated voltage (II / 2)          | 1000 V |
| Rated impulse voltage (II / 2)  | 6 kV   |
| Rated current                   | 24 A   |

#### Approvals per UL 1059

|                                |       |
|--------------------------------|-------|
| Rated voltage UL (Use Group B) | 300 V |
| Rated current UL (Use Group B) | 15 A  |
| Rated voltage UL (Use Group D) | 300 V |
| Rated current UL (Use Group D) | 10 A  |

#### Approvals per CSA

|                                 |       |
|---------------------------------|-------|
| Rated voltage CSA (Use Group B) | 300 V |
| Rated current CSA (Use Group B) | 15 A  |
| Rated voltage CSA (Use Group D) | 300 V |
| Rated current CSA (Use Group D) | 10 A  |

### Connection data

|                                                             |                                  |
|-------------------------------------------------------------|----------------------------------|
| Connection technology                                       | CAGE CLAMP®                      |
| Actuation type                                              | Push-button, angled              |
| Solid conductor                                             | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor                                     | 0.08 ... 2.5 mm² / 28 ... 12 AWG |
| Fine-stranded conductor with ferrule with plastic collar    | 0.25 ... 1.5 mm²                 |
| Fine-stranded conductor with ferrule without plastic collar | 0.25 ... 1.5 mm²                 |
| Strip length                                                | 5 ... 6 mm / 0.2 ... 0.24 inch   |
| Conductor entry angle to the PCB                            | 0°                               |

|                                   |                    |
|-----------------------------------|--------------------|
| Note (conductor cross-section)    | 12 AWG: THHN, THWN |
| No. of poles                      | 9                  |
| Total number of connection points | 9                  |
| Total number of potentials        | 9                  |
| Number of connection types        | 1                  |
| Number of levels                  | 1                  |

## Geometrical Data

|                                   |                                |
|-----------------------------------|--------------------------------|
| Pin spacing                       | 7.5/7.62 mm / 0.295/0.3 inch   |
| Width                             | 70.4 mm / 2.772 inch           |
| Height                            | 24.2 mm / 0.953 inch           |
| Height from the surface           | 20.2 mm / 0.795 inch           |
| Depth                             | 14.2 mm / 0.559 inch           |
| Solder pin length                 | 4 mm                           |
| Solder pin dimensions             | 0.7 x 0.7 mm                   |
| Drilled hole diameter (tolerance) | 1.1 <sup>(- ... +0.1)</sup> mm |

## PCB contact

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| PCB contact                         | THT                                     |
| Solder pin arrangement              | over the entire terminal strip, in line |
| Number of solder pins per potential | 2                                       |

## Material Data

|                             |                                        |
|-----------------------------|----------------------------------------|
| Color                       | gray                                   |
| Material group              | I                                      |
| Insulating material         | Polyamide 66 (PA 66)                   |
| Flammability class per UL94 | V0                                     |
| Clamping spring material    | Chrome nickel spring steel (CrNi)      |
| Contact material            | Electrolytic copper (E <sub>Cu</sub> ) |
| Contact plating             | tin-plated                             |
| Fire load                   | 0.23 MJ                                |
| Weight                      | 12.672 g                               |

## Environmental Requirements

|                         |                 |
|-------------------------|-----------------|
| Limit temperature range | -60 ... +105 °C |
|-------------------------|-----------------|

## Commercial data

|                   |                     |
|-------------------|---------------------|
| Product Group     | 4 (Printed Circuit) |
| Country of origin | PL                  |

|                    |               |
|--------------------|---------------|
| GTIN               | 4044918677233 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Country specific Approvals

| Logo                                                                              | Approval                        | Additional Approval Text | Certificate name |
|-----------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|   | CCA<br>DEKRA Certification B.V. | EN 60947-7-4             | 2169331.22       |
|   | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7128      |
|   | CCA<br>DEKRA Certification B.V. | EN 60947-7-4             | NTR NL-7388      |
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | 2160584.28       |

### Ship Approvals

| Logo                                                                               | Approval                                         | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|------------------|
|  | ABS<br>American Bureau of Shipping               | -                        | 14-HG1241537-PDA |
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE000016Z       |

## Compatible products

### ferrule

|                                                                                    |                                                                                                        |         |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------|
|  | Item no.: 216-101<br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated | 216-101 |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------|

|                                                                                    |                                                                                                                                                                            |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                         | 216-102 |
|    | <b>Item no.: 216-103</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                            | 216-103 |
|    | <b>Item no.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                          | 216-104 |
|    | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated                                                                          | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated                                                                         | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated                                                                            | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated                                                                          | 216-124 |
|    | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-131 |
|    | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-132 |
|   | <b>Item no.: 216-141</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-141 |
|  | <b>Item no.: 216-142</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92 | 216-142 |
|  | <b>Item no.: 216-143</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92    | 216-143 |
|  | <b>Item no.: 216-144</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92  | 216-144 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated                                                                         | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                            | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                           | 216-202 |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                              | 216-203 |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated                                                                            | 216-204 |
|                                                                                    | <b>Item no.: 216-221</b>                                                                                                                                                   |         |

|                                                                                   |                                                                                                                                                                          |         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|    | Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated                                                                                                      | 216-221 |
|    | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated                                                                         | 216-222 |
|    | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated                                                                            | 216-223 |
|    | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated                                                                          | 216-224 |
|    | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-241 |
|    | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-242 |
|    | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-243 |
|    | <b>Item no.: 216-244</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-244 |
|    | <b>Item no.: 216-262</b><br>Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90 | 216-262 |
|   | <b>Item no.: 216-263</b><br>Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90    | 216-263 |
|  | <b>Item no.: 216-264</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-264 |
|  | <b>Item no.: 216-284</b><br>Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90  | 216-284 |
|                                                                                   | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated                                                                         | 216-301 |
|  | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated                                                                         | 216-302 |
|                                                                                   | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated                                                                         | 216-321 |
|  | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated                                                                         | 216-322 |
| <b>tools</b>                                                                      |                                                                                                                                                                          |         |
|  | <b>Item no.: 210-658</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled                                                           | 210-658 |
|  | <b>Item no.: 210-720</b><br>Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm                                                                  | 210-720 |

**Marking accessories**

**Item no.: 210-332/750-020**

Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

// 750-020

210-332

**Item no.: 210-332/762-020**

Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive

// 762-020

210-332

**check****Item no.: 249-112**

Test plug adapter; suitable for 255, 256, 257 Series PCB terminal blocks; 1-pole; Pin spacing 7.5 mm / 0.295 in

249-112

**Item no.: 249-113**

Test plug adapter; suitable for 255, 256, 257 Series PCB terminal blocks; 1-pole; Pin spacing 7.62 mm / 0.3 in

249-113

**Downloads****CAD/CAE - Smart Data****CAD data**

3D Download 257-559

URL

Download

**PCB libraries**

TARGET Library for WAGO PCB Terminal Blocks

Compatible with TARGET PCB Design Software Version 17.x

1.1.0

Oct 6, 2014

zip

27.1 MB

Download

EAGLE Library for WAGO PCB Terminal Blocks

Compatible with EAGLE PCB Design Software Version 6.x or higher

2.1

Oct 6, 2014

zip

23.9 MB

Download

DesignSpark Library for WAGO PCB Terminal Blocks

Compatible with DesignSpark PCB Version 4.x or higher

2.1

Oct 6, 2014

zip

22.5 MB

Download

Subject to changes.