



## Data sheet | Item number: 261-160/341-000

2-conductor terminal strip; 10-pole; on both sides with push-buttons; with snap-in mounting feet; for plate thickness 0.6 - 1.2 mm; Fixing hole 3.5 mm Ø; 2.5 mm<sup>2</sup>; CAGE CLAMP®

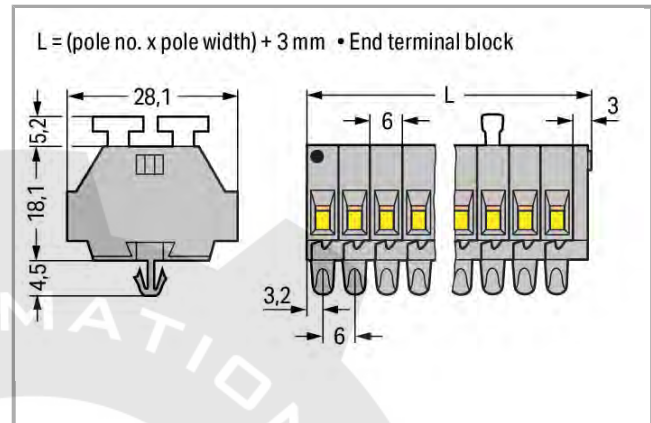

261-160/341-000

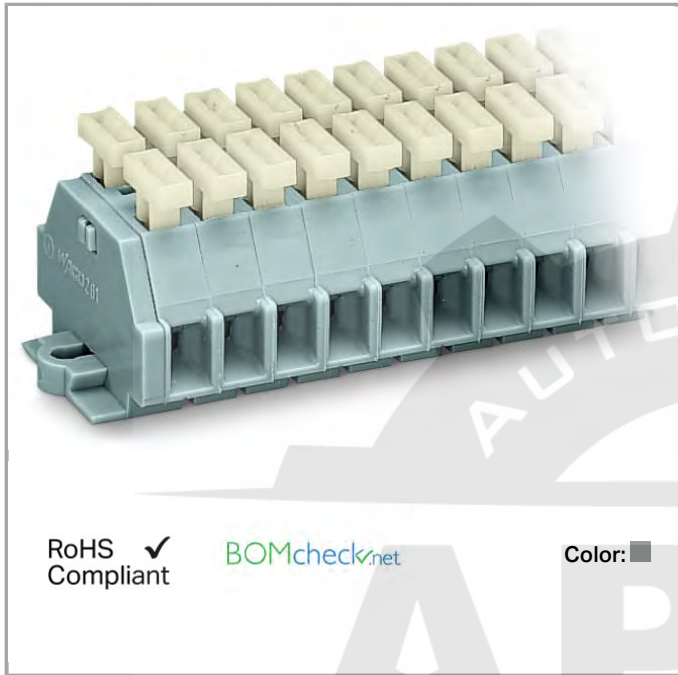

RoHS  
Compliant ✓

BOMcheck.net

Color: ■

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 500 V |
| Rated impulse voltage (III / 3) | 6 kV  |
| Rated current                   | 24 A  |

#### Connection data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Connection technology             | CAGE CLAMP®                                  |
| Actuation type                    | Operating tool<br>Push-button                |
| Connectable conductor materials   | Copper                                       |
| Solid conductor                   | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor           | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                      | 8 ... 9 mm / 0.31 ... 0.35 inch              |
| No. of poles                      | 10                                           |
| Total number of connection points | 20                                           |
| Total number of potentials        | 10                                           |

|                  |                   |
|------------------|-------------------|
| Number of levels | 1                 |
| Type of wiring   | Side-entry wiring |

## Geometrical Data

|                         |                      |
|-------------------------|----------------------|
| Width                   | 64.4 mm / 2.535 inch |
| Height from the surface | 23.2 mm / 0.913 inch |
| Depth                   | 28 mm / 1.102 inch   |
| Module width            | 6 mm / 0.236 inch    |

## Mechanical data

|               |                       |
|---------------|-----------------------|
| Design        | horizontal            |
| Mounting type | Snap-in mounting foot |
| Marking level | Side marking          |

## Material Data

|           |          |
|-----------|----------|
| Color     | gray     |
| Fire load | 0.541 MJ |
| Weight    | 27.213 g |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4044918629799 |
| Customs Tariff No. | 85369010000   |

## Approvals / Certificates

### Country specific Approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60998                 | 2110272.02       |
|  | CCA<br>DEKRA Certification B.V. | EN 60998                 | NTR-NL<br>6509   |

### Ship Approvals

| Logo | Approval                           | Additional Approval Text | Certificate name  |
|------|------------------------------------|--------------------------|-------------------|
|      | ABS<br>American Bureau of Shipping | -                        | 14-<br>HG1241539- |



PDA



LR  
Lloyds Register

91/20242  
(E6)

## Compatible products

### Carrier rail



Item no.: 210-154  
Aluminum carrier rail; 1000 mm long; 18 mm wide; 7 mm high

210-154

### General accessories



Item no.: 209-122  
Plastic end stop; for WSB markers; for 210-154 aluminum rail

209-122

### ferrule



Item no.: 216-101  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-101



Item no.: 216-102  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-102



Item no.: 216-103  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-103



Item no.: 216-104  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-104



Item no.: 216-106  
Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; uninsulated; electro-tin plated

216-106



Item no.: 216-121  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-121



Item no.: 216-122  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-122



Item no.: 216-123  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-123



Item no.: 216-124  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-124



Item no.: 216-131  
Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-131

|                                                                                    |                                                                                                                                                     |         |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|     | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                      | 216-132 |
|     | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                      | 216-151 |
|     | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated                                      | 216-152 |
|     | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                         | 216-201 |
|     | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                        | 216-202 |
|     | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                           | 216-203 |
|     | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                         | 216-204 |
|     | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                        | 216-205 |
|     | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated                                         | 216-206 |
|    | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                         | 216-221 |
|   | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                                        | 216-222 |
|   | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                                           | 216-223 |
|   | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                                         | 216-224 |
|                                                                                    | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                        | 216-301 |
|   | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                        | 216-302 |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                                        | 216-321 |
|   | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                                        | 216-322 |
| <b>Jumper</b>                                                                      |                                                                                                                                                     |         |
|  | <b>Item no.: 261-402</b><br>Comb-style jumper bar; insulated; 2-way; reduces conductor size to 1.5 mm                                               | 261-402 |
| <b>assembling</b>                                                                  |                                                                                                                                                     |         |
|  | <b>Item no.: 209-120</b><br>Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide | 209-120 |

**Item no.: 209-137**

Mounting adapter; can be used as end plate; 6.5 mm wide

209-137

## tools

**Item no.: 209-132**

Operating tool; for connecting comb-style jumper bar; 2-way; of insulating material

209-132

**Item no.: 210-657**

Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short

210-657

**Item no.: 210-658**

Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled

210-658

**Item no.: 210-720**

Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm

210-720

## Downloads

## Documentation

## Bid Text

261-160/341-000

doc  
26.1 kB

Download

## CAD/CAE - Smart Data

## CAD data

3D Download 261-160/341-000

URL

Download

Subject to changes.