



## Data sheet | Item number: 261-424/341-000

2-conductor terminal strip; 4-pole; on both sides with push-buttons; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; 2.5 mm<sup>2</sup>; CAGE CLAMP®

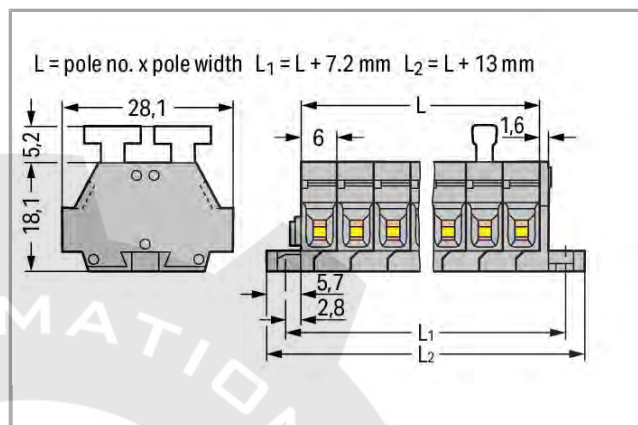

261-424/341-000

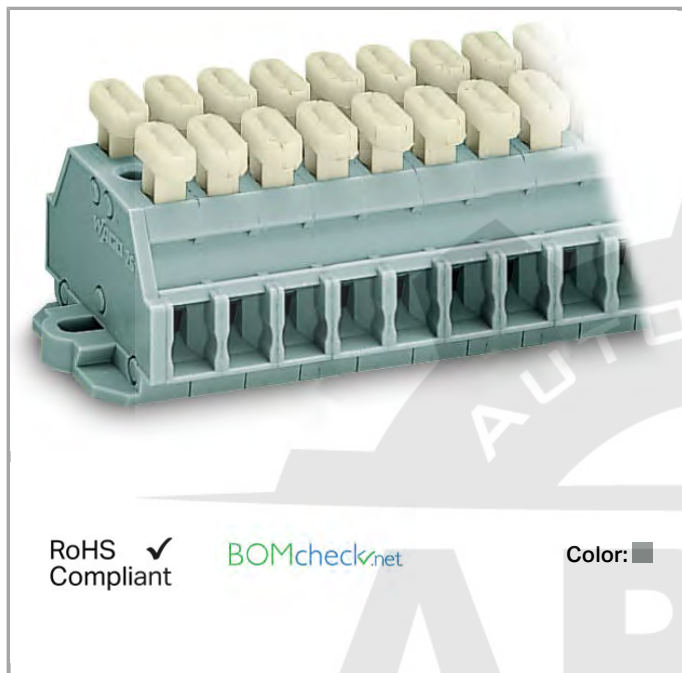

RoHS  
Compliant

BOMcheck.net

Color: ■

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 500 V |
| Rated impulse voltage (III / 3) | 6 kV  |
| Rated current                   | 24 A  |

#### Connection data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Connection technology             | CAGE CLAMP®                                  |
| Actuation type                    | Operating tool<br>Push-button                |
| Connectable conductor materials   | Copper                                       |
| Solid conductor                   | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor           | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                      | 8 ... 9 mm / 0.31 ... 0.35 inch              |
| No. of poles                      | 4                                            |
| Total number of connection points | 8                                            |
| Total number of potentials        | 4                                            |

|                  |                   |
|------------------|-------------------|
| Number of levels | 1                 |
| Type of wiring   | Side-entry wiring |

## Geometrical Data

|                         |                      |
|-------------------------|----------------------|
| Width                   | 37.6 mm / 1.48 inch  |
| Height from the surface | 23.2 mm / 0.913 inch |
| Depth                   | 28 mm / 1.102 inch   |
| Module width            | 6 mm / 0.236 inch    |

## Mechanical data

|               |                 |
|---------------|-----------------|
| Design        | horizontal      |
| Mounting type | Mounting flange |
| Marking level | Side marking    |

## Material Data

|           |          |
|-----------|----------|
| Color     | gray     |
| Fire load | 0.246 MJ |
| Weight    | 11.871 g |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4044918627375 |
| Customs Tariff No. | 85369010000   |

## Compatible products

### tools

|                                                                                    |                                                                                                                 |         |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------|
|  | <b>Item no.: 209-132</b><br>Operating tool; for connecting comb-style jumper bar; 2-way; of insulating material | 209-132 |
|  | <b>Item no.: 210-657</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short          | 210-657 |
|  | <b>Item no.: 210-658</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled  | 210-658 |
|  | <b>Item no.: 210-720</b><br>Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm         | 210-720 |

## ferrule

|                                                                                    |                                                                                                                |         |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------|
|    | <b>Item no.: 216-101</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated  | 216-101 |
|    | <b>Item no.: 216-102</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated | 216-102 |
|    | <b>Item no.: 216-103</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated    | 216-103 |
|    | <b>Item no.: 216-104</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated  | 216-104 |
|    | <b>Item no.: 216-106</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; uninsulated; electro-tin plated  | 216-106 |
|    | <b>Item no.: 216-121</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / AWG 22; uninsulated; electro-tin plated  | 216-121 |
|    | <b>Item no.: 216-122</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / AWG 20; uninsulated; electro-tin plated | 216-122 |
|    | <b>Item no.: 216-123</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; uninsulated; electro-tin plated    | 216-123 |
|    | <b>Item no.: 216-124</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; uninsulated; electro-tin plated  | 216-124 |
|  | <b>Item no.: 216-131</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated | 216-131 |
|  | <b>Item no.: 216-132</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated | 216-132 |
|  | <b>Item no.: 216-151</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated | 216-151 |
|  | <b>Item no.: 216-152</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / AWG 24; uninsulated; electro-tin plated | 216-152 |
|  | <b>Item no.: 216-201</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated    | 216-201 |
|  | <b>Item no.: 216-202</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated   | 216-202 |
|  | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated      | 216-203 |
|  | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated    | 216-204 |
|  | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated   | 216-205 |
|  | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated    | 216-206 |
|                                                                                    | <b>Item no.: 216-221</b>                                                                                       |         |

|                                                                                    |                                                                                                                               |                      |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------|
|     | Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated                                               | 216-221              |
|     | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated                  | 216-222              |
|     | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated                     | 216-223              |
|     | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated                   | 216-224              |
|                                                                                    | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                  | 216-301              |
|     | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                  | 216-302              |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated                  | 216-321              |
|     | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated                  | 216-322              |
| <b>check</b>                                                                       |                                                                                                                               |                      |
|    | <b>Item no.: 210-136</b><br>Test plug; 2 mm Ø; with 500 mm cable                                                              | 210-136              |
| <b>General accessories</b>                                                         |                                                                                                                               |                      |
|  | <b>Item no.: 209-123</b><br>Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide       | 209-123              |
| <b>assembling</b>                                                                  |                                                                                                                               |                      |
|  | <b>Item no.: 209-137</b><br>Mounting adapter; can be used as end plate; 6.5 mm wide                                           | 209-137              |
| <b>Marking accessories</b>                                                         |                                                                                                                               |                      |
|  | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         | 2009-145             |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145<br>/000-002 |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145<br>/000-005 |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145<br>/000-006 |
|  | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145<br>/000-007 |
|                                                                                    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | 2009-145<br>/000-012 |

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | /000-023 | 2009-145 |
|    | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-024 | 2009-145 |
|    | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|    | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-002 | 248-501  |
|    | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-005 | 248-501  |
|    | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-006 | 248-501  |
|   | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-017 | 248-501  |
|  | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-023 | 248-501  |
|  | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-024 | 248-501  |
| <b>Jumper</b>                                                                      |                                                                                                                               |          |          |
|  | <b>Item no.: 261-402</b><br>Comb-style jumper bar; insulated; 2-way; reduces conductor size to 1.5 mm                         |          | 261-402  |

## Downloads Documentation

### Bid Text

261-424/341-000

doc

[Download](#)



25.1 kB

CAD/CAE - Smart Data

CAD data

|                             |     |          |
|-----------------------------|-----|----------|
| 3D Download 261-424/341-000 | URL | Download |
|-----------------------------|-----|----------|



Subject to changes.