



## Data sheet | Item number: 261-426/341-000

2-conductor terminal strip; 6-pole; on both sides with push-buttons; with fixing flanges; for screw or similar mounting types; Fixing hole 3.2 mm Ø; 2.5 mm<sup>2</sup>; CAGE CLAMP®

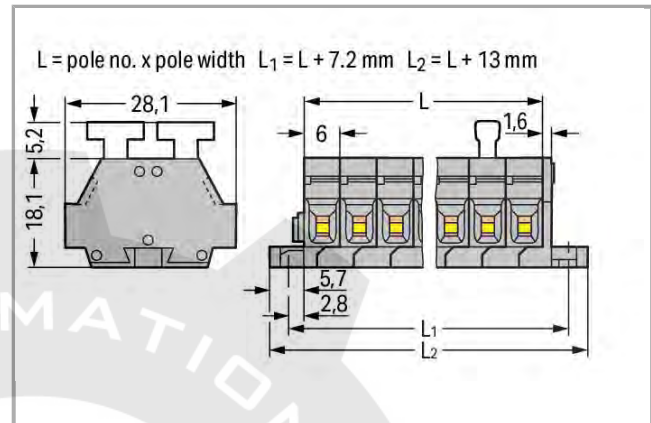

261-426/341-000

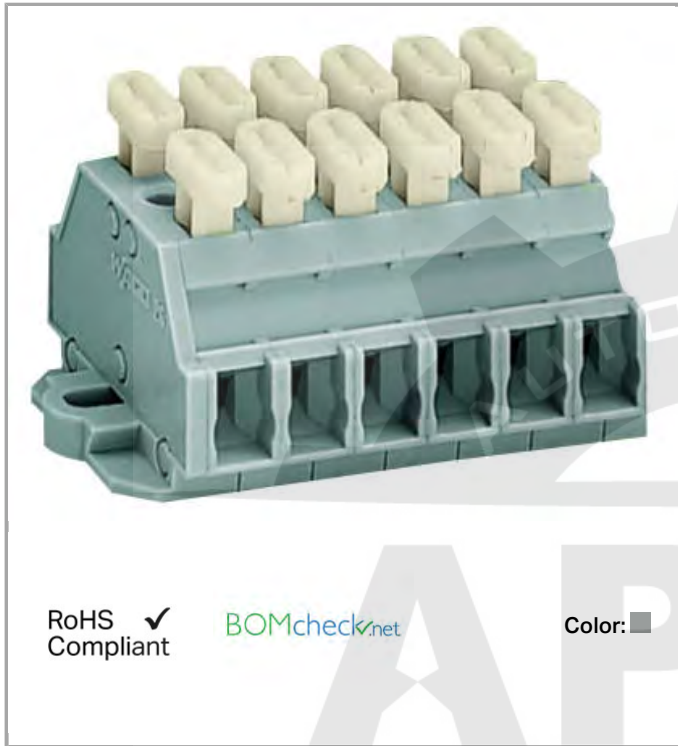

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

|                                 |       |
|---------------------------------|-------|
| Rated voltage (III / 3)         | 500 V |
| Rated impulse voltage (III / 3) | 6 kV  |
| Rated current                   | 24 A  |

#### Connection data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Connection technology             | CAGE CLAMP®                                  |
| Actuation type                    | Operating tool<br>Push-button                |
| Connectable conductor materials   | Copper                                       |
| Solid conductor                   | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor           | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                      | 8 ... 9 mm / 0.31 ... 0.35 inch              |
| No. of poles                      | 6                                            |
| Total number of connection points | 12                                           |

|                            |                   |
|----------------------------|-------------------|
| Total number of potentials | 6                 |
| Number of levels           | 1                 |
| Type of wiring             | Side-entry wiring |

## Geometrical Data

|                         |                      |
|-------------------------|----------------------|
| Width                   | 49.6 mm / 1.953 inch |
| Height from the surface | 23.2 mm / 0.913 inch |
| Depth                   | 28 mm / 1.102 inch   |
| Module width            | 6 mm / 0.236 inch    |

## Mechanical data

|               |                 |
|---------------|-----------------|
| Design        | horizontal      |
| Mounting type | Mounting flange |
| Marking level | Side marking    |

## Material Data

|           |          |
|-----------|----------|
| Color     | gray     |
| Fire load | 0.354 MJ |
| Weight    | 17.311 g |

## Commercial data

|                    |               |
|--------------------|---------------|
| Country of origin  | DE            |
| GTIN               | 4044918627412 |
| Customs Tariff No. | 85369010000   |

## Compatible products

### Jumper



**Item no.: 261-402**  
 Comb-style jumper bar; insulated; 2-way; reduces conductor size to 1.5 mm

261-402

### check



**Item no.: 210-136**  
 Test plug; 2 mm Ø; with 500 mm cable

210-136

### assembling



**Item no.: 209-137**  
 Mounting adapter; can be used as end plate; 6.5 mm wide

209-137

## Marking accessories

|                                                                                    |                                                                                                                               |          |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------|----------|
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type         |          | 2009-145 |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-002 | 2009-145 |
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-005 | 2009-145 |
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-006 | 2009-145 |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-007 | 2009-145 |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-012 | 2009-145 |
|   | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type  | /000-023 | 2009-145 |
|  | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type | /000-024 | 2009-145 |
|  | <b>Item no.: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card  |          | 248-501  |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-002 | 248-501  |
|  | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-005 | 248-501  |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-006 | 248-501  |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-007 | 248-501  |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-012 | 248-501  |
|  | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type                      | /000-017 | 248-501  |

**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-023

248-501

**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type

/000-024

248-501

**General accessories****Item no.: 209-123**

Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide

209-123

**ferrule****Item no.: 216-101**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-101

**Item no.: 216-102**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-102

**Item no.: 216-103**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-103

**Item no.: 216-104**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-104

**Item no.: 216-106**Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; uninsulated; electro-tin plated

216-106

**Item no.: 216-121**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated

216-121

**Item no.: 216-122**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated

216-122

**Item no.: 216-123**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated

216-123

**Item no.: 216-124**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated

216-124

**Item no.: 216-131**Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-131

**Item no.: 216-132**Ferrule; Sleeve for 0.34 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-132

**Item no.: 216-151**Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-151

**Item no.: 216-152**Ferrule; Sleeve for 0.34 mm<sup>2</sup> / AWG 24; uninsulated; electro-tin plated

216-152

**Item no.: 216-201**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated

216-201

**Item no.: 216-202**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated

216-202

|                                                                                    |                                                                                                                 |         |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------|
|     | <b>Item no.: 216-203</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated       | 216-203 |
|     | <b>Item no.: 216-204</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated     | 216-204 |
|     | <b>Item no.: 216-205</b><br>Ferrule; Sleeve for 2.08 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated    | 216-205 |
|     | <b>Item no.: 216-206</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated     | 216-206 |
|     | <b>Item no.: 216-221</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated     | 216-221 |
|     | <b>Item no.: 216-222</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated    | 216-222 |
|     | <b>Item no.: 216-223</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated       | 216-223 |
|     | <b>Item no.: 216-224</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated     | 216-224 |
|                                                                                    | <b>Item no.: 216-301</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated    | 216-301 |
|    | <b>Item no.: 216-302</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated    | 216-302 |
|                                                                                    | <b>Item no.: 216-321</b><br>Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated    | 216-321 |
|   | <b>Item no.: 216-322</b><br>Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated    | 216-322 |
| <b>tools</b>                                                                       |                                                                                                                 |         |
|  | <b>Item no.: 209-132</b><br>Operating tool; for connecting comb-style jumper bar; 2-way; of insulating material | 209-132 |
|   | <b>Item no.: 210-657</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short          | 210-657 |
|   | <b>Item no.: 210-658</b><br>Operating tool with partially insulated shaft; Blade (3.5 x 0.5) mm; short; angled  | 210-658 |
|   | <b>Item no.: 210-720</b><br>Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm         | 210-720 |

## Downloads

## Documentation

## Bid Text

261-426/341-000

doc  
25.1 kB

Download



CAD/CAE - Smart Data

CAD data

|                             |     |          |
|-----------------------------|-----|----------|
| 3D Download 261-426/341-000 | URL | Download |
|-----------------------------|-----|----------|



Subject to changes.