

Data Sheet | Item Number: 267-173


Female connector; with direct ground contact; with snap-in mounting feet; 3-pole;
1,00 mm²; white

<https://www.wago.com/267-173>



Color: white

Similar to illustration

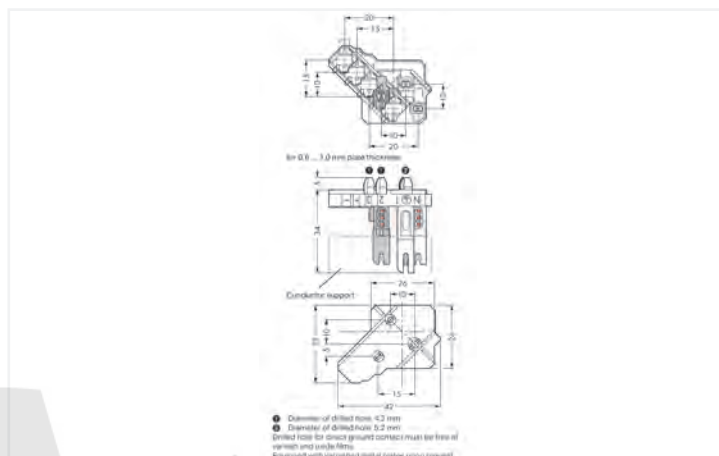

Dimensions in mm

- 1) Diameter of drilled hole: 4.2 mm
- 2) Diameter of drilled hole: 5.2 mm

Drilled hole for direct PE contact must be free of varnish and oxide films. Equipped with varnished metal plates upon request.

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	500 V
Rated impulse voltage (III/2)	4 kV
Rated current	6 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Connection data

Number of connection types	1	Connection 1	
		Connection technology	PUSH WIRE®
		Strip length	8 mm / 0.31 inches
		Pole number	3

Physical data

Width	26 mm / 1.024 inches
Height from the surface	34 mm / 1.339 inches
Depth	42 mm / 1.654 inches



Material Data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.154 MJ
Weight	7.1 g

Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4044918499736
Customs tariff number	85366990990

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-173



Documentation

Additional Information

Technical Section

03.04.2019

pdf
1949.09 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-173



CAE data

EPLAN Data Portal
267-173



ZUKEN Portal 267-173

