
Female connector; with direct ground contact; 7-pole; 1,00 mm²; white

www.wago.com/267-177





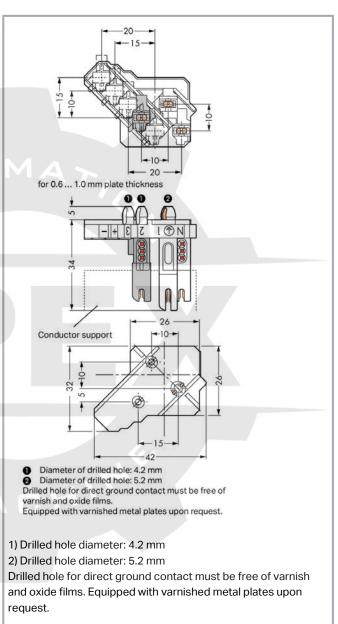

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

www.wago.com/267-177



Item description

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Data

Electrical data

IEC Approvals

| Ratings per | IEC/EN 60664-1 |
|-----------------------------|---|
| Rated voltage (III/2) | 500 V |
| Rated surge voltage (III/2) | 4 kV |
| Rated current | 6 A |
| Legend (ratings) | (III / 2) ≙ Overvoltage category III / Pollution degree 2 |

Connection data

| Connection technology | PUSH WIRE® |
|----------------------------|------------------|
| Strip length | 8 mm / 0.31 inch |
| Pole No. | 7 |
| Number of connection types | 1 |

Physical data

| Width | 26 mm / 1.024 inch |
|-------------------------|--------------------|
| Height from the surface | 34 mm / 1.339 inch |
| Depth | 42 mm / 1.654 inch |

Material data

| Color | white |
|-----------------------------|--|
| Material group | I |
| Insulation material | Polyamide (PA66) |
| Flammability class per UL94 | V0 |
| Clamping spring material | Chrome nickel spring steel (CrNi) |
| Contact material | Electrolytic copper (E _{Cu}) |
| Contact plating | tin-plated |

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO Corporation Germantown, WI 53022 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222 Email: info.us@wago.com | Web: www.wago.us Do you have any questions about our products? We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

www.wago.com/267-177



| Fire load | 0.238 MJ |
|-----------|----------|
| Weight | 13 g |

Environmental requirements

Temperature stability 105°C

Commercial data

| Product Group | 8 (Misc. Chassis Mount Blocks) | |
|-----------------------|--------------------------------|--|
| Packaging type | bag | |
| Country of origin | PL | |
| GTIN | 4044918499835 | |
| Customs tariff number | 8536694040 | |

Approvals / Certificates

Country specific Approvals

| | | | Certificate |
|----------|---|--------------------------|---------------|
| Logo | Approval | Additional Approval Text | name |
| | CCA DEKRA Certification B.V. | EN 61984 | NL-47718 |
| KEMA | KEMA/KEUR DEKRA Certification B.V. | EN 61984 | 71- 100641 |
| \wedge | VDE VDE Prüf- und Zertifizierungsinstitut | EN 61984 | 40032309 |



UL-Approvals

| | | | Certificate |
|------|--------------------------------|--------------------------|-------------|
| Logo | Approval | Additional Approval Text | name |
| | UL | UL 1977 | 20130910- |
| | Underwriters Laboratories Inc. | | E45171 |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation Germantown, WI 53022

Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222

Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products? We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

www.wago.com/267-177



Downloads Documentation

| Additional | Information |
|------------|---------------|
| AUUIIIOHA | HIIIOHIIIAUOH |

Technical explanations Apr 3, 2019 pdf Download 2.0 MB

CAD files

CAD data

2D/3D Models 267-177 URL Download

CAE data

ZUKEN Portal 267-177 URL Download

EPLAN Data Portal 267-177 URL Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-177

Female connector; with direct ground contact; 7-pole; 1,00 mm²; white

URL

Download

Installation Notes

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$