


Data Sheet | Item Number: 267-234

Snap-on type female connector; without ground contact; 4-pole; 1,00 mm²; gray/white

<https://www.wago.com/267-234>



Color: ☐ gray/white

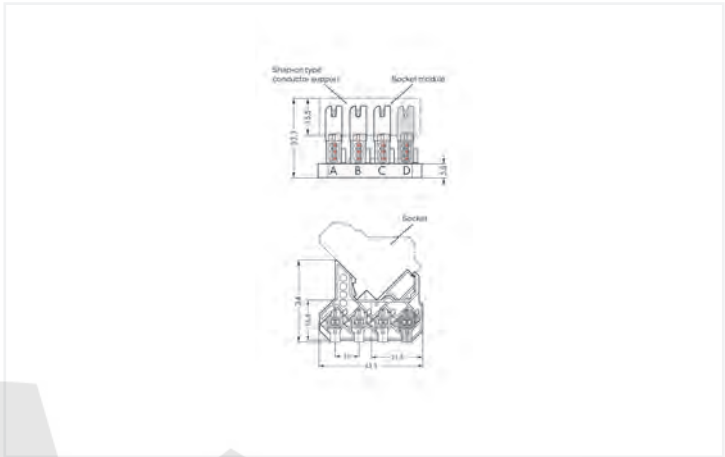

Dimensions in mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per IEC/EN	
Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	500 V
Rated impulse voltage (III/2)	4 kV
Rated current	6 A
Legend (ratings)	(III / 2) Δ Overvoltage category III / Pollution degree 2

Connection data

Number of connection types	1	Connection 1	
		Pole number	4

Material Data

Note (material data)	Information on material specifications can be found here		
Color	gray/white		
Material group	I		
Insulation material	Polyamide (PA66)		
Flammability class per UL94	V0		
Clamping spring material	Chrome-nickel spring steel (CrNi)		
Contact material	Electrolytic copper (E _{Cu})		
Contact plating	Tin		
Fire load	0.164 MJ		
Weight	8.3 g		



Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4045454274245
Customs tariff number	85369010000

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 267-234	↓

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 1949.09 KB	↓

CAD/CAE-Data



CAD data

2D/3D Models 267-234

↓

CAE data

ZUKEN Portal 267-234

↓

