



267-501

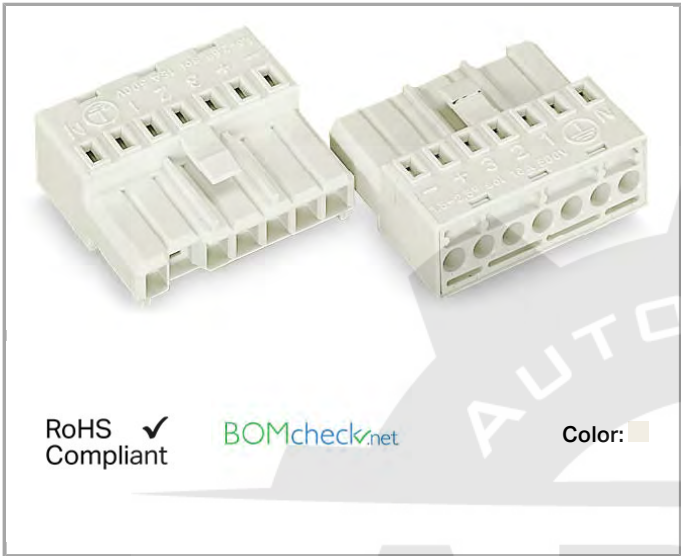

RoHS
Compliant

BOMcheck.net

Color:

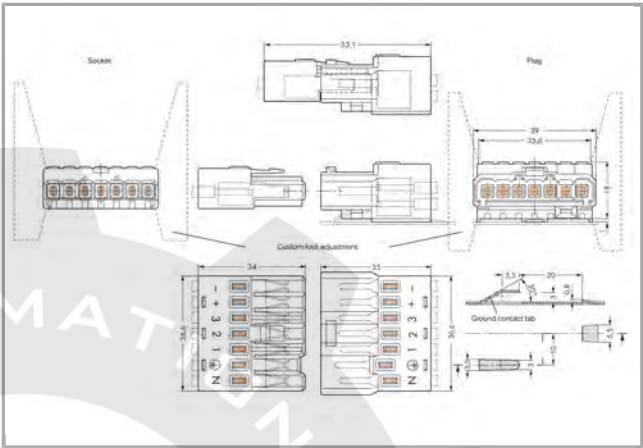

Data
Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 2)	500 V
Rated impulse voltage (III / 2)	4 kV
Rated current	16 A

Connection data

Connection technology	PUSH WIRE®
Strip length	11 12 mm / 0.43 0.47 inch
Total number of connection points	7
Number of connection types	1
Number of levels	1
No. of poles	7

Geometrical Data

Width	34 mm / 1.339 inch
Height	18 mm / 0.709 inch
Depth	39 mm / 1.535 inch

Material Data

Color	white
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	tin-plated
Fire load	0.181 MJ
Weight	13.928 g

Environmental Requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Country of origin	PL
GTIN	4044918546492
Customs Tariff No.	85369010000

Approvals / Certificates

Radio-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 61984	2156138.01
	CCA DEKRA Certification B.V.	IEC 61984	NL-47713
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 61984	2156138.01

	CCA DEKRA Certification B.V.	IEC 61984	NL-47713
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 1977	E45171- 20040225

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 267-501	URL	Download
---------------------	-----	----------

EPLAN

EPLAN Data Portal	Download
-------------------	----------

Subject to changes.