
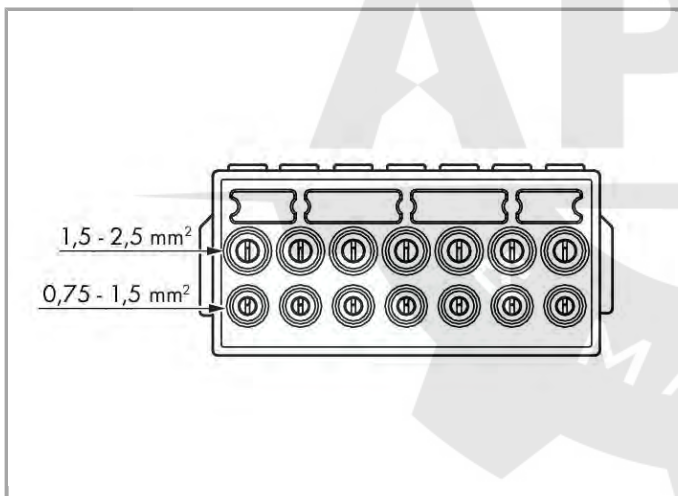
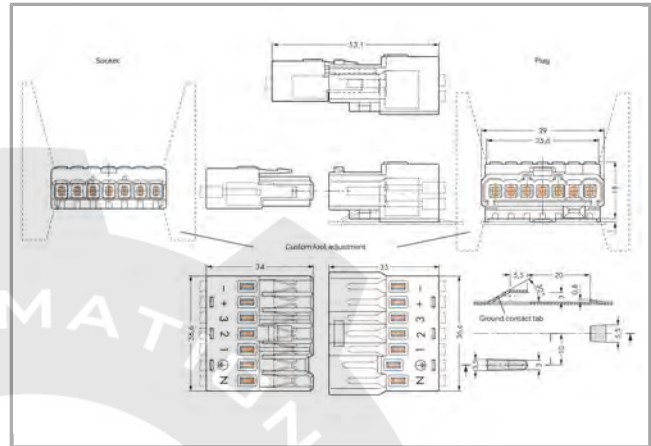


267-521

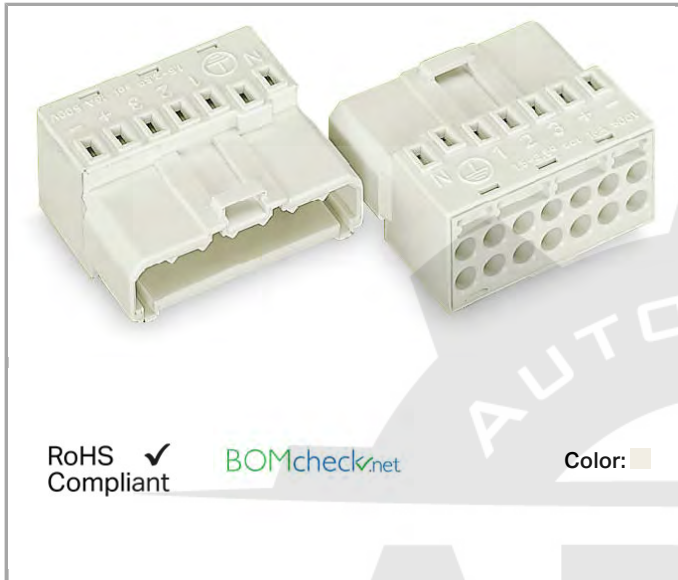

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 2)	500 V
Rated impulse voltage (III / 2)	4 kV
Rated current	16 A

Connection data

Connection type (1)	PUSH WIRE® connection
Connection technology	PUSH WIRE®
Number of connection points (connection type)	1
Solid conductor	1.5 2.5 mm² / 16 14 AWG
Strip length	11 12 mm / 0.43 0.47 inch
Connection type (2)	PUSH WIRE® connection
Connection technology 2	PUSH WIRE®
Number of connection points	1
Solid conductor (2)	0.75 1.5 mm² / 18 16 AWG
Strip length (2)	11 12 mm / 0.43 0.47 inch
Number of connection types	2
Number of levels	2

Geometrical Data

Width	35 mm / 1.378 inch
Height from the surface	18 mm / 0.709 inch
Depth	39 mm / 1.535 inch

Material Data

Color	white
Material group	I
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Clamping spring material	Chrome nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	tin-plated
Fire load	0.281 MJ
Weight	19.615 g

Environmental Requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Country of origin	PL
GTIN	4050821307914
Customs Tariff No.	85369010000

Approvals / Certificates

Radio-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 61984	2156138.01
	CCA DEKRA Certification B.V.	IEC 61984	NL-47713
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	IEC 61984	NL-47713
	CCA DEKRA Certification B.V.	EN 61984	2156138.01
	VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

Subject to changes.