




272-402_272-488

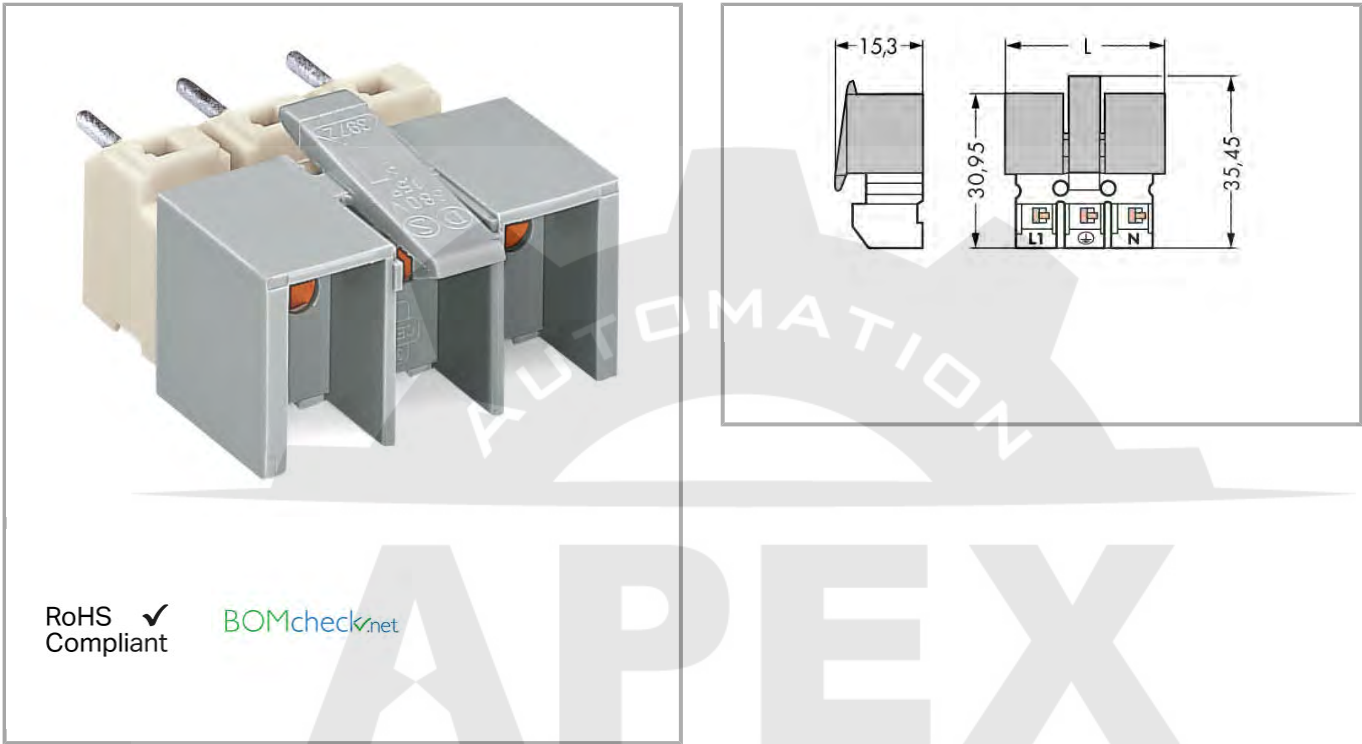

RoHS
Compliant

[BOMcheck.net](https://www.bomcheck.net)

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 2)	200 V
Rated impulse voltage (III / 2)	4 kV
Rated voltage (II / 2)	400 V
Rated impulse voltage (II / 2)	4 kV
Rated current	16 A

Connection data

Connection technology	PUSH WIRE®
Strip length	8 9 mm / 0.31 0.35 inch
Total number of connection points	4
Total number of potentials	2
Number of connection types	1
No. of poles	2

Geometrical Data

Width	23 mm / 0.906 inch
Height	15.3 mm / 0.602 inch
Depth	35.95 mm / 1.415 inch

Material Data

Color	white/gray
Fire load	0.278 MJ
Weight	8.57 g

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Country of origin	DE
GTIN	4044918406031
Customs Tariff No.	85366990990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2 No. 158	70048844

Compatible products

Strain relief plate

	Item no.: 272-537 Strain relief housing; for 272 Series; for multicore cables; 2-pole; white	272-537
--	---	---------

assembling

	Item no.: 271-702 Pins; for plate thickness 1 mm	271-702
	Item no.: 271-711 Pins; for plate thickness 1 mm	271-711
	Item no.: 271-712 Pins; for plate thickness 1.5 mm	271-712

ferrule



	Item no.: 209-151 Pin terminals; insulated; suitable for 271 and 272 Series; green	209-151
	Item no.: 209-157 Pin terminals; insulated; suitable for 271 and 272 Series; blue	209-157
	Item no.: 209-164 Pin terminals; insulated; suitable for 271 and 272 Series; natural	209-164

Downloads
Documentation

Additional Information			
Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download

CAD/CAE - Smart Data

CAD data		
3D Download 272-402/272-488	URL	Download
EPLAN		
EPLAN Data Portal		Download
WSCAD		
WSCAD Universe		Download

Subject to changes.