


272-453_272-485

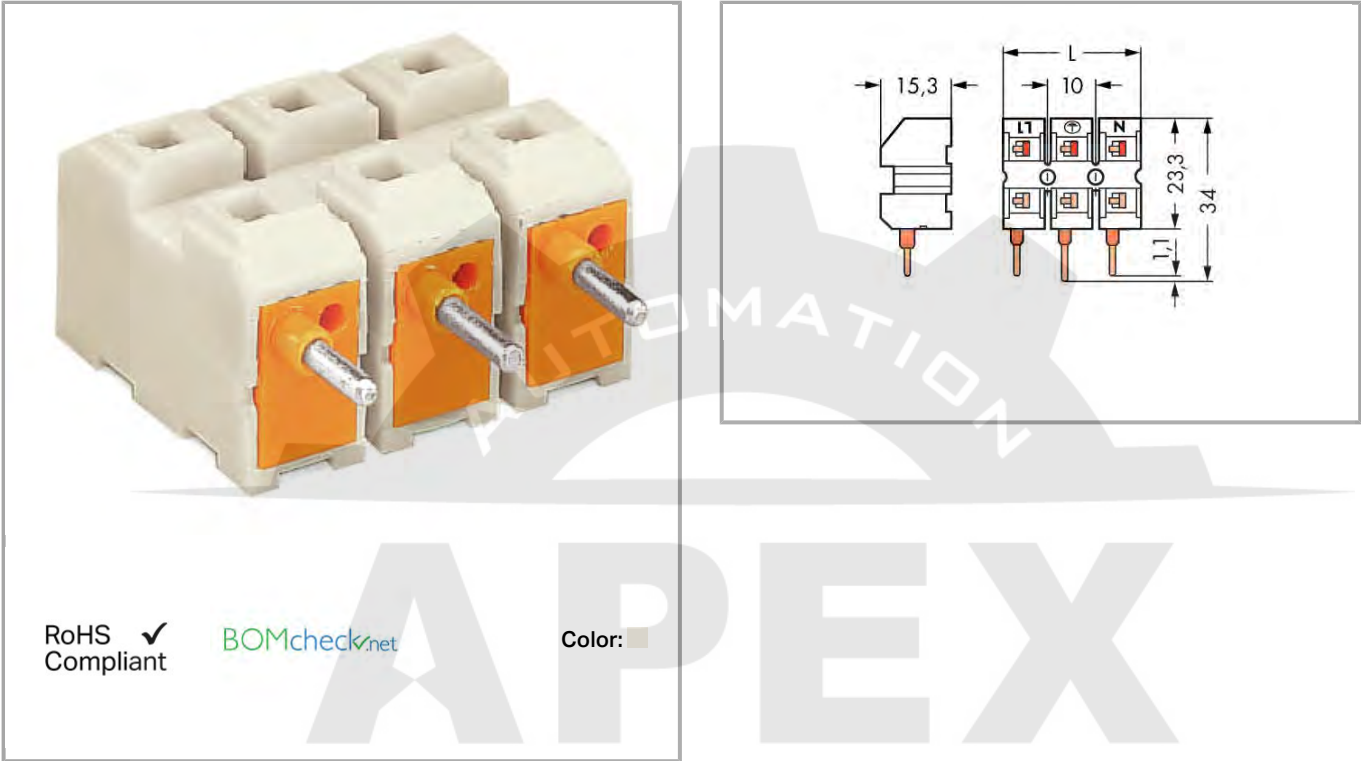

Data
Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (III / 2)	200 V
Rated impulse voltage (III / 2)	4 kV
Rated voltage (II / 2)	400 V
Rated impulse voltage (II / 2)	4 kV
Rated current	16 A

Connection data

Connection technology	PUSH WIRE®
Strip length	8 9 mm / 0.31 0.35 inch
Total number of connection points	6
Total number of potentials	3
Number of connection types	1
No. of poles	3

Geometrical Data

Width	33 mm / 1.299 inch
Height	15.3 mm / 0.602 inch
Depth	34 mm / 1.339 inch

Material Data

Color	white
Fire load	0.155 MJ
Weight	10.458 g

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Country of origin	DE
GTIN	4044918431682
Customs Tariff No.	85369010000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CSA DEKRA Certification B.V.	C22.2 No. 158	70048844

Compatible products

assembling

	Item no.: 271-702 Pins; for plate thickness 1 mm	271-702
	Item no.: 271-711 Pins; for plate thickness 1 mm	271-711
	Item no.: 271-712 Pins; for plate thickness 1.5 mm	271-712

Strain relief plate

	Item no.: 272-492 Strain relief support; for 272 Series; for multicore cables; 3-pole; with clamp; white	272-492
	Item no.: 272-494	



Strain relief housing; for insulated single conductors; 3-pole; white

272-494



Item no.: 272-497

Strain relief housing; for 272 Series; for multicore cables; 3-pole; white

272-497

ferrule



Item no.: 209-151

Pin terminals; insulated; suitable for 271 and 272 Series; green

209-151



Item no.: 209-157

Pin terminals; insulated; suitable for 271 and 272 Series; blue

209-157



Item no.: 209-164

Pin terminals; insulated; suitable for 271 and 272 Series; natural

209-164

Downloads

Documentation

Additional Information

Technical explanations

Apr 3, 2019

pdf
3.6 MB

Download

CAD/CAE - Smart Data

CAD data

3D Download 272-453/272-485

URL

Download

EPLAN

EPLAN Data Portal

Download

WSCAD

WSCAD Universe

Download

Subject to changes.