



Data sheet | Item number: 280-803/281-420

Component plug; for carrier terminal blocks; 2-pole; with rectifier diode and LED; 10 mm wide

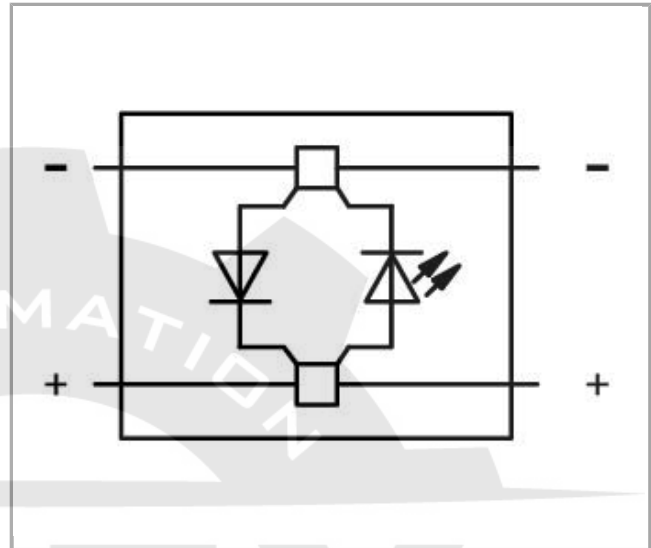

280-803/281-420

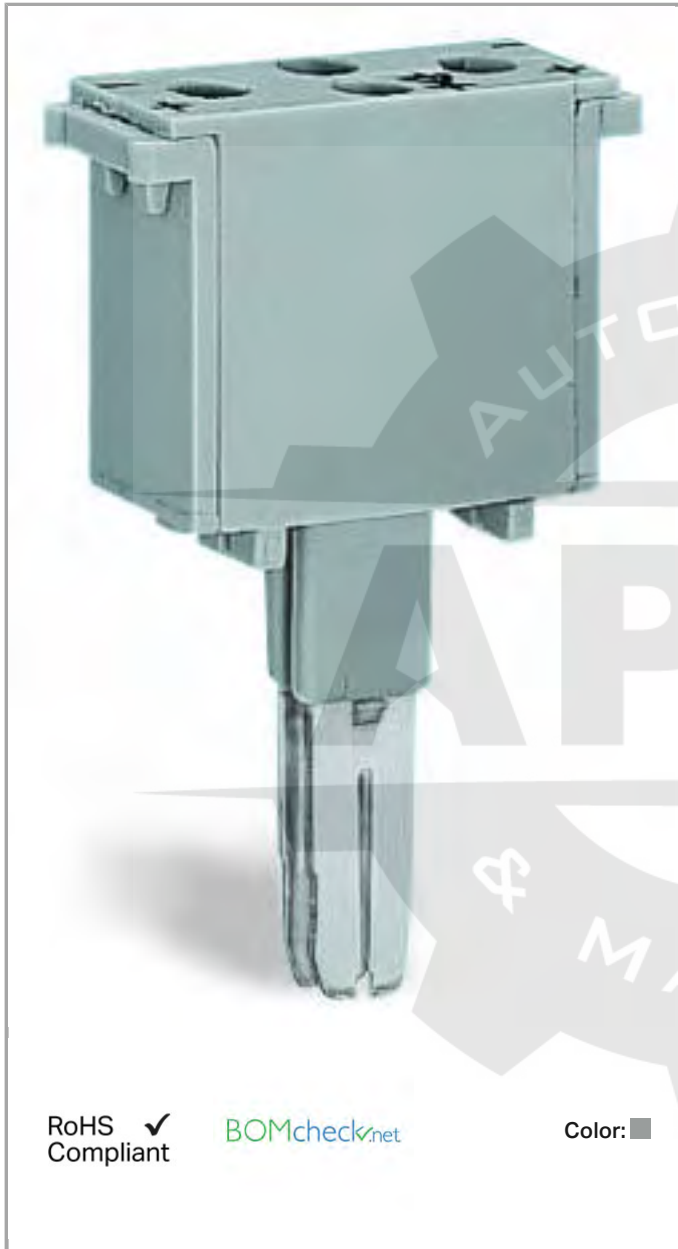

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

Data

Electrical data

Nominal voltage	250 V
Reverse voltage	1000 V

Ratings per IEC/EN 60664-1

Rated current	0.5 A
---------------	-------

Connection data

Actuation type	Operating tool
----------------	----------------

Geometrical Data

Width	10 mm / 0.394 inch
-------	--------------------

Material Data

Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load	0.089 MJ
Weight	4.632 g

Commercial data

Country of origin	DE
GTIN	4050821864974
Customs Tariff No.	85369010000

Compatible products

clamps

	Item no.: 280-101 2-conductor through terminal block; 2.5 mm ² ; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-101
	Item no.: 280-601 2-conductor through terminal block; 2.5 mm ² ; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-601
	Item no.: 280-603 4-conductor through terminal block; 2.5 mm ² ; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-603
	Item no.: 280-621 4-conductor through terminal block; 2.5 mm ² ; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-621
	Item no.: 280-633 4-conductor through terminal block; 2.5 mm ² ; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-633
	Item no.: 280-681 3-conductor through terminal block; 2.5 mm ² ; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®	280-681
	Item no.: 280-833	



4-conductor through terminal block; 2.5 mm²; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®

280-833



Item no.: 280-901
2-conductor through terminal block; 2.5 mm²; center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®

280-901

Downloads
Documentation
Bid Text

280-803/281-420	doc 24.1 kB	Download
-----------------	----------------	----------

CAD/CAE - Smart Data
CAD data

3D Download 280-803/281-420	URL	Download
-----------------------------	-----	----------

Subject to changes.