



Data sheet | Item number: 286-376

Relay module; Nominal input voltage: 24 VDC; 1 make contact; Limiting continuous current: 5 A; for switching higher DC loads; Red status indicator; Module width: 15 mm

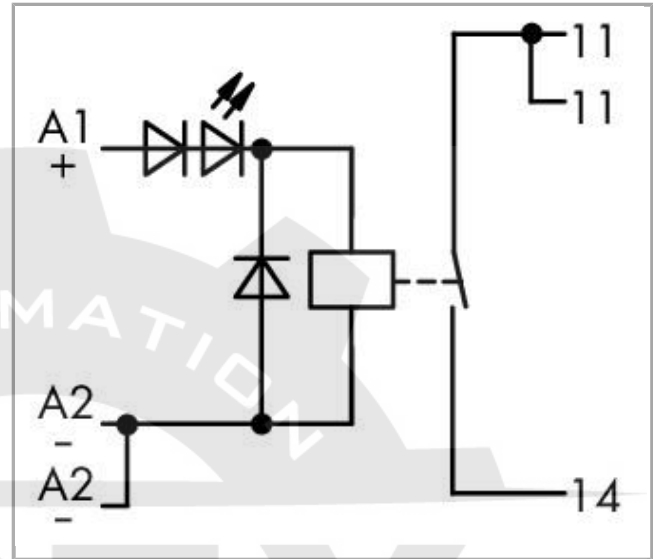


286-376

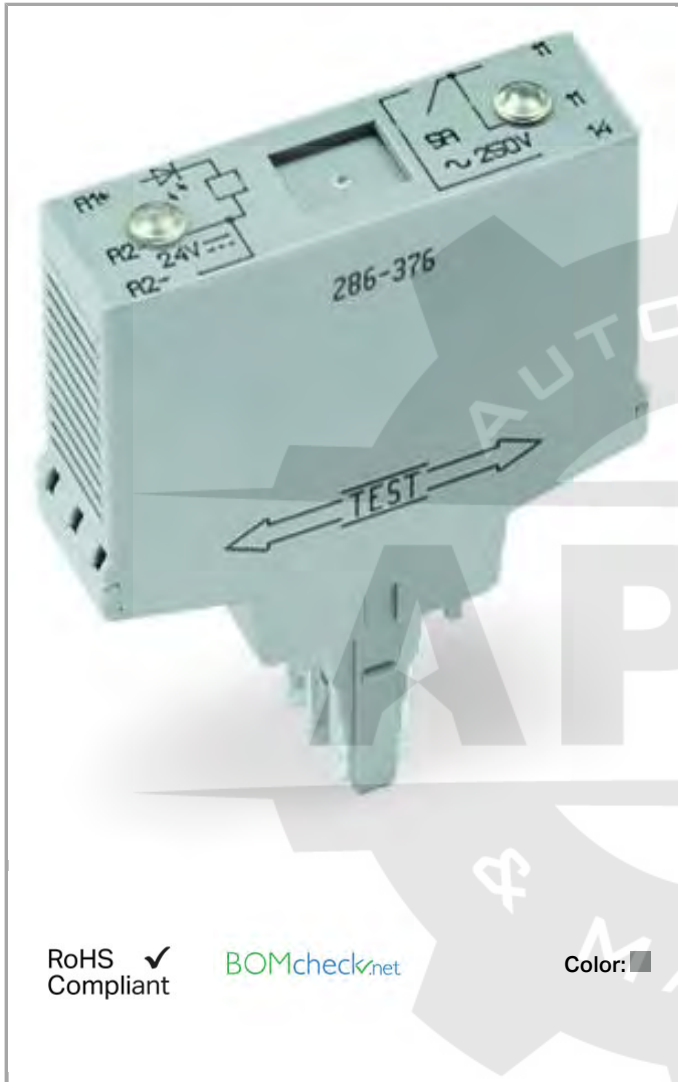

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

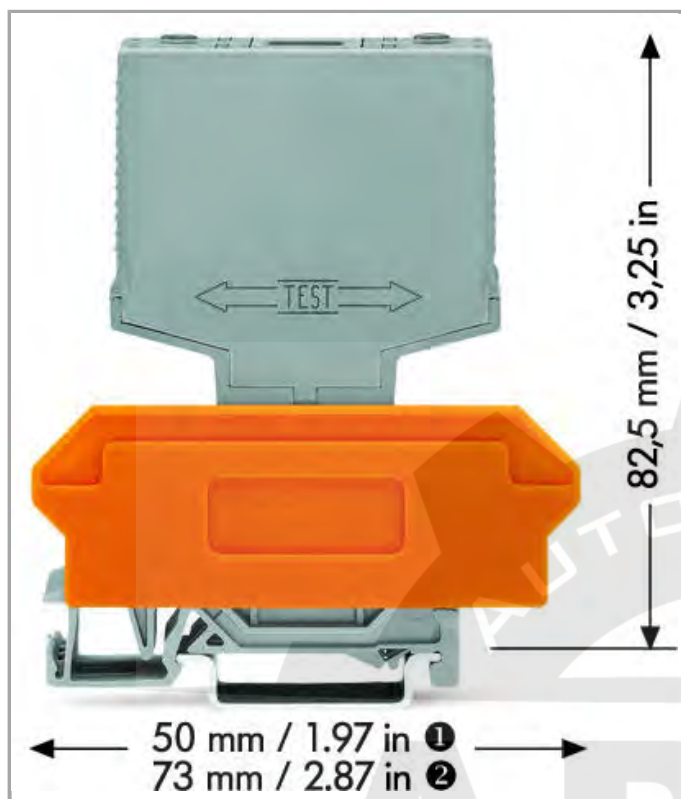

Data

Technical Data

Control circuit

Nominal input voltage U_N	DC 24 V
Input voltage range	$\pm 10 \%$
Nominal input current at U_N	20 mA

Load circuit:

Number of make contacts/switch on contacts	1
Contact material (relay)	AgNi 0.15
Limiting continuous current	5 A
Max. make current (resistive)	(AC) 14 A / 4 s
Max. switching voltage	AC 250 V
Recommended minimum load	12 V / 10 mA
Pull-in time (typ.)	9 ms
Drop-out time (typ.)	3 ms
Bounce time (typ.)	5 ms
Electrical life (N.O.; resistive load; 23 °C)	300×10^3 switching operations
Mechanical life (N.O.; resistive load; 23 °C)	20×10^6 switching operations

Safety and protection:

Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Dielectric strength, control/load circuit (AC, 1 min)	4 kVrms
Dielectric strength open contact (AC, 1 min)	2 kVrms
Protection class	IP20

Geometrical Data

Width	15 mm / 0.591 inch
Height from upper-edge of DIN-35 rail	82.5 mm / 3.248 inch
Depth	52 mm / 1.654 inch

Mechanical data

Type of mounting	Pluggable module for carrier terminal blocks
------------------	--

Material Data

Color	gray
Fire load	0.642 MJ
Weight	34.987 g

Environmental Requirements

Pollution degree	2
Surrounding air (operating) temperature at U_N	-25 ... 40 °C
Surrounding air (storage) temperature	-25 ... 70 °C

Standards and specifications

Standards/specifications	EN 60664-1
--------------------------	------------

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454717933
Customs Tariff No.	85364900990

Compatible products

Marking accessories

**Item no.: 209-701**

WSB marking card; as card; not stretchable; plain; snap-on type

209-701

**Item no.: 209-701/000-002**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-002

209-701

**Item no.: 209-701/000-005**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-005

209-701

**Item no.: 209-701/000-006**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-006

209-701

**Item no.: 209-701/000-007**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-007

209-701

**Item no.: 209-701/000-012**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-012

209-701

**Item no.: 209-701/000-017**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-017

209-701

**Item no.: 209-701/000-023**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-023

209-701

**Item no.: 209-701/000-024**

WSB marking card; as card; not stretchable; plain; snap-on type

/000-024

209-701

Downloads**Documentation****Bid Text**

286-376

Relaisbaustein

Jan 22, 2016

doc
28.7 kB

Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

Download



Subject to changes.
