



Data sheet | Item number: 286-723

Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 15 ... 30 VDC; Limiting continuous current: 4 A; 3-wire connection/high-side switching; Red status indicator; Module width: 15 mm; gray

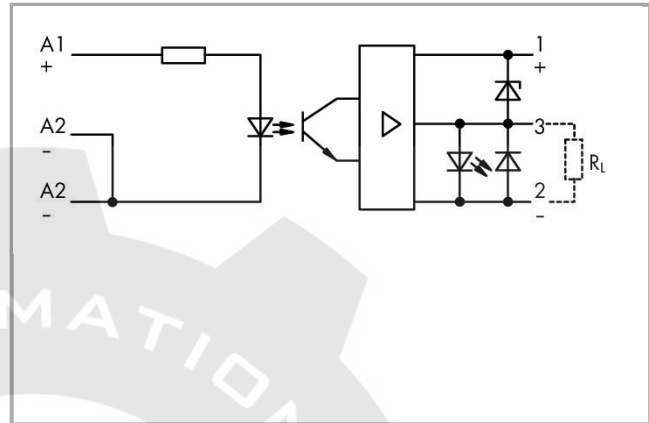


286-723

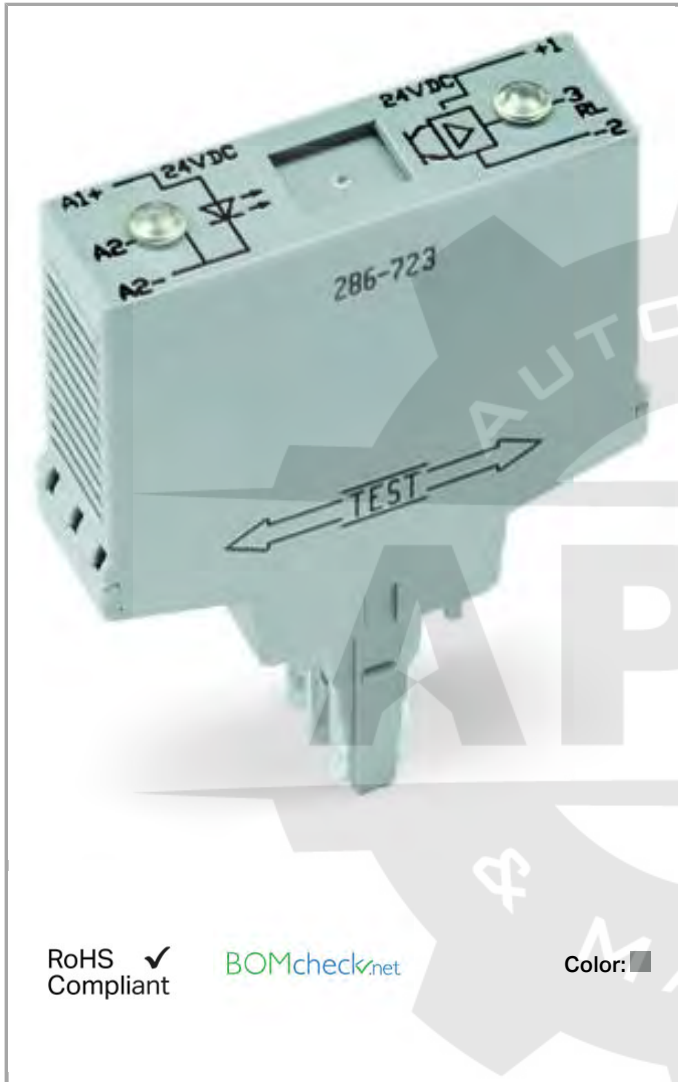

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color:

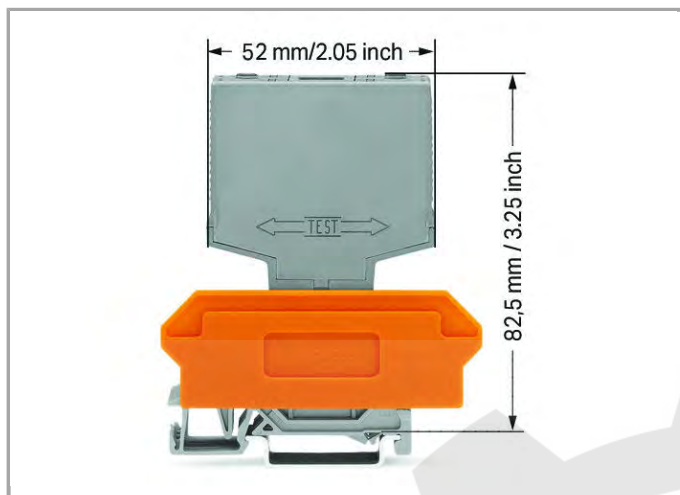

Data

Technical Data

Control circuit

Nominal input voltage U_N	DC 24 V
Input voltage range (high level)	DC 15 30 V
Nominal input current at U_N	14 mA
Input current range	7.6 15 mA

Load circuit:

Circuit type	3-conductor termination High-side switching
Limiting continuous current	4 A
Output voltage range	DC 20 30 V
Max. voltage drop at output	$\leq$ DC 1.2 V
Leakage current at nominal voltage	$\leq$ 2 μ A
Max. output (reverse current)	12 mA
Turn-on time	$\leq$ 15 μ s
Drop-out time	$\leq$ 25 μ s
Switching frequency	$\leq$ 2.5 kHz

Signaling

Status indication	LED red
-------------------	---------

Safety and protection:

Pollution degree	2
Dielectric strength, control/load circuit (AC, 1 min)	2.5 kVrms

Protection class	IP20
------------------	------

Geometrical Data

Width	15 mm / 0.591 inch
Height from upper-edge of DIN-35 rail	82.5 mm / 3.25 inch
Depth	52 mm / 2.047 inch

Mechanical data

Type of mounting	Pluggable module for carrier terminal blocks
------------------	--

Material Data

Color	gray
Fire load	0.325 MJ
Weight	26.8 g

Environmental Requirements

Pollution degree	3
Surrounding air (operating) temperature at U _N	-25 40 °C
Surrounding air (storage) temperature	-25 40 °C

Standards and specifications

Standards/specifications	EN 60664-1
--------------------------	------------

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454413682
Customs Tariff No.	85365005000

Compatible products

Marking accessories



Item no.: 209-701
 WSB marking card; as card; not stretchable; plain; snap-on type; white

209-701



Item no.: 209-701/000-002
 WSB marking card; as card; not stretchable; plain; snap-on type; white

209-701

/000-002

**Item no.: 209-701/000-005**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-005

209-701

**Item no.: 209-701/000-006**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-006

209-701

**Item no.: 209-701/000-007**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-007

209-701

**Item no.: 209-701/000-012**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-012

209-701

**Item no.: 209-701/000-017**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-017

209-701

**Item no.: 209-701/000-023**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-023

209-701

**Item no.: 209-701/000-024**

WSB marking card; as card; not stretchable; plain; snap-on type; white

/000-024

209-701

General accessories**Item no.: 280-609**Terminal block for pluggable modules; 12-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

280-609

**Item no.: 280-619**Terminal block for pluggable modules; 6-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

280-619

**Item no.: 280-763**Terminal block for pluggable modules; 12-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

280-763

Downloads**Documentation****Bid Text**

286-723

Optokoppler

Mar 9, 2016

doc
26.1 kB

Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

Download

CAD/CAE - Smart Data

WSCAD

WSCAD Universe

[Download](#)



Subject to changes.