
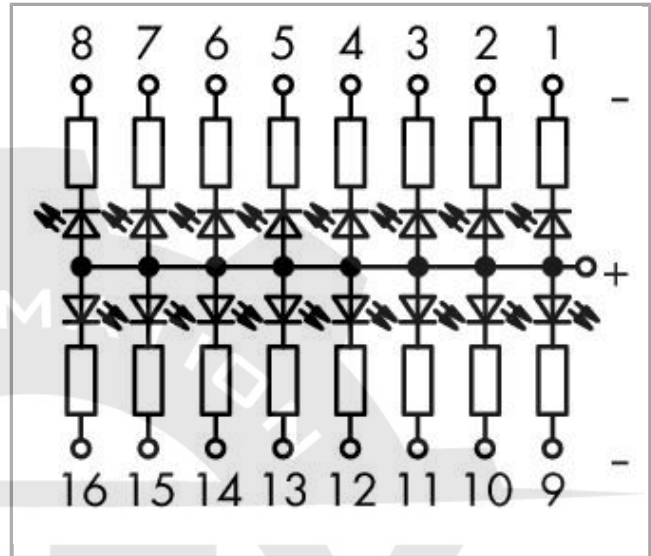
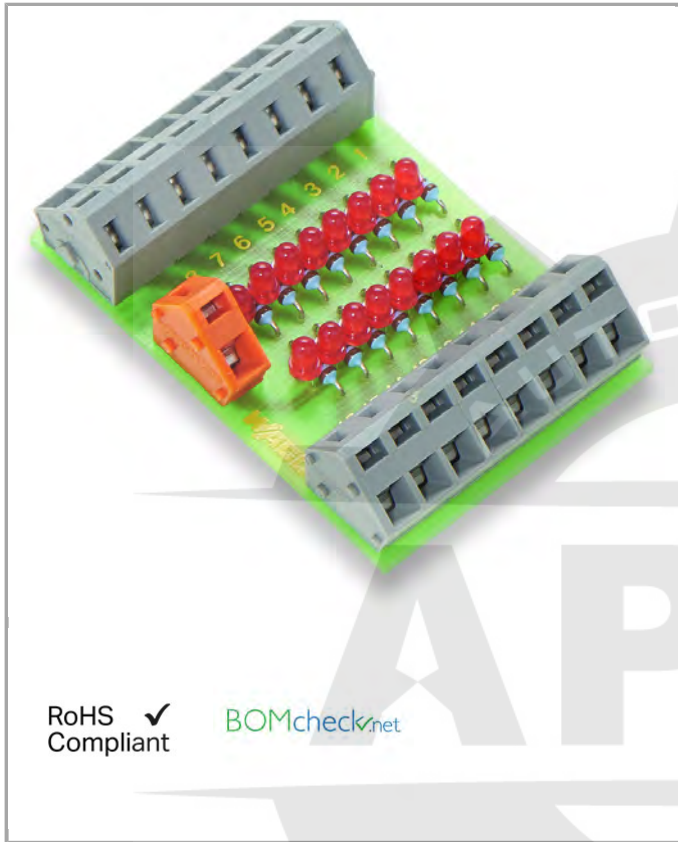


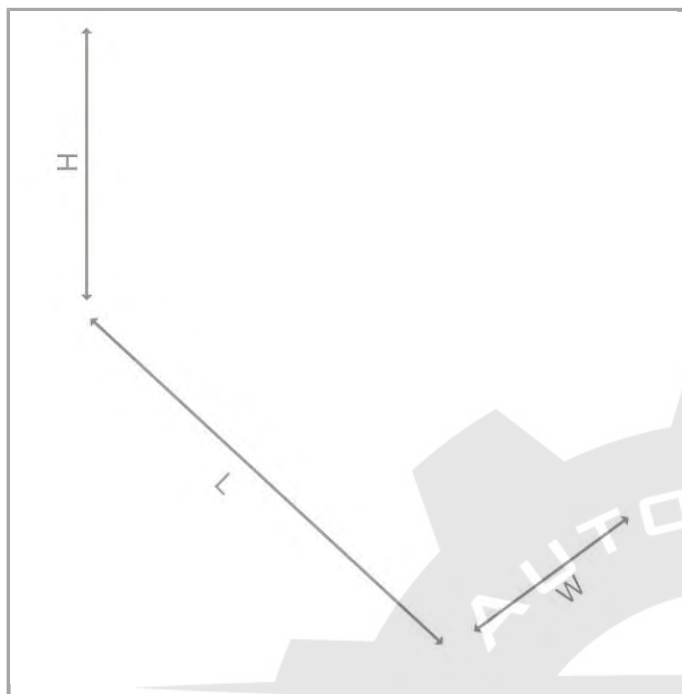

RoHS ☒ Compliant

BOMcheck.net

**Data****Electrical data**

Nominal operating voltage	DC 24 V
Operating voltage	DC 20 ... 26 V
Current consumption at supply voltage	≤ 5.6 mA (per LED)

Connection data

Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG

Geometrical Data

Width	47 mm / 1.85 inch
Height from upper-edge of DIN-35 rail	31.5 mm / 1.24 inch
Depth	65.5 mm / 2.579 inch

Mechanical data

Type of mounting	Mounting on carrier rail via carrier rail adapter
Housing design	PCB

Material Data

Fire load	0 MJ
Weight	26.24

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 40 °C
---	---------------

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454495558
Customs Tariff No.	85369010000

Compatible products

General accessories

	Item no.: 288-001 Mounting carrier	288-001
	Item no.: 288-002 Universal mounting foot; snap-fit type; suitable for DIN 15, 35 and 32 rails	288-002

Downloads

Documentation

Bid Text

289-202	Jan 15, 2016	doc 25.1 kB	Download
Interface-Bausteine mit Sonderfunktionen			

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

Subject to changes.