
Data sheet | Item number: 289-446

Interface Module; with D-subminiature male connector; 15-pole; for mating connectors with solder connection; Vertical mounting



289-446

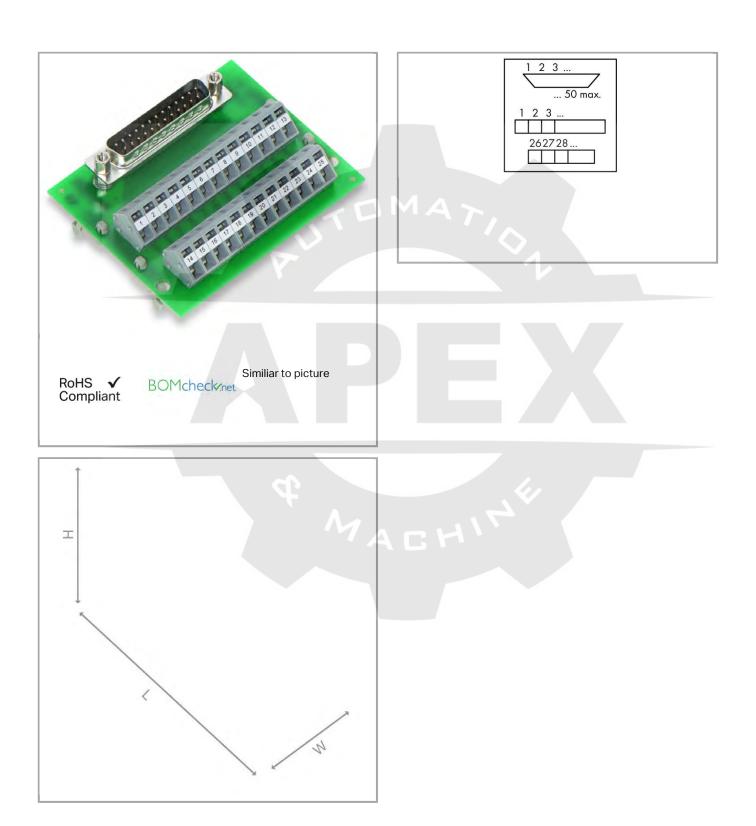

Data sheet | Item number: 289-446

289-446



Data

Electrical data

| Operating voltage | ≤ AC 30 V; ≤ DC 50 V |
|---------------------------|----------------------|
| Nominal current | 1 A |
| Contact resistance (max.) | $30\text{m}\Omega$ |

Safety and protection:

| Rated voltage | 50 V |
|--------------------------|---|
| Rated impulse voltage | 0.8 kV |
| Pollution degree | 2 |
| Protection class | IP00* |
| Note on protection class | * Notice!Live conductors! Protection against direct contact must be provided by the equipment builder, e.g., using a WAGO 709 Series cover (see Accessories) or a similar cover. The installation requirements for the particular application must be observed. |

Connection data

| No. of poles | 15 |
|--------------------------------|--------------------------------|
| Connection type (1) | System |
| No. of poles 1 | 15 |
| Pluggable connector | D-subminiature; male connector |
| For mating connectors | With solder connection |
| Mating direction | Vertical |
| Pull relief | Stud bolts UNC 4-40 |
| Connection type (2) | Field |
| No. of poles 2 | 15 |
| Design 2 | PCB terminal blocks, 2-row |
| Connection technology 2 | CAGE CLAMP [®] |
| WAGO terminal 2 | WAGO 236 Series |
| Solid conductor (2) | 0.08 2.5 mm² / 28 12 AWG |
| Strip length (2) | 5 6 mm / 0.2 0.24 inch |
| Note (conductor cross-section) | 12 AWG: THHN, THWN |
| Performance level | 2 / 200 mating cycles |
| | |

Geometrical Data

| Width | 53.5 mm / 2.106 inch |
|---------------------------------------|----------------------|
| Height from upper-edge of DIN-35 rail | 19 mm / 0.748 inch |
| Depth | 63.5 mm / 2.5 inch |

Data sheet | Item number: 289-446

289-446



Mechanical data

| Type of mounting | DIN-35 rail |
|------------------|------------------------|
| Housing design | PCB with mounting feet |

Material Data

| Contact material (pluggable connector) | Au over Ni |
|--|------------|
| Fire load | 0 MJ |
| Weight | 36.1 g |

Environmental Requirements

| Surrounding air (operating) temperature | -20 50 °C |
|---|------------------------|
| Surrounding air (storage) temperature | -40 70 °C |
| Relative humidity | ≤ 85% (non condensing) |

Commercial data

| Product Group | 6 (Interface Electronics) |
|--------------------|---------------------------|
| Country of origin | DE |
| GTIN | 4045454413545 |
| Customs Tariff No. | 85369010000 |

Compatible products

assembling

| 1 | Item no.: 709-153 Cover; Type 1; suitable for cover carrier, type 1; 1 m long | 709-153 |
|-------|--|---------|
| | Item no.: 709-167 Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks | 709-167 |
| tools | | |
| 1 | Item no.: 210-720 Operating tool with partially insulated shaft; Type 2, blade (3.5×0.5) mm | 210-720 |

Downloads

Documentation

Additional Information

| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf | Download |
|--|---------|----------|----------|
| | | 265.8 kB | |

289-446



CAD/CAE - Smart Data

CAD data

3D Download 289-446 URL Download



Subject to changes.