


Picture differs from the item.


Similar to picture

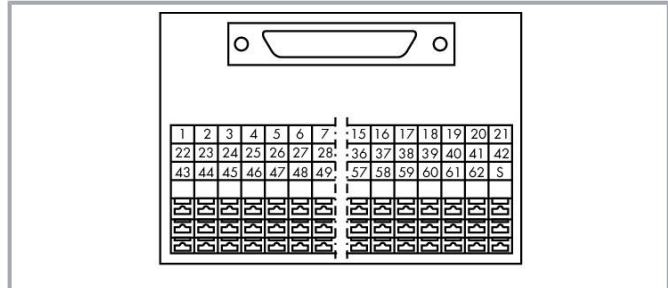

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

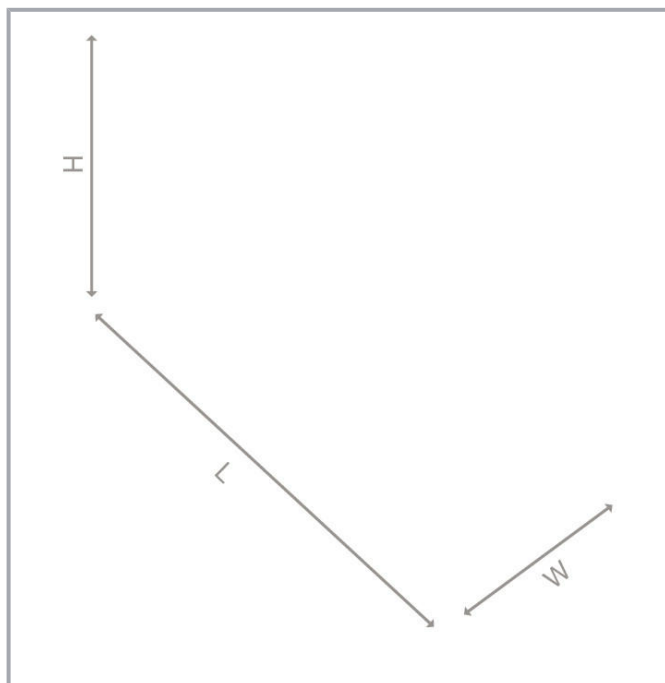

Data

Electrical data

Operating voltage	\leq AC/DC 125 V
Contact resistance (max.)	15 m Ω

Connection data

Solid conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inch

Physical data

Width	79 mm / 3.11 inch
Height from upper-edge of DIN-rail	62 mm / 2.441 inch
Depth	85 mm / 3.346 inch

Environmental requirements

Surrounding air temperature (operation)	-20 ... 55 °C
Surrounding air temperature (storage)	-40 ... 70 °C
Relative humidity	\leq 85% (non-condensing)

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Commercial data

Product Group	6 (Interface Electronics)
Packaging type	BOX
Country of origin	DE
Customs tariff number	8536904000

Downloads

Documentation

Instruction Leaflet

pdf
1.3 MB

Download

CAD files

CAE data

EPLAN Data Portal 289-597	URL	Download
WSCAD Universe 289-597	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-597 Interface module; 2,50 mm ²	URL	Download
--	-----	----------


Installation Notes

Inserting a conductor


Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

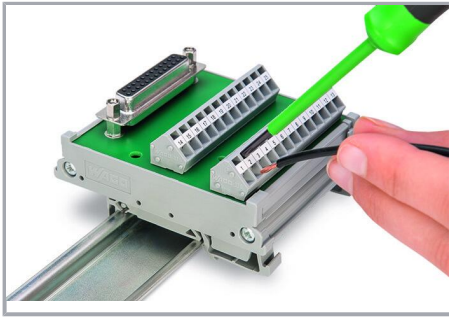


Conductor termination – screwdriver
actuation parallel to conductor entry

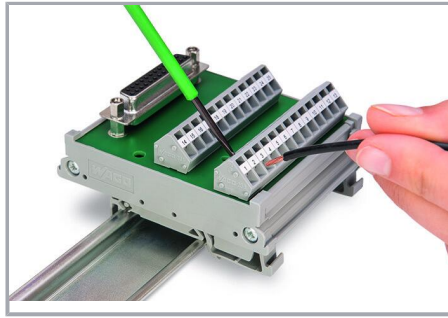


Conductor termination – screwdriver
actuation perpendicular to conductor entry

Installation

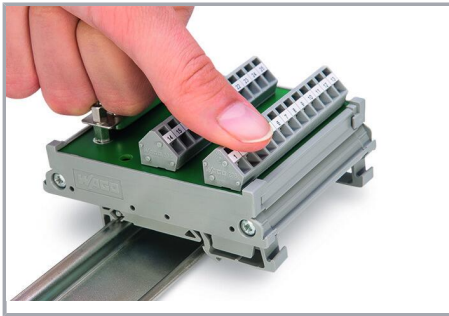

Snapping a module onto DIN-rail.

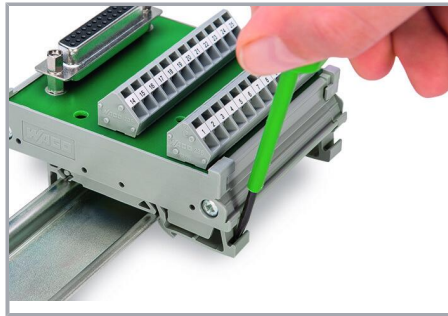

Removing a module from the DIN-rail.

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.