



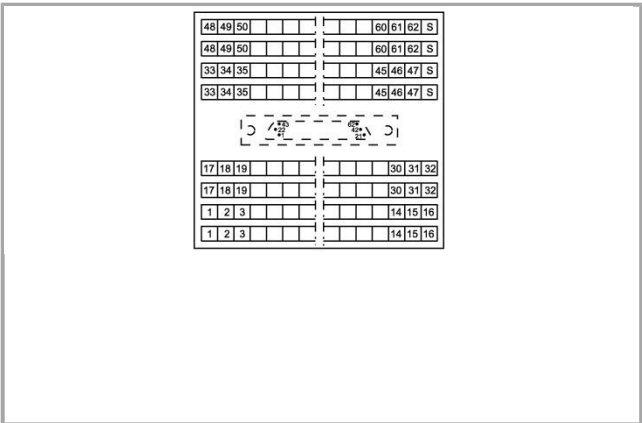

289-822

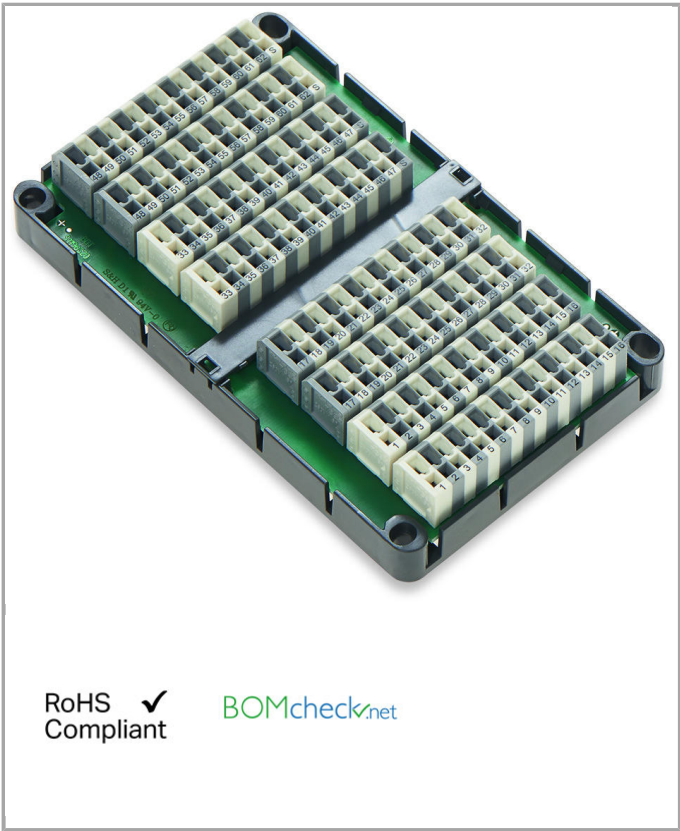

RoHS
Compliant

✓

BOMcheck.net

Data

Electrical data

Operating voltage	≤ AC/DC 125 V
Nominal current	1 A
Contact resistance (max.)	10 mΩ
Specialty functions	With shield connection

Safety and protection:

Rated voltage	125 V
Rated impulse voltage	0.8 kV
Pollution degree	2
Protection class	IP20

Connection data

No. of poles	62
--------------	----



Connection type (1)	System
No. of poles 1	62
Pluggable connector	HD-subminiature; male connector
Mating direction	Vertical
Pull relief	Stud bolts UNC 4-40
Connection type (2)	Field
No. of poles 2	64
Connection technology 2	CAGE CLAMP®
WAGO terminal 2	WAGO 739 Series
Solid conductor (2)	0.08 ... 1.5 mm² / 28 ... 14 AWG
Strip length (2)	5 ... 6 mm / 0.2 ... 0.24 inch
Performance level	2 / 400 mating cycles

Geometrical Data

Width	80 mm / 3.15 inch
Height	27 mm / 1.062 inch
Depth	132 mm / 5.197 inch

Mechanical data

Type of mounting	Module for 19" racks
Housing design	Module for 19" racks

Material Data

Contact material (pluggable connector)	Au over Ni
Fire load	0 MJ
Weight	151.339 g

Environmental Requirements

Surrounding air (operating) temperature	-20 ... 55 °C
Surrounding air (storage) temperature	-40 ... 70 °C

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454591915
Customs Tariff No.	85369010000



Downloads

Documentation

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 289-822	URL	Download
---------------------	-----	----------

Subject to changes.