


Data sheet | Item number: 706-100/1303-200

Connection cable; 14-pole; Pluggable connector per DIN 41651; open-ended; Length: 2 m; Conductor cross-section: 0.14 mm²; UR components, 857 Series



706-100/1303-200

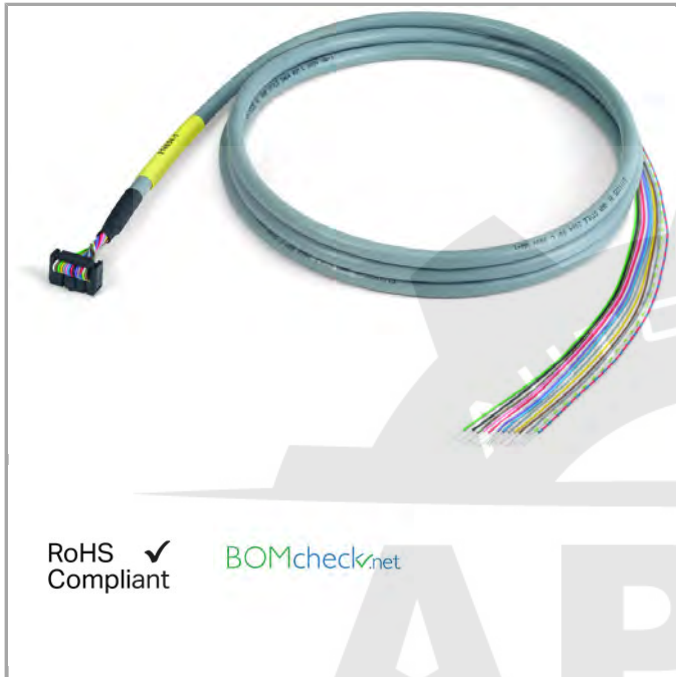

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Color coding acc. to DIN VDE 47100		14-pole connector
		Contact number
white		1
brown		2
green		3
yellow		4
grey		5
pink		6
blue		7
red		8
black		9
violet		10
grey/pink		11
red/blue		12
white/green		13
brown/green		14

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Operating voltage	≤ DC 35 V
Max. current per conductor	1 A

Safety and protection:

Protection class	IP20
------------------	------

Connection data

No. of poles	14
Connection type (1)	System
No. of poles 1	14
Pluggable connector	Pluggable connector per DIN 41651; female connector
Connection type (2)	Open End
No. of poles 2	14
Type of cable	LiYY
Cross section of single conductor	0.14 mm ²
Color coding	per DIN VDE 47100

Geometrical Data

Cable length	2 m
--------------	-----

Material Data

Weight	199 g
--------	-------

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
---	---------------

Commercial data

Product Group	30 0
Country of origin	FR
GTIN	4050821452423
Customs Tariff No.	85444290900

Compatible products

transfer module



Item no.: 857-981
 Interface adapter; 14-pole; High-side switching input

857-981



Item no.: 857-982
 Interface adapter; 14-pole; High-side switching output

857-982

Downloads

Documentation

Bid Text

706-100/1303-200	Mar 9, 2016	doc	Download
WAGO-Interface-Kabel		26.1 kB	

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB

[Download](#)



Subject to changes.
