


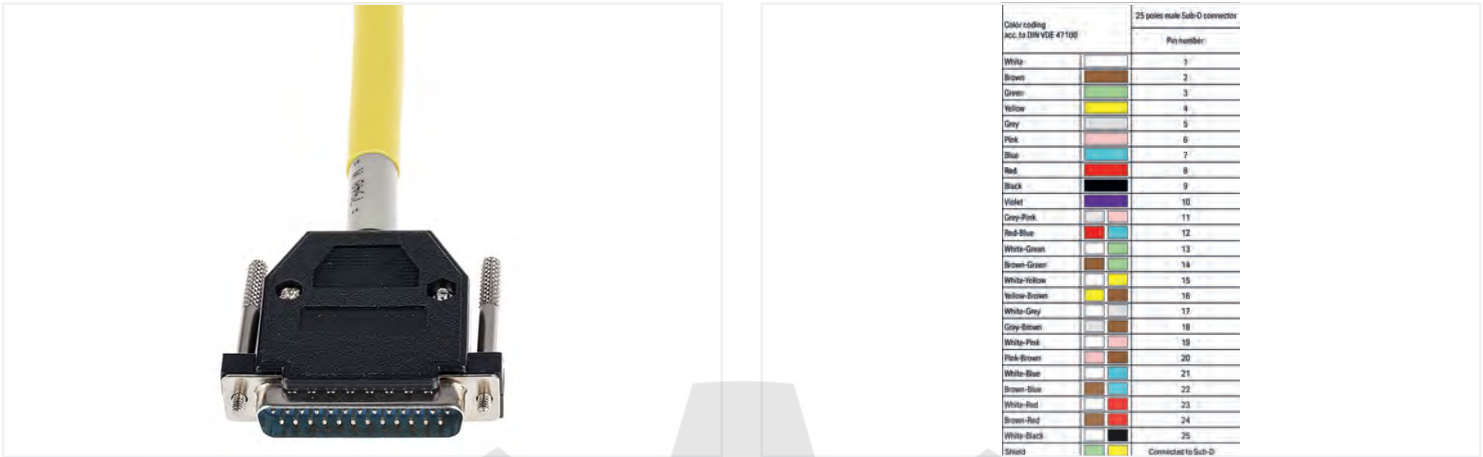

Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage

≤ AC/DC 35 V

Current per wire (max.)

2 A

Connection data				
Cable type	LiYCY		Connection 1	
Color code	per DIN VDE 47100			
			Connector	D-subminiature male connector
			Pole number 1	25
			Connection type 1	System
			Wire cross-section	0.25 mm²
			Connection type	D-subminiature

Connection 2

Connector 2

open-ended

Connection type 2

open-ended

Physical data

Cable length

3 m



Material Data	
Fire load	0 MJ
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation at U _N)	-20 ... +50 °C

Commercial data	
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821835486
Customs tariff number	85444290900

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
706-100/525-300

↓