


**Data sheet | Item number: 706-100/615-200**

Connection cable; 15-pole; with solder pin; Female connector; open-ended;  
Length: 2 m; Conductor cross-section: 0.25 mm²

[www.wago.com/706-100\\_615-200](http://www.wago.com/706-100_615-200)

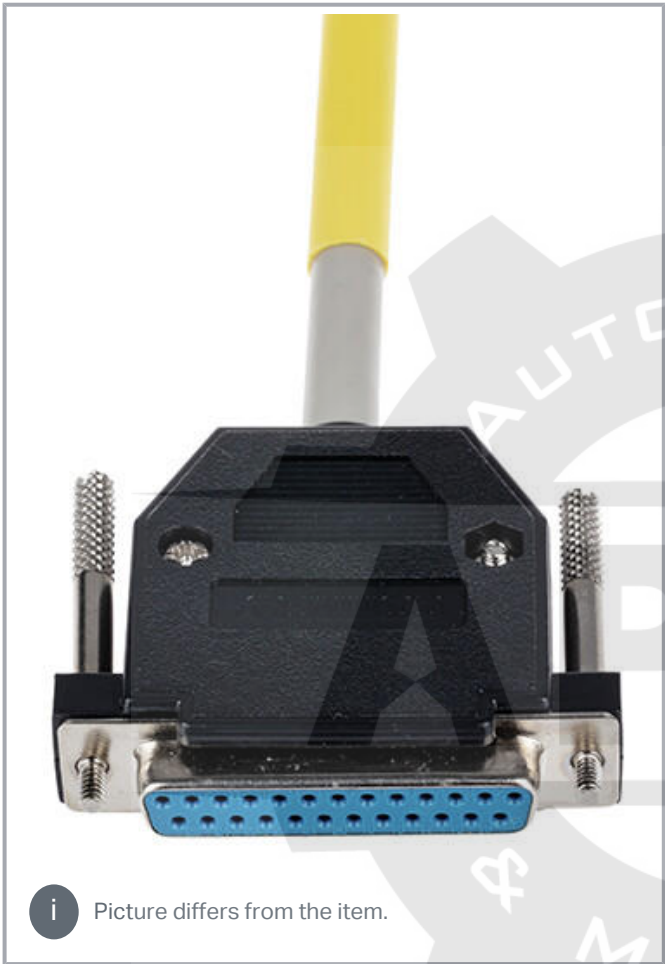

 Picture differs from the item.

**Item description**

**Note:**  
When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

**Data**

**Electrical data**

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

## Connection data

Pole No.	15
Connection type (1)	System
Pole number 1	15
Pluggable connectors	D-sub female connector
Connection type 2	Open-ended
Cable type	LiYCY
Wire cross-section	0.25 mm <sup>2</sup>
Color code	per DIN VDE 47100

## Physical data

Cable length	2 m
--------------	-----

## Material data

Weight	1.1 g
--------	-------

## Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

## Commercial data

Packaging type	BOX
GTIN	4050821835622

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 706-100/615-200	URL	Download
Connection cable; 15-pole; with solder pin; Female connector; open-ended; Length: 2 m; Conductor cross-section: 0.25 mm <sup>2</sup>		

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.