


Data sheet | Item number: 706-100/650-300

Connection cable; 50-pole; with solder pin; Female connector; open-ended;
Length: 3 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-100_650-300

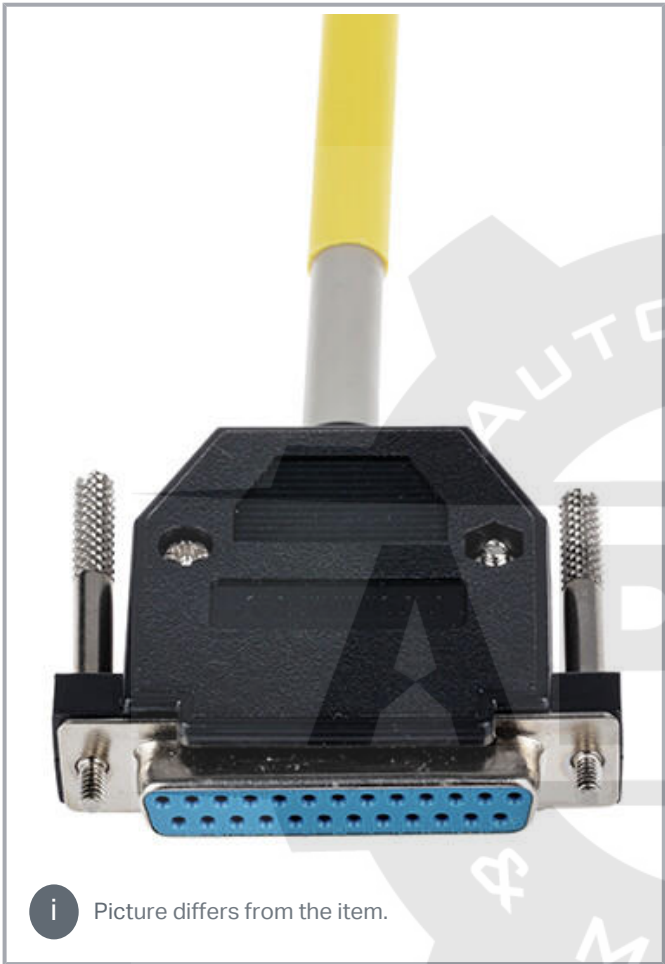

 Picture differs from the item.

Item description

Note:
When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Data
Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Connection data

Pole No.	50
Connection type (1)	System
Pole number 1	50
Pluggable connectors	D-sub female connector
Connection type 2	Open-ended
Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	1449 g
--------	--------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Packaging type	bag
Country of origin	FR
GTIN	4055143976718
Customs tariff number	8544429090

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/650-300	URL	Download
Connection cable; 50-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.