


Data sheet | Item number: 706-150/314-200

Connection cable; 14-pole; Pluggable connector per DIN 41651; 14-pole;
Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section:
0.14 mm²

www.wago.com/706-150_314-200

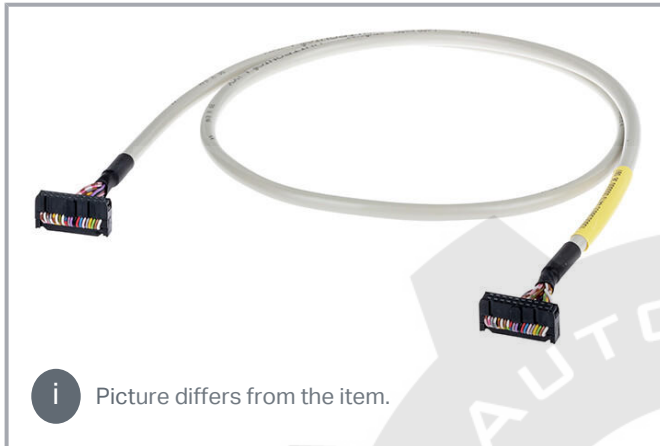

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Pole No.	14
Connection type (1)	System
Pole number 1	14
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	14
Connector 2	Pluggable connector per DIN 41651; Female connector
Cable type	LiYY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Physical data

Cable length	2 m
--------------	-----

Material data

Weight	156 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Packaging type	bag
Country of origin	FR
GTIN	4055143976725
Customs tariff number	8544429090

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-150/314-200	URL	Download
Connection cable; 14-pole; Pluggable connector per DIN 41651; 14-pole; Pluggable connector per DIN 41651; Length: 2 m; Conductor cross-section: 0.14 mm²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.