


Data sheet | Item number: 706-2300/201-100

System cable; for Siemens S7-300; 8 digital outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-2300_201-100

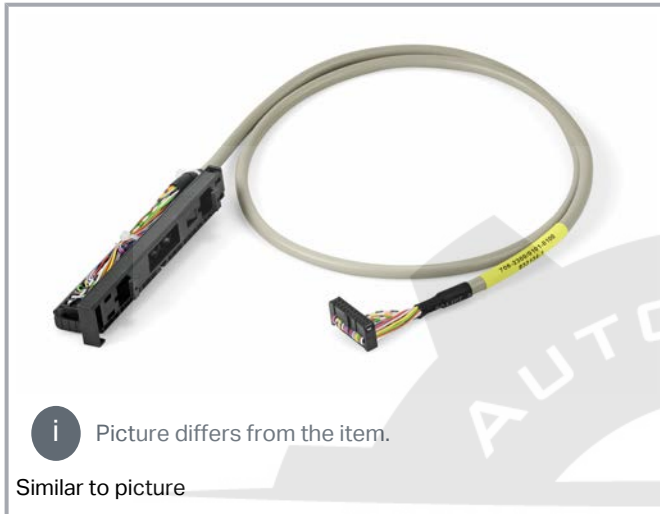

 Picture differs from the item.

Similar to picture

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Inputs/outputs	8 digital outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 322-1BF01-0AA0 6ES7 322-8BF00-0AB0
Connection type (1)	System
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	10

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Connector 2	Siemens 6ES7-392-1BJ00-0AA0
Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	97 g
--------	------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 0
Country of origin	FR
GTIN	4045454880200
Customs tariff number	85444290900

Optional accessories

Interface module

	Item no.: 289-611 Interface module; Pluggable connector per DIN 41651; 10-pole; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm ²	www.wago.com/289-611
	Item no.: 704-2003 Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 10-pole; 8-channel digital input or output; 3-wire connection; in mounting carrier	www.wago.com/704-2003
	Item no.: 704-5003 Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 10-pole; 8-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm ²	www.wago.com/704-5003
	Item no.: 704-5013 Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 10-pole; 8-channel relay output; 1 changeover contact; Triple-deck PCB terminal blocks; with manual operation; in mounting carrier; 2,50 mm ²	www.wago.com/704-5013

Downloads

Documentation

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

**Bid Text**

706-2300/201-100	Feb 19, 2019	xml	Download
X81 - Datei		3.2 kB	

706-2300/201-100	Feb 9, 2015	doc	Download
doc - Datei		26.1 kB	

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	Download
		265.8 kB	

System Description

WAGO System Wiring, Selection Guide		pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.		545.9 kB	

CAD files**CAE data**

WSCAD Universe 706-2300/201-100	URL	Download
WSCAD Universe 706-2300/201-100	URL	Download

Environmental Product Compliance**Compliance Search**

Environmental Product Compliance 706-2300/201-100	URL	Download
System cable; for Siemens S7-300; 8 digital outputs; Length: 1 m; Conductor cross-section: 0.14 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.