


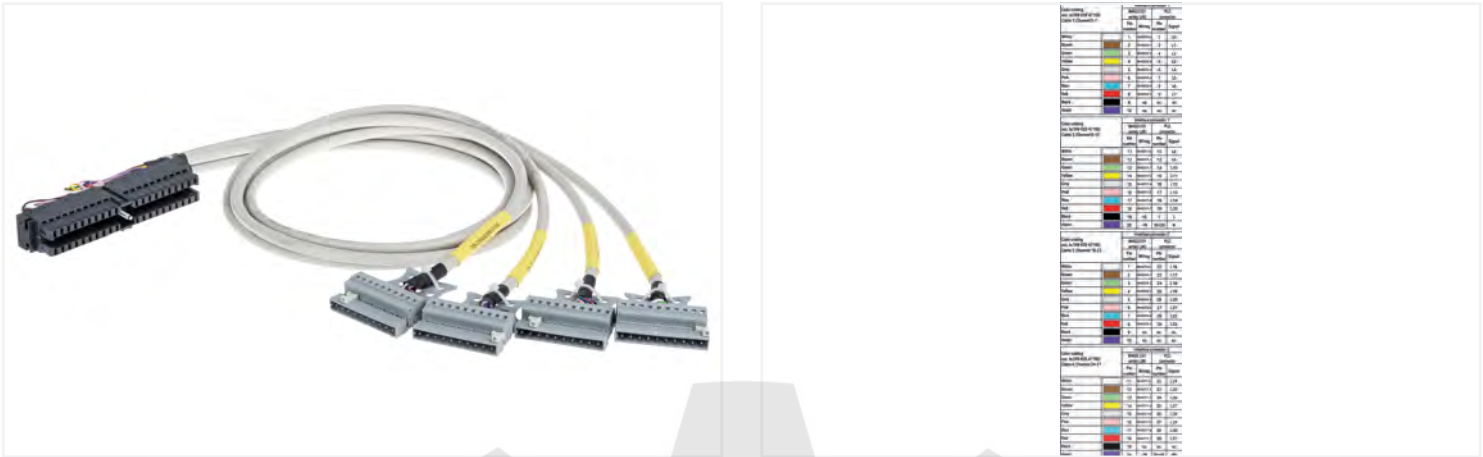

Notes	
Note	If less than 3 channels are used simultaneously, the maximum current per conductor is 2 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L. If more than 3 channels are used simultaneously, the maximum current per conductor is 0.75 A and up to 5 A (30°C ambient temperature) or 3.5 A (50°C ambient temperature) at pins N/L.

Electrical data	
Inputs/outputs	2 x 8 digital inputs or outputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Compatibility	
Siemens	
Siemens S7-300	6ES7 321-1CH00-0AA0 6ES7 321-1EL00-0AA0 6ES7 322-5GH00-0AB0

Connection data			
Cable type	LiYY	Connection 1	
Color code	per DIN VDE 47100	Connector	WAGO 231 Series
		Pole number 1	10
		Connection type 1	System
		Wire cross-section	0.34 mm²
Connection 2		Connection 3	
Connector 2	WAGO 231 Series	Connector 3	WAGO 231 Series
Pole number 2	10	Pole number 3	10
Connection type 2	System	Connection type 3	System



Connection 4	
Connector 4	WAGO 231 Series
Pole number 4	10
Connection type 4	System

Connection 5	
Connector 5	Siemens 6ES7-392-1BM00-0AA0
Pole number 5	40
Connection type 5	System

Physical data	
Cable length	1 m

Material Data	
Fire load	0 MJ
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation at U _N)	-20 ... +50 °C

Commercial data	
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	Box
GTIN	4045454881948
Customs tariff number	85444290900

Downloads	
-----------	--

Environmental Product Compliance	
----------------------------------	--

Compliance Search	
Environmental Product Compliance 706-2300/306-100	

Documentation	
---------------	--

System Description	
WAGO System Wiring, Selection Guide	pdf 533.15 KB