


Data sheet | Item number: 706-2300/400-300

System cable; for Siemens S7-300; 8 analog inputs; Length: 3 m; Conductor cross-section: 0.25 mm²



706-2300_400-300

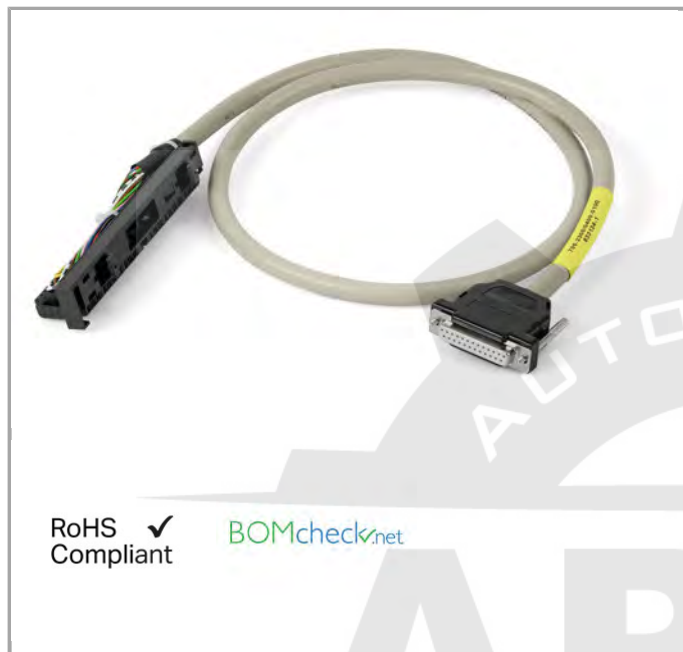

RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Data

Electrical Data

In-/Outputs	8 analog inputs
Operating voltage	≤ AC/DC 35 V
Max. current per conductor	2 A

Safety and protection:

Protection class	IP20
------------------	------

Connection data

Connection type (1)	System
Pluggable connector	Siemens 6ES7-392-1BJ00-0AA0
Connection type (2)	System
No. of poles 2	25
Pluggable connector 2	D-sub; female connector

Type of cable	Li YCY
Cross section of single conductor	0.25 mm²
Color coding	per DIN VDE 47100

Geometrical Data

Cable length	3 m
--------------	-----

Material Data

Weight	608 g
--------	-------

Environmental Requirements

Surrounding air (operating) temperature	-20 50 °C
---	-----------

Commercial data

Product Group	30 ()
Country of origin	FR
GTIN	4045454875046
Customs Tariff No.	85444290900

Compatible products

transfer module



Item no.: 704-8013

Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB disconnect terminal blocks; in mounting carrier

704-8013

Downloads

Documentation

Bid Text

706-2300/400-300 WAGO-Interface-Kabel	Oct 2, 2014	doc 26.1 kB	Download
--	-------------	----------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------



Subject to changes.
