


Data sheet | Item number: 706-4769/301-300

System cable; for Rockwell Compact Logix; 2 x 16 digital inputs or outputs;
Length: 3 m; Conductor cross-section: 0.14 mm²

www.wago.com/706-4769_301-300

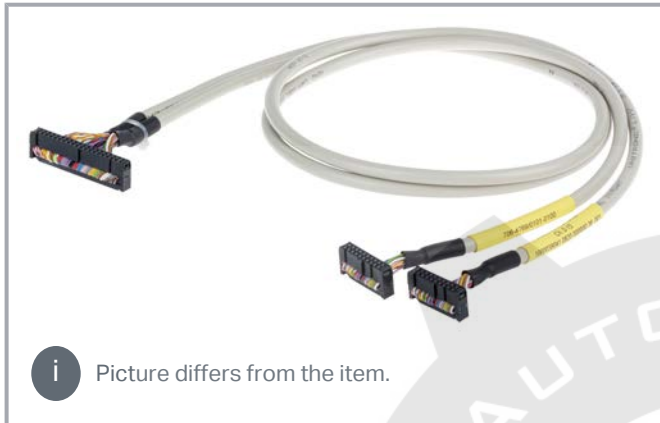

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical data

Inputs/outputs	2 x 16 digital inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Compatible PLC Modules	Rockwell Compact Logix
Compatible PLC I/O Card Types	1769 - OB32T
Connection type (1)	System
Pole number 1	20
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	20
Connector 2	Pluggable connector per DIN 41651; Female connector
Connection type (3)	System

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Pole number 3	40
Connector 3	DIN 41651 connector; female connector
Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	3 m
--------------	-----

Material data

Weight	585 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Packaging type	bag
Country of origin	FR
GTIN	4055143984577
Customs tariff number	8544429090

Downloads**Documentation****System Description**

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

[Download](#)**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 706-4769/301-300	URL	Download
System cable; for Rockwell Compact Logix; 2 x 16 digital inputs or outputs; Length: 3 m; Conductor cross-section: 0.14 mm ²		

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

Installation Notes



Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.