


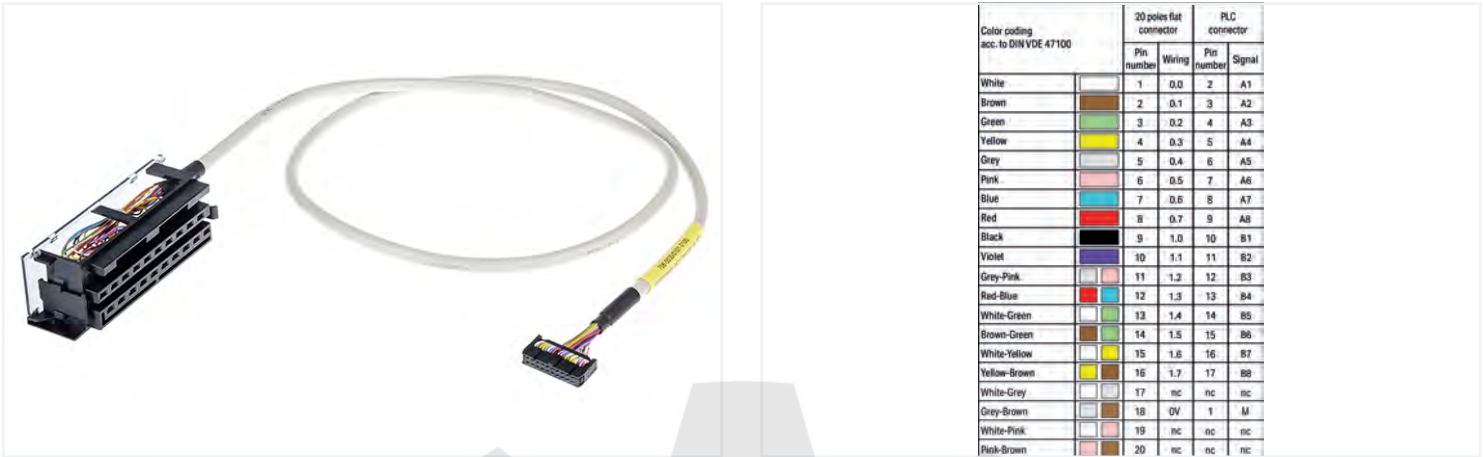

Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data	
Inputs/outputs	16 digital inputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Compatibility	
GE Fanuc	
GE Fanuc 9030	IC693 MDL241 IC693 MDL640 IC693 MDL643 IC693 MDL645 IC693 MDL646

Connection data	
Cable type	LiYY
Color code	per DIN VDE 47100
Connection 1	
Connector	Pluggable connector per DIN 41651; fe- male connector
Pole number 1	20
Connection type 1	System
Wire cross-section	0.14 mm²

Connection 2	
Connector 2	GeFanuc IC 693 ACC 311
Pole number 2	20
Connection type 2	System



Physical data	
Cable length	1 m

Material Data	
Fire load	0 MJ
Weight	185 g

Environmental requirements	
Ambient temperature (operation at U _N)	-20 ... +50 °C

Commercial data	
ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821386995
Customs tariff number	85444290900

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-5030/101-100	

Documentation	
System Description	
WAGO System Wiring, Selection Guide	pdf 533.15 KB 